



The Infinite Bandwidth Company™

MIC820

Teeny™ Ultra Low Power Op Amp

Final Information

General Description

The MIC820 is a rail-to-rail output, operational amplifier in *Teeny™* SC70 packaging. The MIC820 provides 5MHz, -3dB bandwidth while consuming an incredibly low 22 μ A supply current.

The SC70 packaging achieves significant board space savings over devices packaged in SOT-23 or MSOP-8 packaging. The SC70 occupies approximately half the board area of a SOT-23 package.

Features

- *Teeny™* SC70 packaging
- 5MHz, -3dB bandwidth product
- 4MHz gain-bandwidth product
- 22 μ A supply current
- Rail-to-Rail output
- Ground sensing at input common mode to GND
- Common mode to GND
- Drive large capacitive loads


Applications

- Portable equipment


Ordering Information

Part Number	Marking	Junction Temp. Range*	Package
MIC820BC5	A25	-40°C to +85°C	SC70-5

Pin Configuration

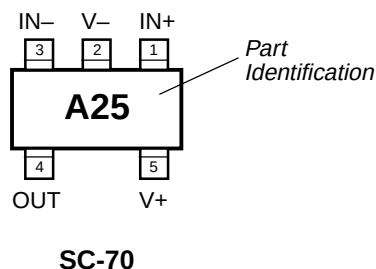

Functional Pinout



Teeny is a trademark of Micrel, Inc.

Micrel, Inc. • 1849 Fortune Drive • San Jose, CA 95131 • USA • tel + 1 (408) 944-0800 • fax + 1 (408) 944-0970 • <http://www.micrel.com>

Absolute Maximum Ratings (Note 1)

Supply Voltage ($V_{V+} - V_{V-}$) +6.0V
 Differential Input Voltage ($|V_{IN+} - V_{IN-}|$) +6.0V
 Input Voltage ($V_{IN+} - V_{IN-}$) $V_{V+} + 0.3V$, $V_{V-} - 0.3V$
 Lead Temperature (soldering, 5 sec.) 260°C
 Output Short Circuit Current Duration Indefinite
 Storage Temperature (T_S) 150°C
 ESD Rating, **Note 3**

Operating Ratings (Note 2)

Supply Voltage (V_S) +4.75V to +5.25V
 Ambient Temperature Range -40°C to +85°C
 Package Thermal Resistance 450°C/W

Electrical Characteristics (0V to 5V)

$V_{V+} = +5V$, $V_{V-} = 0V$, $V_{CM} = V+/2$; $R_L = 1M\Omega$; $T_A = 25^\circ C$, **bold** values indicate $-40^\circ C \leq T_A \leq +85^\circ C$; unless noted.

Symbol	Parameter	Condition	Min	Typ	Max	Units
V_{OS}	Input Offset Voltage			1	15	mV
	Input Offset Voltage Temp Coefficient			13		$\mu V/^\circ C$
I_B	Input Bias Current			0.165	5	nA
I_{OS}	Input Offset Current			0.1	5	nA
V_{CM}	Input Voltage Range	CMRR > 35dB	0		$V_{CC}-2.5$	V
CMRR	Common-Mode Rejection Ratio	$0 < V_{CM} < 2.5V$	35	50		dB
PSRR	Power Supply Rejection Ratio	Note 5	40	70		dB
A_{VOL}	Large-Signal Voltage Gain	$R_L = 1M$, $-0.5 < V_{OUT} < 3.5V$	60	72		dB
V_{OUT}	Maximum Output Voltage Swing	$R_L = 200k$	4.95	5		V
V_{OUT}	Minimum Output Voltage Swing	$R_L = 200k$	0	50		mV
BW	-3db Bandwidth			5		MHz
GBW	Gain-Bandwidth Product			4		MHz
SR	Slew Rate			5		V/ μs
I_{SC}	Short-Circuit Output Current	Source	2	2.85		mA
		Sink	0.15	0.26		mA
I_{GND}	Supply Current	$V_{CC} = \pm 2.5V$, $V_{OUT} = 0V$		22	35	μA
		$V_{CC} = \pm 2.5V$, $V_{OUT} = -2.5V$		35	60	μA

Note 1. Exceeding the absolute maximum rating may damage the device.








Note 2. The device is not guaranteed to function outside its operating rating.

Note 3. Devices are ESD sensitive. Handling precautions recommended. Human body model, 1.5k in series with 100pF. Pin 4 is ESD sensitive

Note 4. Exceeding the maximum differential input voltage will damage the input stage and degrade performance (in particular, input bias current is likely to increase).


Note 5. Supply Voltage change of 1V.

Typical Characteristics

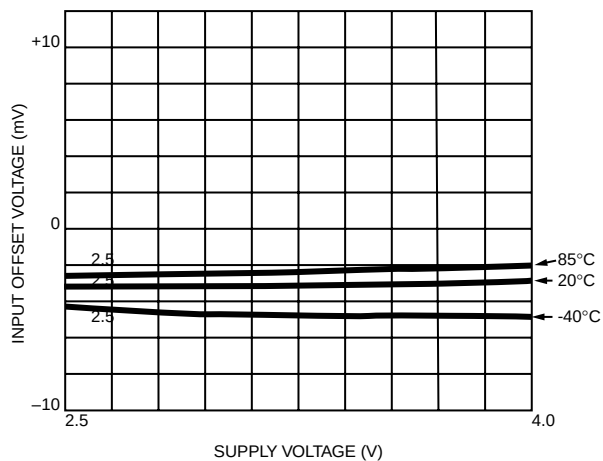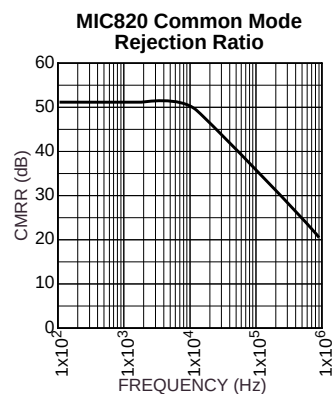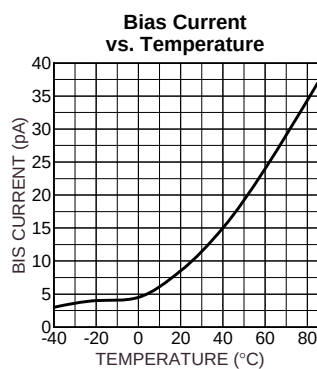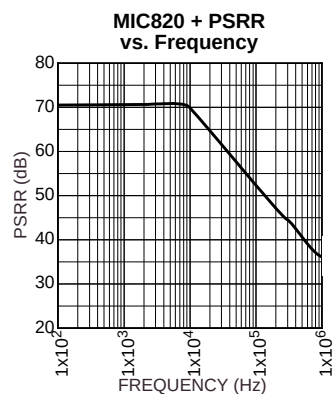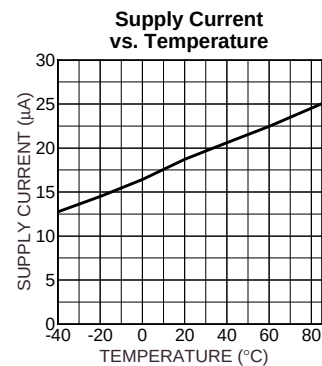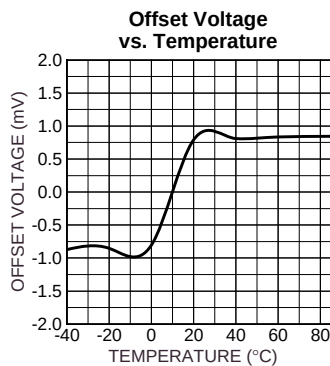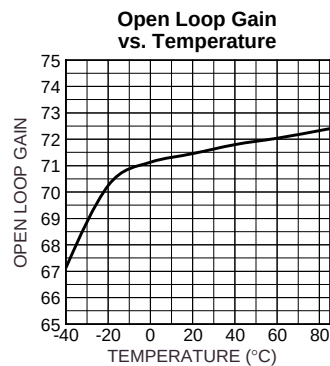


Functional Characteristics


Small-Signal Pulse Reponse
 $A_V=1$ $C_L=3pF$

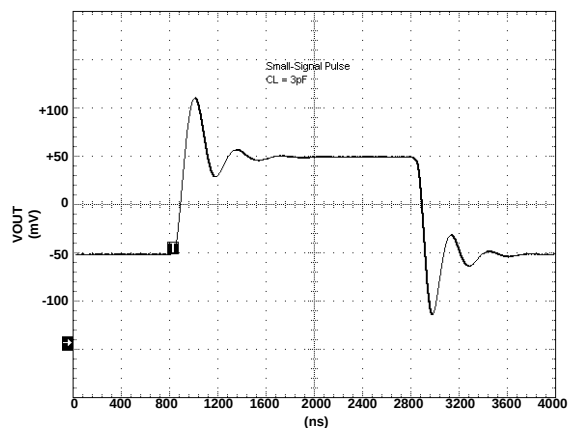


Small-Signal Pulse Reponse
 $A_V=1$ $C_L=100pF$

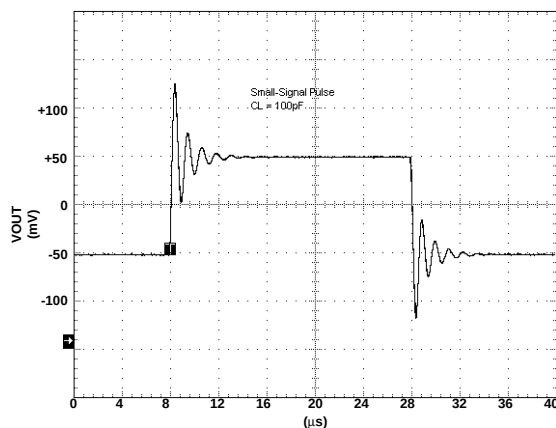


Large-Signal Pulse Reponse
 $A_V=1$ $C_L=10pF$

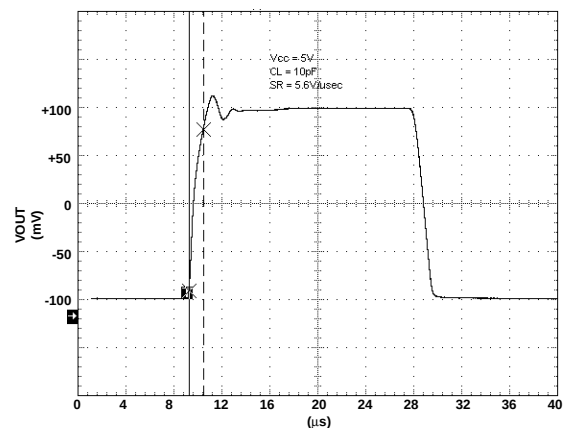


Gain Bandwidth of MIC820

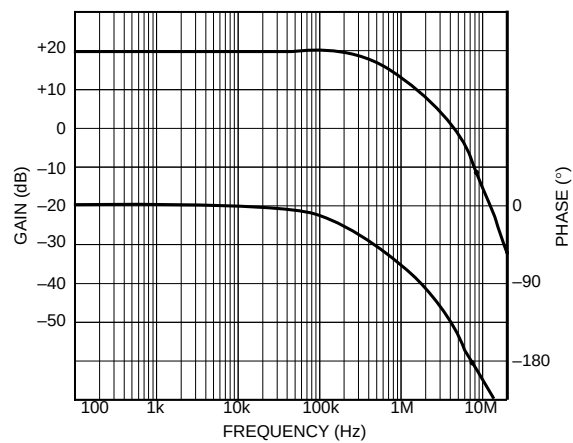

Closed Loop Frequency Response $A_V = 1$

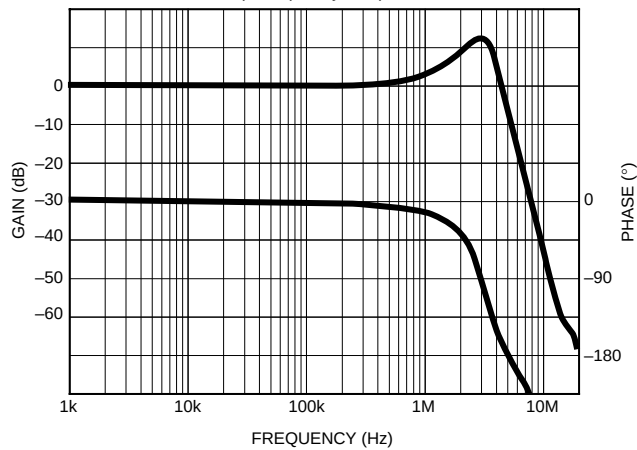

Closed Loop Gain ($A_V = +1$)
vs. Load Capacitance


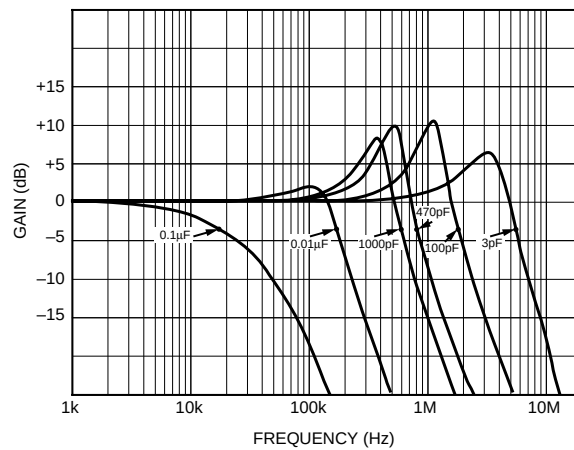


Applications Information


Power Supply Bypassing

Regular supply bypassing techniques are recommended. A 10 μ F capacitor in parallel with a 0.1 μ F capacitor on both the positive and negative supplies are ideal. For best performance all bypassing capacitors should be located as close to the op amp as possible and all capacitors should be low ESL (equivalent series inductance), ESR (equivalent series resistance). Surface-mount ceramic capacitors are ideal.

Package Information

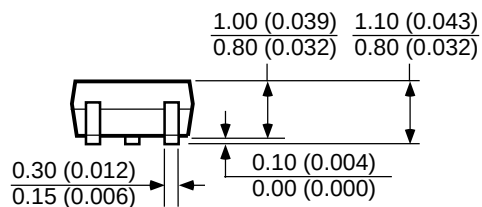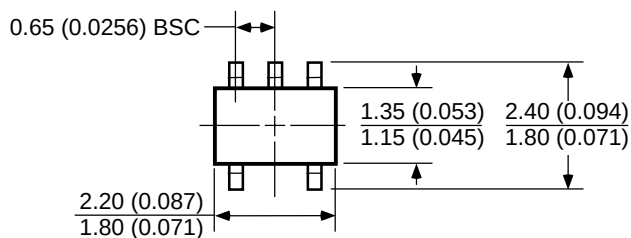

DIMENSIONS:
MM (INCH)



SC70-5

MICREL INC. 1849 FORTUNE DRIVE SAN JOSE, CA 95131 USA

TEL + 1 (408) 944-0800 FAX + 1 (408) 944-0970 WEB <http://www.micrel.com>

This information is believed to be accurate and reliable, however no responsibility is assumed by Micrel for its use nor for any infringement of patents or other rights of third parties resulting from its use. No license is granted by implication or otherwise under any patent or patent right of Micrel Inc.

© 2000 Micrel Incorporated