

SANYO**LA7625****Video, Chroma and Deflection Circuit for Color Television Sets****Overview**

The LA7625 is based on the LA7620 with the video circuit DC restoration factor changed to 100%. The LA7625 is small, multifunction ICs in which video, chroma and deflection circuits for NTSC color TV system are packaged in a shrink-type DIP30S (the same type as the earlier DIP22). In addition to being small, these ICs greatly reduce the number of components required and reduce the number of adjustments that must be made.

By combining the LA7625 with the LA7555 or LA7577 VIF/SIF IC, or LA7832, LA7833, LA7837, or LA7838 vertical output IC, it is possible to process all functions of the color television signal system. Note that the LA7625 has a peak clipping circuit built into the video circuit, and is suited primarily for compact sets.

Features

- Small package
- Few peripheral components needed.
- Few adjustments needed.
(The functions listed below require no adjustments.)
 - Chroma VCO (APC)
 - Horizontal oscillation H-Hold
 - Vertical oscillation V-Hold
- Multifunctional.

Specifications**Maximum Ratings at Ta = 25 °C**


Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V_{16} max		14.0	V
Maximum supply current	I_{22} max		15.0	mA
Allowable power dissipation	P_d max	$T_a \leq 65^\circ\text{C}$	1100	mW
Operating temperature	T_{opr}		-20 to +85	°C
Storage temperature	T_{stg}		-55 to +125	°C

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

Package Dimensions

unit : mm

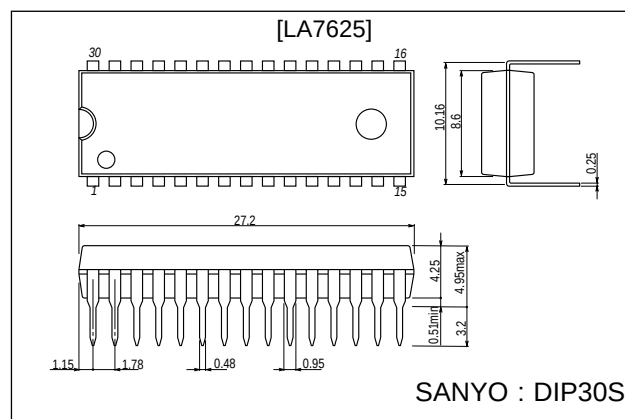3061-DIP30S**SANYO Electric Co.,Ltd. Semiconductor Company**

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

D3095HA (II)/62095HA (II)/9278YT/O306AT, TS No.2289-1/5

Operating Conditions at $T_a = 25\text{ }^{\circ}\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Recommended supply voltage	V_{16}		12.0	V
Recommended supply current	I_{22}		10.0	mA
Operating supply voltage range	$V_{16\text{ op}}$		9.0 to 14.0	V
Operating supply current range	$I_{22\text{ op}}$		8.5 to 15.0	mA

Electrical Characteristics at $T_a = 25\text{ }^{\circ}\text{C}$, $V_{CC} = V_{16} = 12\text{ V}$, $I_{CC} = I_{22} = 10\text{ mA}$

Parameter	Symbol	Conditions	min	typ	max	Unit
Circuit current	I_{16}	No signal	40	53	75	mA
[Deflection block]						
Horizontal supply voltage	V_{Z22}		8.2	8.7	9.2	V
Sync separation input DC level	$V_{S.S}$		9.0	9.3	9.6	V
Vertical free-running frequency	f_{V1}		$f_H/296.5$			Hz
	f_{V2}		$f_H/224.5$			Hz
Vertical blanking pulse width	PW V.blk		$19.25/f_H$			s
Vertical output pulse width	PW V.out		$10.25/f_H$			s
Vertical drive stage voltage gain	G_V		13	16.2	19	dB
Vertical output pulse start voltage	Vcds				4.0	V
Vertical pull-in operation start voltage	Vvps				4.0	V
Vertical blanking pulse wave peak value	VV.blk			10		V
Horizontal free-running frequency	f_H	Frequency deviation versus 15.734 kHz	-70	0	130	Hz
Dependence of horizontal oscillation frequency on supply voltage	$\Delta f_H(V)$	$f_H(8V) - f_H(7V)$	-10	0	10	Hz
Dependence of horizontal oscillation frequency on ambient temperature	$\Delta f_H/\Delta T$	$T_a = -10\text{ }^{\circ}\text{C}$ to $60\text{ }^{\circ}\text{C}$	-1.5		1.5	Hz/deg
Horizontal output pulse width	PW Hout		23.5	24.5	25.5	μs
Horizontal sync pull-in frequency range	$f_{H\text{pull}}$	Differential versus 15.734 kHz	400			Hz
			-500			Hz
Horizontal output pulse start voltage	$V_{H\text{pos}}$				5.5	V
Horizontal free-running frequency drift with time	Δf_{HT}	for 5 seconds to 30 minutes after power is applied	-50	-10	30	Hz
Horizontal blanking threshold level	$V_{H.blk}$		11			V
Horizontal output drive current	$I_{H.O}$		2.0		4.5	mA
Horizontal oscillation control sensitivity	B_{fH}	Reference value		236		Hz/ μA
Hold-down operation start voltage	V_{HD}		0.55	0.65	0.75	V
[Video block]						
Video tone control characteristics 1	RE1	$f = 2\text{ MHz}$, Video tone VR: 0 V	-5	-3	-1	dB
Video tone control characteristics 2	RE2	$f = 2\text{ MHz}$, Video tone VR: 12 V	12	15	18	dB
Video voltage gain	AV	$f = 100\text{ kHz}$, Video tone VR: 5.5 V	12	15	18	dB
Contrast control center	eo	$f = 100\text{ kHz}$, input: 100 mVp-p	0.2	0.3	0.4	Vp-p
Contrast variable range	Δeo	$f = 100\text{ kHz}$	16	18	20	dB
Bright control characteristics	BR1	No signal, bright VR: 3 V	8			V
	BR2	No signal, bright VR: 6 V	5.8	6.3	6.8	V
	BR3	No signal, bright VR: 9 V			4.5	V
Frequency characteristics	f	$f = 5\text{ MHz}/f = 100\text{ kHz}$	-5			dB
DC restoration factor	R_{DC}	STAIR STEP signal reference value		100		%


Continued on next page.

Continued from preceding page.


Parameter	Symbol	Conditions	min	typ	max	Unit
[Chroma Block]						
ACC amplitude characteristics	ACC1	Input: +6 dB	-3	0	+3	dB
	ACC2	Input : -20 dB	-7		+2	dB
ACC phase characteristics	ACC _φ 1	Input: +6 dB	-3		+3	deg
	ACC _φ 2	Input: -20 dB	-7		+7	deg
Killer operating point	EK		-55	-46	-40	dB
Color control center	B-Ycen	Output B-Y: color VR 6 V	2.9	4.3	5.5	Vp-p
Maximum demodulation output	B-Y max	Output B-Y: color VR 12 V	5.5	6.5		Vp-p
Color contrast variable range	Δ G cont	Output B-Y	15.5	17.0	18.5	dB
Tint center	T cen	Output B-Y: tint VR 6 V	-17	-5	+7	deg
Tint variable range	Δ T	Output B-Y	+45 -35			deg
APC pull-in range	Δ f APC		±300			Hz
Demodulation output ratio 1	R-Y/B-Y		0.81	0.90	0.98	
Demodulation output ratio 2	G-Y/B-Y		0.24	0.30	0.38	
Demodulation angle	∠R-Y/B-Y	Tint VR 6 V	96	104	112	deg
	∠G-Y/B-Y	Tint VR 6 V	-132	-122	-112	deg
Color difference output DC voltage	V9,10,11		6.7	7.2	7.7	V
Color difference output DC deviation voltage	Δ V9,10,11		-200		+200	mV

LA7625

Vertical output IC (LA7832, 7833) connection circuit example
Includes vertical stabilization circuit

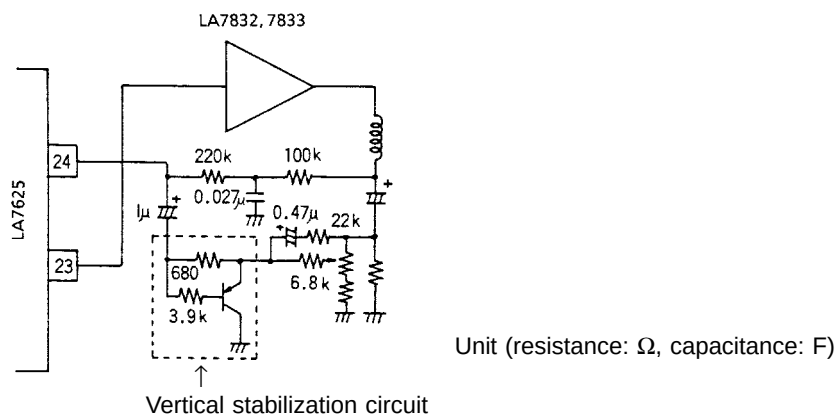

Vertical output IC (LA7837, 7838) connection circuit example

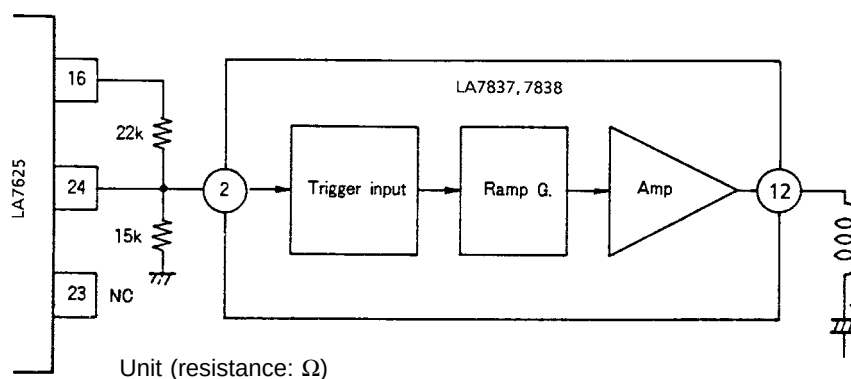

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of December, 1995. Specifications and information herein are subject to change without notice.