


OM1830SCM  
OM1830NCM

## 7.5 AMP LOW DROPOUT POSITIVE ADJUSTABLE REGULATOR APPROVED TO DESC DRAWING 5962-89520



**Three Terminal, Positive Adjustable Low Dropout Voltage Regulator In Hermetic JEDEC TO-258AA Package**

### FEATURES

- Similar To Industry Standard LT1083
- Approved To DESC Standardized Military Drawing Number 5962-8952001Y
- Adjustable Output Voltage
- Built In Thermal Overload Protection
- Short Circuit Current Limiting
- Available In Isolated Package
- Maximum Output Voltage Tolerance is Guaranteed To  $\pm 1\%$
- Guaranteed Dropout Voltage At Multiple Current Levels
- Product Also Available in Non-Isolated Package

### DESCRIPTION

This three terminal positive adjustable voltage regulator is designed to provide 7.5A with higher efficiency than conventional voltage regulators. This device is designed to operate down to 1 volt input to output differential and the dropout voltage is fully specified as a function of load current. Supplied in easy-to-use hermetic TO-258 package, this device is ideally suited for Military applications where small size and high reliability is required.

### ABSOLUTE MAXIMUM RATINGS @ 25°C

3.3

|   |                    |
|---|--------------------|
| Power Dissipation ( $P_d$ ) . . . . .             | Internally Limited |
| Input - Output Voltage Differential . . . . .     | 35 V               |
| Operating Junction Temperature Range . . . . .    | - 55°C to + 150°C  |
| Storage Temperature Range . . . . .               | - 65°C to + 150°C  |
| Lead Temperature (Soldering 10 seconds) . . . . . | 300°C              |
| Thermal Resistance:                               |                    |
| $\alpha_{JC}$ (Isolated) . . . . .                | 2.75°C/W           |
| $\alpha_{JC}$ (Non-Isolated) . . . . .            | 2.3°C/W            |
| Maximum Output Current . . . . .                  | 7.5 A              |

## OM1830SCM OM1830NCM

### ELECTRICAL CHARACTERISTICS -55°C T<sub>A</sub> +125°C (unless otherwise specified)

| Parameter                         | Symbol                      | Test Conditions  | Min.    | Max.  | Unit |
|-----------------------------------|-----------------------------|--|---------|-------|------|
| Reference Voltage                 | V <sub>REF</sub>            | V <sub>IN</sub> - V <sub>OUT</sub> ≈ 3.0 V,<br>I <sub>OUT</sub> = 10 mA, T <sub>A</sub> = 25°C   | 1.238   | 1.262 | V    |
|                                   |                             | 1.5 V V <sub>IN</sub> - V <sub>OUT</sub> ≈ 25 V,<br>10 mA I <sub>OUT</sub> 5.0 A   | • 1.225 | 1.270 | V    |
| Line Regulation<br>(Note 1)       | $\frac{3V_{OUT}}{3V_{IN}}$  | 1.5 V V <sub>IN</sub> - V <sub>OUT</sub> ≈ 15 V,<br>I <sub>OUT</sub> = 10 mA, T <sub>A</sub> = 25°C  |         | 0.2   | %    |
|                                   |                             | 15 V V <sub>IN</sub> - V <sub>OUT</sub> ≈ 35 V,<br>I <sub>OUT</sub> = 10 mA  | •       | 0.5   | %    |
| Load Regulation<br>(Note 1)       | $\frac{3V_{OUT}}{3I_{OUT}}$ | V <sub>IN</sub> - V <sub>OUT</sub> ≈ 3.0 V, T <sub>A</sub> = 25°C<br>10 mA I <sub>OUT</sub> 5.0 A  |         | 0.3   | %    |
|                                   |                             |  | •       | 0.4   | %    |
| Dropout Voltage                   | V <sub>DO</sub>             | I <sub>OUT</sub> = I <sub>FL</sub> , I <sub>FL</sub> = 5.0 A, 3V <sub>REF</sub> = 1%   | •       | 1.5   | V    |
| Thermal Regulation                | -                           | 30 ms pulse, T <sub>A</sub> = +25°C  |         | 0.01  | %/W  |
| Ripple Rejection                  | $\frac{3V_{IN}}{3V_{OUT}}$  | f = 120 Hz, C <sub>Adj</sub> = 25 μF,<br>C <sub>OUT</sub> = 25 μF (tantalum), I <sub>FL</sub> = 5.0 A,<br>V <sub>IN</sub> - V <sub>OUT</sub> ≈ 3.0 V, I <sub>OUT</sub> = I <sub>FL</sub> | • 60    |       | dB   |
| Adjust Pin Current                | I <sub>Adj</sub>            | 1.5 V V <sub>IN</sub> - V <sub>OUT</sub> ≈ 25 V<br>10 mA I <sub>OUT</sub> 5.0 A  | •       | 120   | μA   |
| Adjust Pin Current Change         | $\frac{3I_{Adj}}{3V_{OUT}}$ | 1.5 V V <sub>IN</sub> - V <sub>OUT</sub> ≈ 25 V<br>10 mA I <sub>OUT</sub> 5.0 A  | •       | 5.0   | μA   |
| Mimumin Load Current              | I <sub>Min</sub>            | V <sub>IN</sub> - V <sub>OUT</sub> ≈ 25 V  | •       | 10    | mA   |
| Current Limit                     | I <sub>Lim</sub>            | V <sub>IN</sub> - V <sub>OUT</sub> ≈ 5.0 V   | • 8.0   |       | A    |
|                                   |                             | V <sub>IN</sub> - V <sub>OUT</sub> ≈ 25 V  | • 0.4   |       | A    |
| Temperature Stability<br>(Note 2) | $\frac{3V_{OUT}}{3T}$       | -55°C T <sub>J</sub> +125°C  | •       | 1.5   | %    |
| Long Term Stability<br>(Note 2)   | $\frac{3V_{OUT}}{3T}$       | T <sub>A</sub> = +125°C, t = 1000 hrs  |         | 1.0   | %    |

#### Notes:

1. Line and Load Regulation are measured at a constant junction temperature using a low duty cycle pulse technique. Although power dissipation is internally limited, regulation is guaranteed up to the maximum power dissipation of 60 W. Power dissipation is determined by the input/output differential voltage and the output current. Guaranteed maximum power dissipation will not be available over the full input/output voltage range.
2. Guaranteed by design, characterization or correlation to other tested parameters.
3. The • denotes the specifications which apply over the full operating temperature range.

#### PART NUMBER DESIGNATOR


Standard Military Drawing Number      Omnirel Part Number  
 8952001Y                                    OM1830SCM  
 8952001Z                                    OM1830NCM

"Y" = Isolated


## OM1830SCM OM1830NCM

### TYPICAL PERFORMANCE CHARACTERISTICS


**LOAD REGULATION**

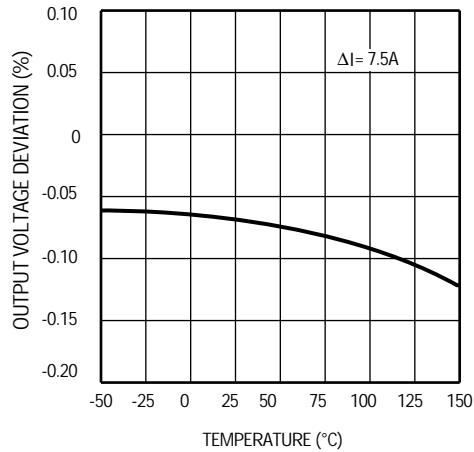


**SHORT CIRCUIT CURRENT**

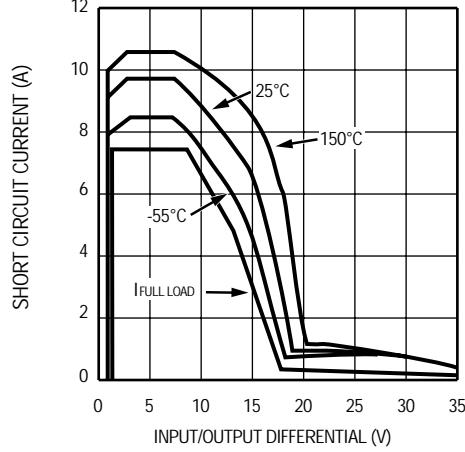


**ADJUSTMENT PIN CURRENT**

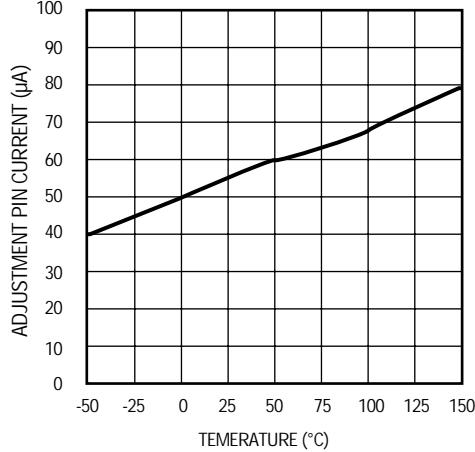

**DROPOUT VOLTAGE**

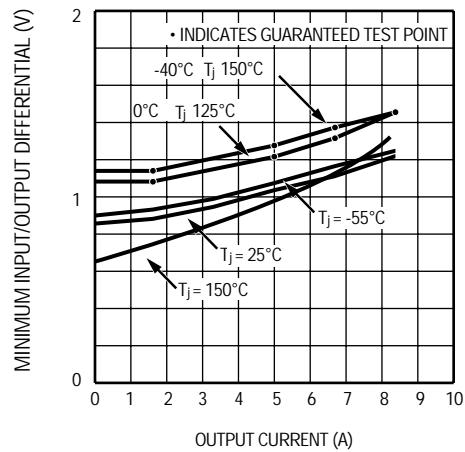


**TEMPERATURE STABILITY**

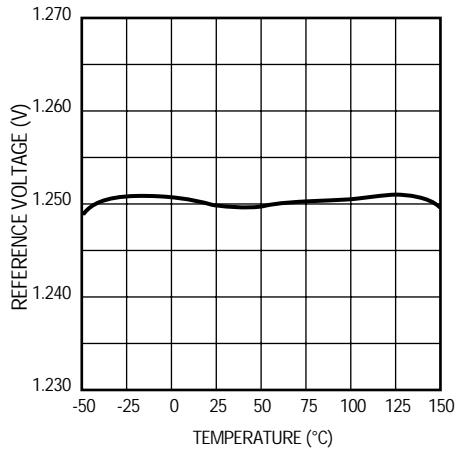

3.3


**MINIMUM OPERATING CURRENT**

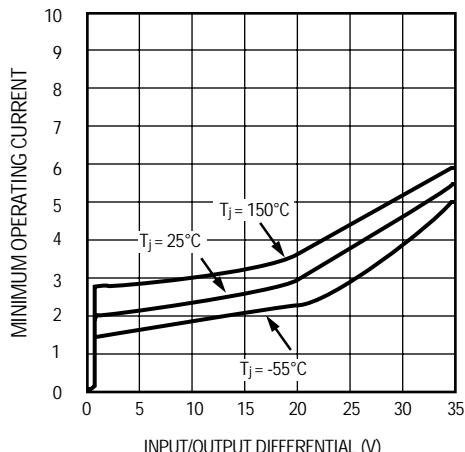


## OM1830SCM OM1830NCM

### TYPICAL APPLICATIONS


#### Paralleling Regulators

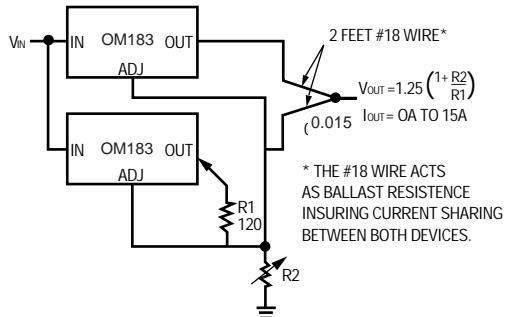

#### Improving Ripple Rejection

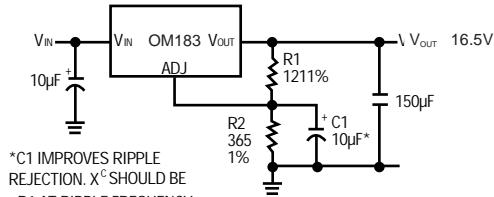


#### 1.2V - 15V Adjustable Regulator

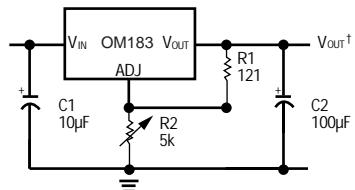


$\dagger V_{OUT} = 1.25V \left(1 + \frac{R_2}{R_1}\right)$


#### 5V Regulator with Shutdown

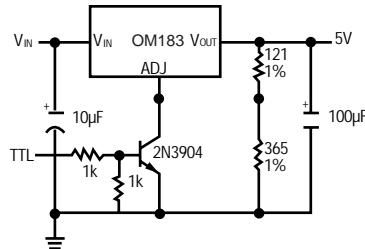

### MECHANICAL OUTLINE

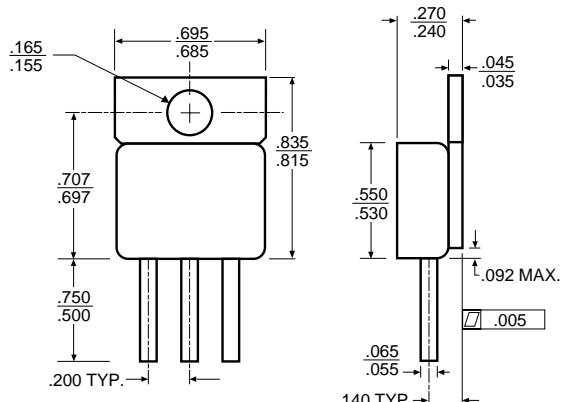

### CONNECTION DIAGRAM

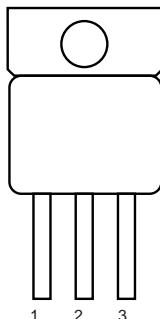

#### NOTES

- Case is metal/hermetically sealed
- Isolated Tab

- 1 Adjust  
 2 V<sub>OUT</sub>  
 3 V<sub>IN</sub>