



FEATURES

- RoHS compliant
- Twin independent outputs
- Input/output isolation 1kVDC
- Output/output isolation 1kVDC
- Power sharing on outputs
- Efficiency to 80%
- Power density 0.85W/cm³
- UL 94V-0 package material
- Footprint from 1.17cm²
- 5V & 12V input
- One 5V output (V1)
- 3.3V, 5V, 9V, 12V and 15V output (V2)
- No heatsink required
- Internal SMD construction
- Fully encapsulated with toroidal magnetics
- No external components required
- MTTF up to 1.6 million hours
- Custom solutions available
- PCB mounting

DESCRIPTION

The NMD series of DC/DC converters are ideally suited to applications where a potential difference exists between loads, e.g. motor control circuits. The twin outputs offer cost and space savings by consolidating two DC/DC converters into one package. All of the rated power may be drawn from a single output provided the total load does not exceed 1 watt.



www.murata-ps.com

NMD Series

Isolated 1W Twin Output DC/DC Converters

SELECTION GUID)E								
Order Code	Nominal Input Voltage	Output Voltage 1	Output Voltage 2	Output Current 1	Output Current 2	Efficiency	MTTF ¹	Package Style	
	V	V	V	mA	mA	%	kHrs		
NMD050503DC	5	5	3.3	100	152	70	1615		
NMD050505DC	5	5	5	100	100	70	1615	DIP	
NMD050509DC	5	5	9	100	56	80	669		
NMD050512DC	5	5	12	100	42	80	339		
NMD050515DC	5	5	15	100	34	80	187		
NMD050503SC	5	5	3.3	100	152	70	1615		
NMD050505SC	5	5	5	100	100	70	1615	SIP	
NMD050509SC	5	5	9	100	56	80	669		
NMD050512SC	5	5	12	100	42	80	339		
NMD050515SC	5	5	15	100	34	80	187		
NMD120505DC	12	5	5	100	100	70	489		
NMD120509DC	12	5	9	100	56	80	343	DIP	
NMD120512DC	12	5	12	100	42	80	229	UIP	
NMD120515DC	12	5	15	100	34	80	148		
NMD120505SC	12	5	5	100	100	70	489		
NMD120509SC	12	5	9	100	56	80	343	SIP	
NMD120512SC	12	5	12	100	42	80	229	OIP	
NMD120515SC	12	5	15	100	34	80	148		

When operated **with** additional external load capacitance the rise time of the input voltage will determine the maximum external capacitance value for guaranteed start up. The slower the rise time of the input voltage the greater the maximum value of the additional external capacitance for reliable start up.

INPUT CHARACTERISTICS						
Parameter	Conditions	Min.	Тур.	Max.	Units	
Voltago rongo	Continuous operation, 5V input types	4.5	5.0	5.5	V	
Voltage range	Continuous operation, 12V input types	10.8	12	13.2	v	

OUTPUT CHARACTERISTICS

Parameter	Conditions	Min.	Тур.	Max.	Units
Rated power ²	T _A =0°C to 125°C			1.0	W
Voltage set point accuracy	See tolerance envelope				
Line regulation	High VIN to low VIN		1.0	1.2	%/%
	10% load to rated load, 3.3V output types			15	%
	10% load to rated load, 5V output types			15	
Load regulation	10% load to rated load, 9V output types			10	
	10% load to rated load, 12V output types			10	
	10% load to rated load, 15V output types			10	
Ripple and noise	BW=DC to 20MHz, all output types			75	mV p-p

ABSOLUTE MAXIMUM RATINGS

Short-circuit protection ³	1 second
Lead temperature 1.5mm from case for 10 seconds	300°C
Input voltage VIN, NMD05 types	7V
Input voltage V _{IN} , NMD12 types	15V

1. Calculated using MIL-HDBK-217F with nominal input voltage at full load.

2. See derating curve.

- 3. Supply voltage must be disconnected at the end of the short circuit duration.
 - All specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified.

muRata P₅ Murata Power Solutions


NMD Series

Isolated 1W Twin Output DC/DC Converters

		ISOLATION CHARACTERISTICS					
Min.	Тур.	Max.	Units				
1000			VDC				
1			GΩ				
		21 [.]					

GENERAL CHARACTERISTICS					
Parameter	Conditions	Min.	Тур.	Max.	Units
Switching frequency	All input types		100		kHz

TEMPERATURE CHARACTERISTICS						
Parameter	Conditions		Min.	Тур.	Max.	Units
Specification	All output types		0		70	00
Storage			-55		150	- U
Cooling	Free air convection					

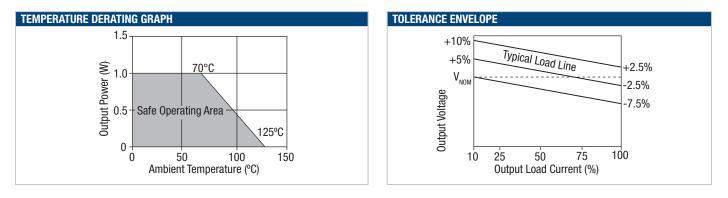

TECHNICAL NOTES

ISOLATION VOLTAGE

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions NMD series of DC/DC converters are all 100% production tested at their stated isolation voltage. This is 1kVDC for 1 second.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

For a part holding no specific agency approvals, such as the NMD series, both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

REPEATED HIGH-VOLTAGE ISOLATION TESTING

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. The NMD series has toroidal isolation transformers, with no additional insulation between primary and secondary windings of enameled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

This consideration equally applies to agency recognized parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.

RoHS COMPLIANCE INFORMATION



This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300°C for 10 seconds. The pin termination finish on the SIP package type is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. The DIP types are Matte Tin over Nickel Preplate. Both types in this series are backward compatible with Sn/Pb soldering systems. For further information, please visit www.murata-ps.com/rohs

For further information, please visit www.inurata-ps.com/ro

www.murata-ps.com


Technical enquiries - email: mk@murata-ps.com, tel: +44 (0)1908 615232

KDC_NMDC.DO2 Page 2 of 4

muRata Ps Murata Power Solutions

NMD Series

Isolated 1W Twin Output DC/DC Converters

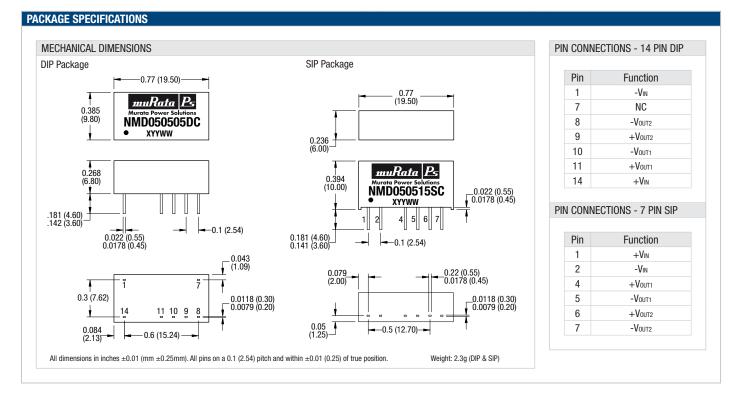


Technical enquiries - email: mk@murata-ps.com, tel: +44 (0)1908 615232

muRata Ps Murata Power Solutions

NMD Series

Isolated 1W Twin Output DC/DC Converters

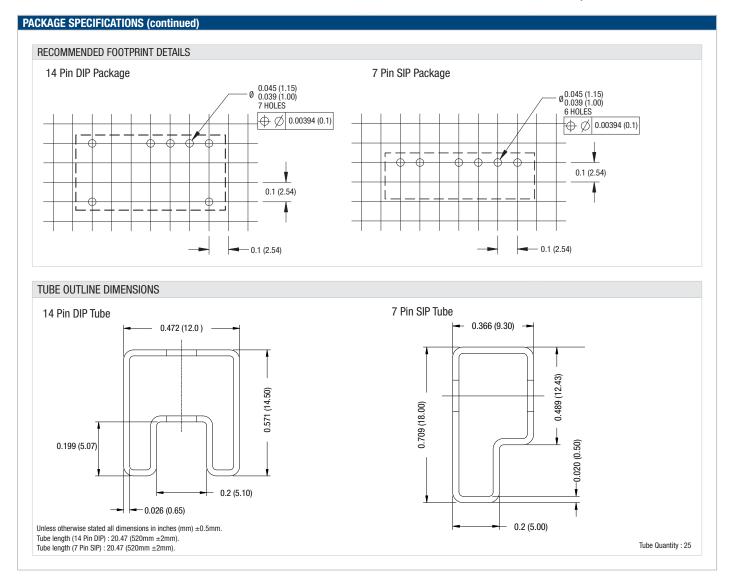

muRata Ps Murata Power Solutions

Murata Power Solutions, Inc. 11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A. Tel: (508) 339-3000 (800) 233-2765 Fax: (508) 339-6356 www.murata-ps.com email: sales@murata-ps.com ISO 9001 REGISTERED

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

www.murata-ps.com

USA:	Tucson (Az), Tel: (800) 547 2537, email: sales@murata-ps.com
Canada:	Toronto, Tel: (866) 740 1232, email: toronto@murata-ps.com
UK:	Milton Keynes, Tel: +44 (0)1908 615232, email: mk@murata-ps.com
France:	Montigny Le Bretonneux, Tel: +33 (0)1 34 60 01 01, email: france@murata-ps.com
Germany:	München, Tel: +49 (0)89-544334-0, email: munich@murata-ps.com
Japan:	Tokyo, Tel: 3-3779-1031, email: sales_tokyo@murata-ps.com Osaka, Tel: 6-6354-2025, email: sales_osaka@murata-ps.com Website: www.murata-ps.jp
China:	Shanghai, Tel: +86 215 027 3678, email: shanghai@murata-ps.com Guangzhou, Tel: +86 208 221 8066, email: guangzhou@murata-ps.com

Technical enquiries - email: mk@murata-ps.com, tel: +44 (0)1908 615232