RM51 miniature relays





Contact data

- DC coils of up to 48 V DC, insulation class F: 155 °C
- For PCB
- Small dimensions
- High switching capacity
- Application: for household electrical appliance, automation systems, electronic equipment, instrument and meter, telecommunication devices, remote control facilities
- Recognitions, certifications, directives: RoHS, continuous (pressure pending)

| Contact data | | | C TLAUS | | | |
|---|---------------|--|-----------------------|--|--|--|
| Number and type of contacts | | 1 CO, 1 NO | | | | |
| Contact material | | AgSnO ₂ | | | | |
| Rated / max. switching voltage | AC | 250 V / 277 V | | | | |
| Min. switching voltage | | 5 V | | | | |
| Rated load | AC1 | 1 CO: 10 A / 7 A (NO/NC) / 250 V AC | | | | |
| | | 1 CO: 20 A / 20 A (NO/NC) / 125 V AC | 1 NO: 20 A / 125 V AC | | | |
| | DC1 | 1 CO: 10 A / 7 A (NO/NC) / 30 V DC | 1 NO: 10 A / 30 V DC | | | |
| Min. switching current | | 15 mA | | | | |
| Rated current | | 10 A | | | | |
| Max. breaking capacity | AC1 | 3 000 VA | | | | |
| | AC3 | 1 CO: 750 W / 375 W (NO/NC) | 1 NO: 750 W | | | |
| | | 1 CO: 1,0 HP / 0,5 HP (NO/NC) UL 508 | 1 NO: 1,0 HP UL 508 | | | |
| | | (single-phase motor) | (single-phase motor) | | | |
| Contact resistance | | ≤ 100 mΩ | | | | |
| Coil data | | | | | | |
| Rated voltage | DC | 5 48 V | | | | |
| Must release voltage | | DC: ≥ 0,05 U _n | | | | |
| Operating range of supply voltage | | see Table 1 | | | | |
| Rated power consumption | DC | 0,36 W | | | | |
| Insulation according to PN-EN 60 | 664-1 | | | | | |
| Rated surge voltage | | 4 000 V 1,2 / 50 µs | | | | |
| Insulation resistance | | 250 MΩ 500 V DC, 60 s | | | | |
| Dielectric strength | | | | | | |
| between coil and contacts | | 2 500 V AC type of insulation: basic | | | | |
| contact clearance | | 1 000 V AC type of clearance: micro-disconnection | | | | |
| Contact - coil distance | | | | | | |
| clearance | | ≥ 1,9 mm | | | | |
| • creepage | | ≥ 1,9 mm | | | | |
| General data | | | | | | |
| Operating / release time (typical values) | | 15 ms / 10 ms | | | | |
| Electrical life (number of cycles) | , | | | | | |
| ` |) cycles/hour | 10 ⁵ 1 CO: 10 A / 7 A (NO/NC), 250 V AC | 1 NO: 10 A, 250 V AC | | | |
| |) cycles/hour | 10 ⁵ 1 CO: 10 A / 7 A (NO/NC), 30 V DC | 1 NO: 10 A, 30 V DC | | | |
| Mechanical life 18 000 cycles/hour | | 107 | | | | |
| Dimensions (L x W x H) | | 19,5 x 16 x 17,1 mm | | | | |
| Weight | | 10 g | | | | |
| Ambient temperature • operating | | -40+85 °C | | | | |
| Cover protection category | | IP 64 PN-EN 60529 | | | | |
| Shock resistance | | 10 g | | | | |
| Vibration resistance | | 1,0 mm DA (constant amplitude) 1055 Hz | | | | |
| Solder bath temperature | | max. 235 °C | | | | |
| Soldering time | | max. 3 s | | | | |
| | | | | | | |

The data in bold type pertain to the standard versions of the relays.




RM51 miniature relays

Coil data - DC voltage version

Table 1


| Coil code | Rated voltage V DC | Coil resistance at 20 °C Ω | Acceptable resistance | Coil operating range V DC | |
|-----------|-----------------------|----------------------------------|-----------------------|------------------------------|-----------------|
| | | | | min. (at 20 °C) | max. (at 20 °C) |
| 1005 | 5 | 69 | ± 10% | 3,75 | 6,5 |
| 1009 | 9 | 225 | ± 10% | 6,75 | 11,7 |
| 1012 | 12 | 400 | ± 10% | 9,00 | 15,6 |
| 1024 | 24 | 1 600 | ± 10% | 18,00 | 31,2 |
| 1048 | 48 | 6 400 | ± 10% | 36,00 | 62,4 |

Dimensions

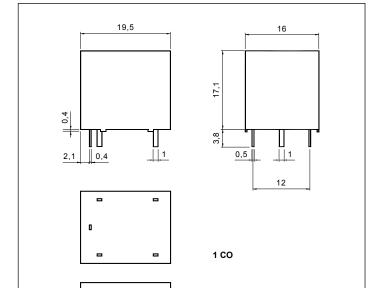


1 NO

Connection diagrams (pin side view)

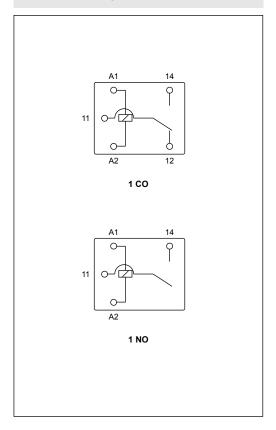

Pinout (solder side view)


12,2

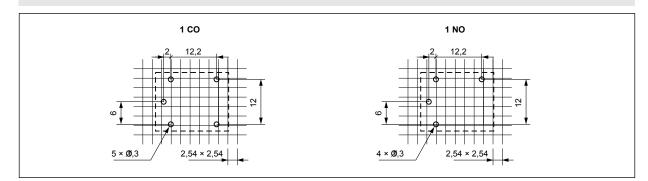

Mounting

Relays RM51 are designed for direct PCB mounting.

Ordering codes

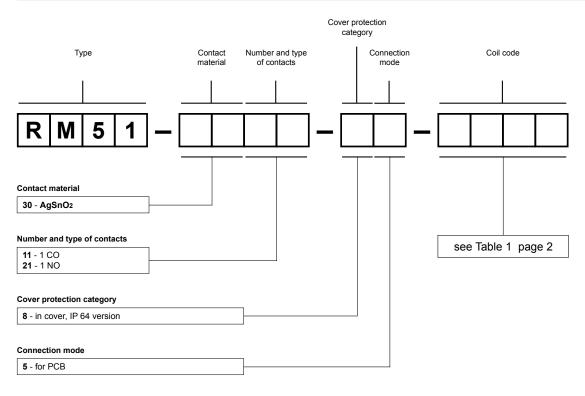

Examples of ordering codes:

RM51-3011-85-1012 relay RM51, for PCB, one changeover contact, contact material AgSnO₂, coil voltage

12 V DC, in cover IP 64

RM51-3021-85-1048 relay RM51, for PCB, one normally open contact, contact material AgSnO2, coil voltage

48 V DC, in cover IP 64

PRECAUTIONS:

1. Ensure that the parameters of the product described in its specification provide a safety margin for the appropriate operation of the device or system and never use the product in circumstances which exceed the parameters of the product. 2. Never touch any live parts of the device. 3. Ensure that the product has been connected correctly. An incorrect connection may cause malfunction, excessive heating or risk of fire. 4. In case of any risk of any serious material loss or death or injuries of humans or animals, the devices or systems shall be designed so to equip them with double safety system to guarantee their reliable operation.

