

Electro-Pyrotechnic Initiator Thin Film Chip Resistor



Electro-pyrotechnic initiator resistors, also known as bridge resistors, are resistive elements, which convert electrical energy into heat energy in a precise electro-thermal profile for the purpose of initiating a series of pyrotechnic events in a controlled energetic reaction. In automotive applications this effect is used to deploy automotive airbags and other safety devices. These same devices are also used in military applications for pilot ejection systems, explosive bolt disengagement of airborne missiles, chaff dispensers, artillery projectile activators, anti-tank mines, etc. Commercially, they are used in mining and de-constructions applications.

PRINCIPLE OF OPERATION

The two main parameters of an EPIC are “no fire” and “all fire” conditions.

“No fire” represents the immunity of the resistor to the environmental electro-magnetic pollution and electric continuity test: Therefore customer will have to provide Vishay Sfernice with “no firing” conditions: Maximum

FEATURES

Vishay has developed a special thin film resistor chip specifically designed to provide pyrotechnic engineers with a lot of advantages

- Firing energy down to 50 μ J
- Firing time down to 50 μ s
- Ohmic range: 2R to 10R
- Compatibility with various pyrotechnic composition even with no primer
- Joule effect ignition or flash ignition for very fast firing
- Easy set up by design of firing levels
- “No fire”/“all fire” ratio up to 70 %
- Very predictable, reproducible and reliable behaviour
- Size: 0603 preferred - other size available upon request
- Material categorization: For definitions of compliance please see www.vishay.com/doc?99912



RoHS*
COMPLIANT

Note

* Lead (Pb)-containing terminations are not RoHS-compliant. Exemptions may apply.

current and longest duration when part should not ignite the explosive powder.

“All fire” represents the command pulse. Customer will have to provide Vishay Sfernice with “all firing” conditions: Minimum current, duration necessary to ignite the explosive powder.

STANDARD ELECTRICAL SPECIFICATIONS

| MODEL | SIZE | RESISTANCE RANGE Ω | RATED POWER $P_{70^{\circ}\text{C}}$ W | NO FIRE CURRENT A | NO FIRING DURATION s | ALL FIRING CURRENT A | ALL FIRING DURATION ms | ALL FIRING ENERGY μ J |
|-------|------|------------------------------|--|----------------------|-------------------------|-------------------------|---------------------------|------------------------------|
| EPIC | 0603 | 2 to 10 | 0.125 | 0.3 to 0.8 | 2 to 5 | 0.8 to 1.3 | 0.05 to 0.5 | 50 to 1000 |


MECHANICAL SPECIFICATIONS

- Substrate: Special alumina based substrate
- Resistive element: Fine line patterned Tantalum nitride thin film layer
- Diffusion and conductive thin film layers
- Terminations: Wraparound over nickel barrier

TECHNOLOGY

This technology contributes to the stability of the heating element, the precise electro-thermal response profile and the ability to design a precise activation energy.

All these features are perfectly controlled on high production volumes.

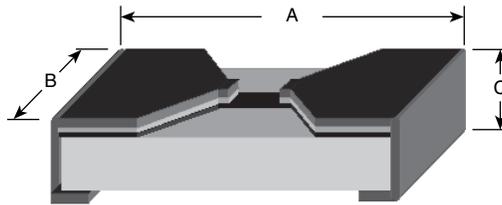DIMENSIONS in millimeters (inches)


| CASE SIZE | DIMENSION | | |
|-----------|--|--|--|
| | A | B | C |
| | MAX. TOL. + 0.152 (0.006) MIN. TOL. - 0.152 (0.006) | MAX. TOL. + 0.127 (0.005) MIN. TOL. - 0.127 (0.005) | MAX. TOL. + 0.127 (0.005) MIN. TOL. - 0.127 (0.005) |
| 0603 | 1.52 (0.060) | 0.75 (0.030) | 0.5 (0.020) |

EXAMPLE OF APPLICATION

Chip: 0603

R: 2R ± 0R2

Energy: Around 1.5 mJ

Response time: 0.2 ms

Mounting Recommendations

EPIC can be mounted either on a PCB or on a squib. Please refer to Application Note (www.vishay.com/doc?53044) to see Vishay Sfernice recommendations. If needed Vishay Sfernice can help customers to mount EPIC onto squibs. Please contact sfer@vishay.com.

AIRBAGS INITIATORS

A prerequisite to valid reliability estimation of an electro-explosive device (EED) is a sensitivity test program carefully chosen and properly performed. The Bruceton Method (or up and down method) of sensitivity testing was developed specifically for ordnance testing. Here under is an example of Bruceton's test results.

2 customers: Customer A and customer B have equipped squibs of their own with 3 variants (Variant 1, 2 and 3). Bruceton's test results of Vishay heating elements are shown in Table 1.

| HEATING ELEMENT | CUSTOMER A | | CUSTOMER B | |
|-----------------|------------|------------|------------|------------|
| | NF (in mA) | AF (in mA) | NF (in mA) | AF (in mA) |
| Variant 1 | 546 | 766 | 538 | 776 |
| Variant 2 | 571 | 839 | 577 | 859 |
| Variant 3 | 619 | 891 | 612 | 875 |

CONCLUSION


Bruceton test results are self explanatory. They show that the electro-thermal behavior of EPIC is predictable, precise and reproducible.

For more information please read the Application Note (www.vishay.com/doc?53044).

HOW TO GET THE RIGHT EPIC

Each EPIC will have to be adapted to customer pyrotechnic element. To reach the right product, Vishay Sfernice works by "iteration". Upon receipt of the EPIC Design Guide (www.vishay.com/doc?53045) duly filled, an initial sampling lot is given to customer (along with an EPIC reference) so he can provide Vishay Sfernice with "no firing"/"all firing" conditions.

Then Vishay Sfernice will be able to provide a new set of samples (eventually tooling charges will be necessary). Ohmic value of samples will remain the same, but there will be a new compromise between the length, the width and the thickness of the filament so as to increase the sensitivity of the EPIC and adapt the firing conditions to the pyrotechnic element of the customer. When the right parameters are reached Vishay Sfernice will design a final set of mask (with the participation of the customer).

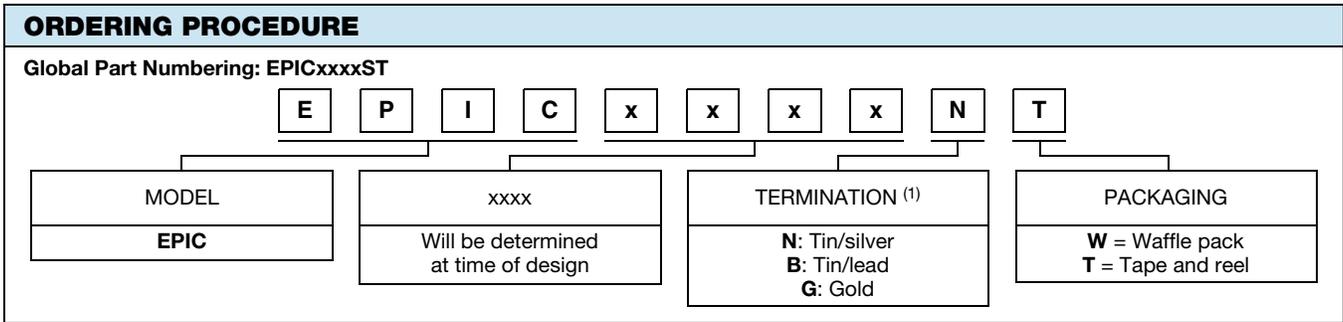

Notes

⁽¹⁾ Tin/lead: Please consult

- EPIC being a semi-custom product, please fill EPIC Design Guide (www.vishay.com/doc?53045) and send to sfer@vishay.com to get appropriate part number.
- Per Vishay policy all the components designed for automotive applications should be tested in accordance to AEC-Q200 specification. As the EPIC is just part of an ignitor which is designed and qualified by each customer Vishay is not proceeding to any AEC-Q200 test.



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.