
NL-1053 IGNITRON

Size D 355 Amperes dc

National Ignitron NL-1053 is a metal, water-cooled, mercury pool tube designed especially for welder control and similar AC control application. Its rating is approximately equivalent to a 1200 ampere magnetic contactor.

NL-1053 utilizes a thermostat mount brazed solidly to the cathode header and cooling coil to give accurate temperature indication and tube protection. The large stainless steel envelope with internal cooling coil greatly increases the cooling surface for long life and arc-back-free operation.

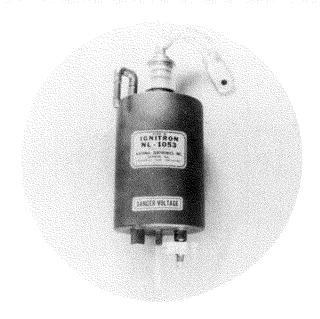



TECHNICAL INFORMATION


IECANICAL II	NFORMATION
AC Control Applications — Ratings are based on	full-cycle conduction (no phase delay) regardless of
whether or not phase control is used, on frequencies from 25 to 60 cycles, and any voltage between 250 and	
600 volts rms. Ratings are for two tubes in inverse par	
1Maximum demand — kva	¹ Maximum averaging time — seconds at 600 volts rms
¹ Corresponding maximum average anode current per tube — amps DC 192	at 250 volts rms 22.
	Maximum surge current —
1Maximum average anode current per tube — amps DC 355	peak amps
1Corresponding maximum demand — kva 800	of max. rms demand current
² Rectifier Applications — Ratings are based on int	ermittent duty on no phase delay and on frequencies
from 50 to 60 cycles. When phase control is used, cur	
from 50 to 60 cycles. When phase control is used, cut	tent rainigs are reduced as per phase control current
rating curve. Values are for one tube.	
Maximum peak anode voltage volts	Max. ratio of average to peak current, maximum averaging time 0.2 seconds
Corresponding average current — amps DC 54 40 32	Max. ratio of peak fault to peak anode current 12.5 12.5 12.5
Maximum average anode current—amps DC 190 140 112 Corresponding neak current — amps1140 840 672	Maximum duration time of fault current
Corresponding peak current — amps	— sec
maximum averaging time, sec 0.5 0.5	
Ignition Requirements — (Same for both applicat	tions.)
Ignitor Voltage	Ignitor Current
Maximum instantaneous allowed,	Maximum instantaneous allowed — amperes 100
ignitor positive anode voltage	3Maximum instantaneous required — amperes
Maximum instantaneous required	Maximum rms allowed — amperes 10
ignitor positive — volts	Maximum average allowed — ampere 1
Maximum instantaneous allowed,	³ Ignitor ignition time maximum — microseconds 100
ignitor negative — volts	Ignitor current max. averaging time — seconds 5
Cooling Requirements — (Same for both applicat	rions)
Cooling Requirements — (Same for both applicat	
Type of cooling	Approximate water flow required at continuous full load GPM11/2 to 3
Minimum inlet water temperature °C 0	Water flow may be reduced if cooling system
Maximum cooling system temperature (measured at thermostat mount) — °C	temperature is maintained within limits.
Rectifier Applications	Pressure drop per tube at 3 GPM — lbs. per sq. in
AC Control Applications	Water temperature rise at 3 GPM, full load - °C
At 600 volts rms 50 At 500 volts rms 55	Approx. temperature rise, water at inlet to thermostat
At 250 volts rms	mount (at full load and at 3 GPM) — °C 10
GENERAL CHA	RACTERISTICS
Number of Anodes 1	Peak arc drop at 1115 peak amps - approx. volts
Number of Ignitors	
Mounting Position Vertical	Net weight — lbs
Peak arc drop at 13,600 peak amps — approx. volts 36	Approx. shipping weight — lbs,
1Using log-log paper, straight line interpolation of RMS Demand Current vs. Average Anode Current and Maximum Averaging	
Time vs. Anode Voltage may be used to determine intermediate ratings.	
2Using log-log paper, straight line interpolation of Peak Anode (Current vs. Average Anode Current may be used to determine
intermediate ratings. See curves for details. 3Ignition will occur if either maximum required instantaneous p	potential is applied or maximum required instantaneous current
flows for the rated maximum ignitor ignition time.	


Printed in USA 11-57 GR

NL-1053 IGNITRON

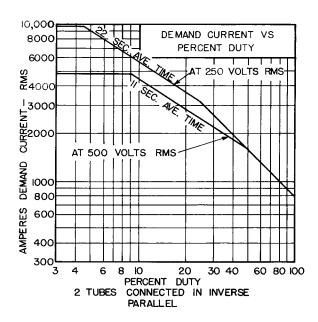

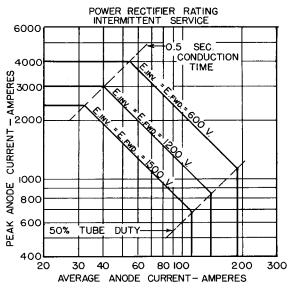

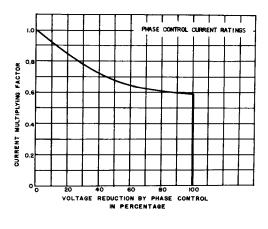

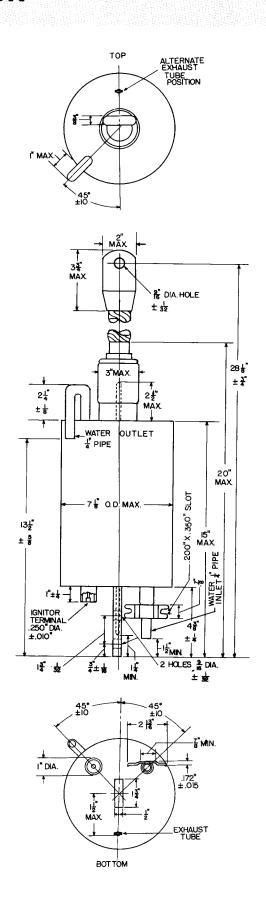

NATIONAL ELECTRONICS, INC.

GENEVA, ILLINOIS, U. S. A.