

# -PRODUCT INFORMATION -

Page 1

12-70

**6JD5** 

# **Compactron Beam Triode**

TUBES

COLOR TV TYPE

■ 35 WATTS PLATE DISSIPATION

■ DIFFUSION BONDED CATHODE

■ TRANSCONDUCTANCE = 55000 MICROMHOS

■ 300 MILLIAMPERES PEAK PLATE CURRENT

The 6JD5 is a compactron beam triode suited for use as a pulse-type high-voltage regulator in high-voltage power supply of color television receivers.

Features of the 6JD5 include a diffusion bonded cathode coating which provides a positive bond between the cathode coating and base material, thereby practically eliminating grid-to-cathode shorts caused by cathode flaking. By operating at a relatively low potential (3500 volts), this pulse-type regulator provides much less stress on internal components than shunt regulators operating in the 25000-volt range.

### **GENERAL**

## 

#### **MECHANICAL**

Operating Position - Any Envelope - T-12, Glass Base - E12-74, Button 12-Pin


Outline Drawing

atimo braning	
Maximum Diameter	Inches
Minimum Diameter	Inches
Maximum Over-all Length4.250	Inches
Maximum Seated Height	Inches
Minimum Seated Height	Inches

## MAXIMUM RATINGS

Peak Plate Voltage	Watts
Heater-Cathode Voltage	
Heater Positive with respect to Cathode	
DC Component	Volts
Total DC and Peak	Volts
Heater Negative with respect to Cathode⊕	
Total DČ and Peak	Volts
Grid-Circuit Resistance	Megohms

#### PHYSICAL DIMENSIONS



#### TERMINAL CONNECTIONS

Pin 1 - Heater

Pin 2 - Grid

HIGH-VOLTAGE REGULATOR SERVICES—DESIGN-MAXIMUM VALUES

Pin 3 - Beam Plate

Pin 4 - Cathode

Pin 5 - Internal Connection - Do Not Use

Pin 6 - Internal Connection - Do Not Use

Pin 7 - Plate

Pin 8 - Internal Connection - Do Not Use


Pin 9 - Internal Connection - Do Not Use

Pin 10 - Beam Plate

Pin 11 - Grid

Pin 12 - Heater

# BASING DIAGRAM



EIA 12GY



# MAXIMUM RATINGS (Cont'd)

Design-Maximum ratings are limiting values of operating and environmental conditions applicable to a bogey electron tube of a specified type as defined by its published data and should not be exceeded under the worst probable conditions.

The tube manufacturer chooses these values to provide acceptable serviceability of the tube, making allowance for the effects of changes in operating conditions due to variations in the characteristics of the tube under consideration.

The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of all other electron devices in the equipment.

## CHARACTERISTICS AND TYPICAL OPERATION

AVERAGE CHARACTERISTICS	
Pulse Plate Voltagea	Volts
Beam Plate Connected to Cathode at Socket	
Negative DC Grid Voltage	Volts
Peak Plate Current	Milliamperes
Amplification Factor	
Transconductance	Micromhos
Plate Resistance, approximate	
Grid Voltage, approximate	
Fb = 3500 Volts   b = 1.0 Milliamperes	Volts


## **NOTES**

- The equipment designer should design the equipment so that heater voltage is centered at the specified bogey value, with heater supply variations restricted to maintain heater voltage within the specified tolerance.
- Heater current of a bogey tube at Ef = 6.3 volts.
- Without external shield.
- For operation in a 525-line, 30-frame television system as described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations", Federal Communications Commission. The duty cycle of the voltage pulse must not exceed 15 percent of one scanning cycle.

The tubes and arrangements disclosed herein may be covered by patents of General Electric Company or others. Neither the disclosure of any information herein nor the sale of tubes by General Electric Company conveys any license under patent claims covering combinations of tubes with other devices or elements. In the absence of an

- Sufficient impedance (220 ohms by-passed with a 0.01 microfarad capacitor is suggested) should be in series with the cathode to limit the cathode current under prolonged heater-cathode short-circuit conditions. This protective impedance will minimize the danger of heater burnout in case of a momentary heater-cathode arc within the tube.
- Larger values of grid-circuit resistance may be used if provisions are made to protect the tube.
- Duty cycle of the pulse must be less than 2.5 percent.
- † Measured with an infrared themometer, Ircon Model 700 BC or equivalent, at an ambient temperature of 40° C.

express written agreement to the contrary, General Electric Company assumes no liability for patent infringement arising out of any use of the tubes with other devices or elements by any purchaser of tubes or others.

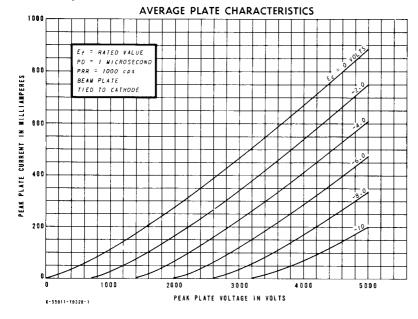

TUBE PRODUCTS DEPARTMENT

GENERAL 🚱 ELECTRIC

Owensboro, Kentucky 42301