

engineering data service

21CBP4 21CBP4A

CHARACTERISTICS

GENERAL DATA	
Focusing Method Electrostatic Deflection Method	
Horizontal	
Persistence Short to Medium Faceplate Gray Filter Glass	
Light Transmittance (approx.)	
ELECTRICAL DATA	
	ax.
MECHANICAL DATA	
Minimum Useful Screen Dimensions	

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)


Anode Voltage												22,000 Volts	do
Grid No. 4 Voltage													
(Focusing Electrode)									-5	50	to	+1100 Volts	dc
Grid No. 2 Voltage .												550 Volts	dç
Grid No. 1 Voltage													
Negative Bias Value												155 Volts	dc
Negative Peak Value												220 Volts	
Positive Bias Value												0 Volts	dc
Positive Peak Value												2 Volts	
Peak Heater-Cathode Vol													
Heater Negative with	ıŘ	est	peci	t to	C	ath	od	e					
During Warm-up P													
15 Seconds												450 Volts	
After Equipment W												200 Volts	
Heater Positive with												200 Volts	


TYPICAL OPERATING CONDITIONS

Anode Voltage					16,000 Volts	dc
Grid No. 4 Voltage .					. $-50 \text{ to } +350 \text{ Volts}$	dc
Grid No. 2 Voltage .					300 Volts	dc
Grid No. 1 Voltage Requ	iired for	Cuto	ff3	-	. –28 to –72 Volts	dc

QUICK REFERENCE DATA

Television Picture Tube
21" Direct Viewed
Rectangular Glass Type
Spherical Faceplate
Gray Filter Glass
Magnetic Deflection
Electrostatic Focus
No Ion Trap
External Conductive Coating
Aluminized Screen





SYLVANIA ELECTRIC PRODUCTS INC.

TELEVISION PICTURE TUBE DIVISION

SENECA FALLS, NEW YORK

Prepared and Released By The TECHNICAL PUBLICATIONS SECTION EMPORIUM, PENNSYLVANIA

> JULY, 1957 PAGE 1 OF 3

SYLVANIA 21CBP4 21CBP4A

PAGE 2

CIRCUIT VALUES										
Grid No. 1 Circuit Resistance						٠		•	•	1.5 Megohms Max

NOTES:

- 1. Heater warm-up time is the time required for the voltage across the heater terminals to increase to 5.0 volts in the JETEC test circuit, with E=25 volts and series R=31.5 ohms.
- 2. External conductive coating must be grounded.
- 3. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

PAGE 3

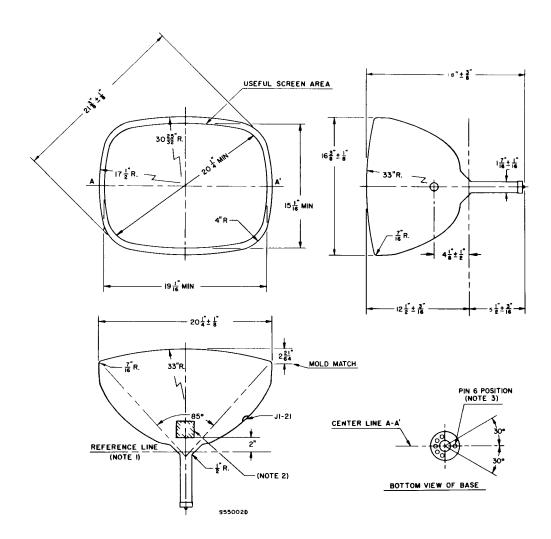


DIAGRAM NOTES:

- 1. Reference line is determined by the plane C-C^I of the reference line gauge (JETEC No. 116) when the gauge is resting on the glass cone.
- 2. Contact area for external conductive coating, 2" x 2", located 90° counterclockwise from anode contact as viewed from base end of tube.
- 3. Anode contact aligns with pin position No. 6 \pm 30 degrees.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.