

MAZDA**11E2****BEAM POWER AMPLIFIER**

Indirectly heated—for Pulse Amplification

11E2**RATING**

Heater Voltage (volts)	V_h	6.3
Heater Current (amps)	I_h	0.9
Maximum Peak Anode Voltage -		
Pulse Rating (volts)	$V_a(pk)max$	12,500
Maximum Screen Voltage (volts)	$V_{g2}(max)$	550
Maximum Peak Anode Current (amps)	$I_a(pk)max$	1.0
Inner μ	$\mu_{g1, g2}$	9.0
Maximum Anode Dissipation (watts)	$W_a(max)$	5.0
Maximum Screen Dissipation (watts)	$W_{g2}(max)$	1.0
Maximum Potential Heater/Cathode (volts DC)	$V_{h-k}(max)$	150

* Taken at $V_a = 200v$; $V_{g2} = 200v$; $I_a = 25mA$.**INTER-ELECTRODE CAPACITANCES**

Anode/Earth (μF)	$C_{a, all}$	7.5
Anode/Control Grid (μF)	$C_{a, g1}$	0.2
Control Grid/Earth (μF)	$C_{g1, all}$	15.5

"Earth" denotes the remaining earthy potential electrodes, heater joined to cathode.

DIMENSIONS

Maximum Overall Length (mm)	86
Maximum Diameter (mm)	32
Maximum Radius over Side Cap (mm)	25
Maximum Seated Height (mm)	73
Approximate Nett Weight (ozs)	1 $\frac{1}{2}$
Approximate Packed Weight (ozs)	4

MOUNTING POSITION - Vertical**NOTE**

This valve is intended for use in break modulators but it can be employed in a series modulation with a standoff voltage of 3,000 volts.


11E2

MAZDA

11E2

BEAM POWER AMPLIFIER

Indirectly heated—for Pulse Amplification

CAP American MiniatureBULB ClearBASE I.O.S.

Viewed from free end of pins.

← Indicates position of side cap.

CONNEXIONS

Pin 1	Blank	-
Pin 2	Heater	h
Pin 3	Blank	-
Pin 4	Screen Grid	g2
Pin 5	Control Grid	g1
Pin 6	Blank	-
Pin 7	Heater	h
Pin 8	Cathode	k
Side Cap	Anode	a

MAZDA


11E2

BEAM POWER AMPLIFIER

Indirectly heated—for Pulse Amplification

11E2

AVERAGE CHARACTERISTIC CURVES

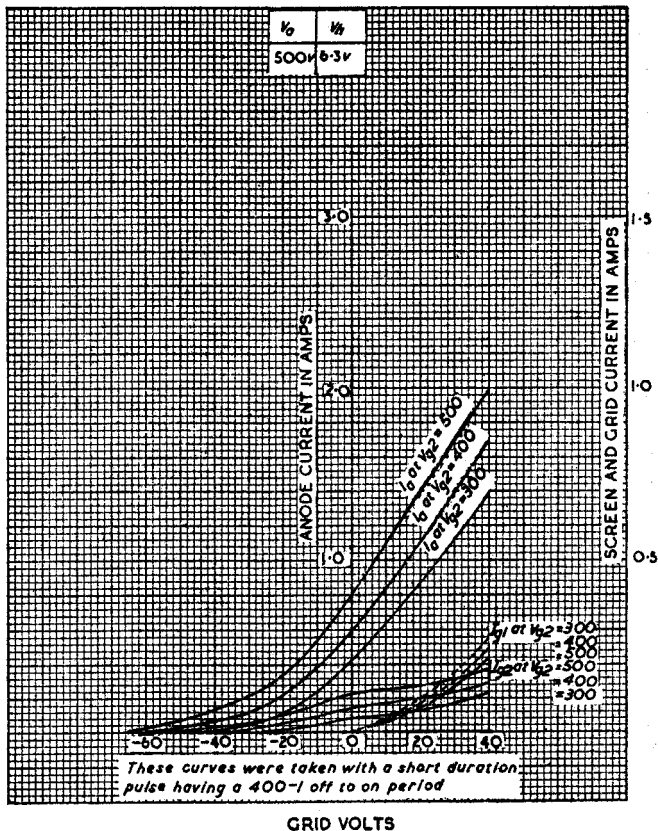

11E2

MAZDA

11E2

BEAM POWER AMPLIFIER

Indirectly heated—for Pulse Amplification

AVERAGE CHARACTERISTIC CURVES

