

MC10H680, MC100H680

4-Bit Differential ECL Bus to TTL Bus Transceiver

The MC10H/100H680 is a dual supply 4-bit differential ECL bus to TTL bus transceiver. It is designed to allow the system designer to no longer be limited in bus speed associated with standard TTL busses. Using a differential ECL Bus will increase the frequency of operation and increase noise immunity.


Both the TTL and the ECL ports are capable of driving a bus. The ECL outputs have the ability to drive $25\ \Omega$, allowing both ends of the bus line to be terminated in the characteristic impedance of $50\ \Omega$. The TTL outputs are specified to source 15 mA and sink 48 mA, allowing the ability to drive highly capacitive loads.

The ECL output levels are V_{OH} approximately equal to -1.0 V and V_{OL} cutoff equal to -2.0 V (V_{TT}). When the ECL ports are disabled both EIOx and EIOxB go to the V_{OL} cutoff level. The ECL input receivers have special circuitry which detects this disabled condition, prevents oscillation, and forces the TTL output to the low state. The noise margin in this disabled state is greater than 600 mV. Multiple ECL V_{CCO} pins are utilized to minimize switching noise.

The TTL ports have standard levels. The TTL input receivers have PNP input devices to significantly reduce loading. Multiple TTL power and ground pins are utilized to minimize switching noise.


The control pins (EDIR and ECEB) of the 10H version is compatible with MECL 10H ECL logic levels. The control pins of the 100H version are compatible with 100K levels.

- Differential ECL Bus ($25\ \Omega$) I/O Ports
- High Drive TTL Bus I/O Ports
- Extra TTL and ECL Power/Ground Pins to Minimize Switching Noise
- Dual Supply
- Direction and Chip Enable Control Pins

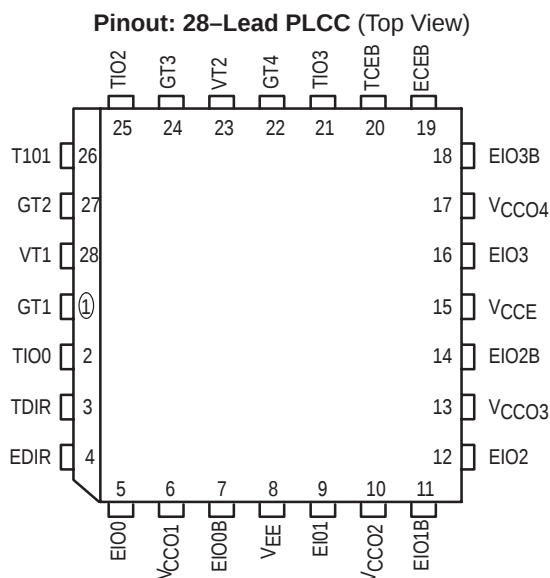


ON Semiconductor

<http://onsemi.com>



**PLCC-28
FN SUFFIX
CASE 776**

MARKING DIAGRAM



A = Assembly Location
WL = Wafer Lot
YY = Year
WW = Work Week

ORDERING INFORMATION

Device	Package	Shipping
MC10H680FN	PLCC-28	37 Units/Rail
MC100H680FN	PLCC-28	37 Units/Rail

MC10H680, MC100H680

PIN DESCRIPTIONS

Pin	Symbol	Function
1	GT1	TTL Ground 1
2	TIO0	TTL I/O Bit 0
3	TDIR	TTL Direction Control
4	EDIR	ECL Direction Control
5	EIO0	ECL I/O Bit 0
6	VCCO1	ECL VCC 1 (0V) – Outputs
7	EIO0B	ECL I/O Bit 0 Bar
8	VEE	ECL Supply (–5.2/–4.5V)
9	EIO1	ECL I/O Bit 1
10	VCCO2	ECL VCC 2 (0V) – Outputs
11	EIO1B	ECL I/O Bit 1 Bar
12	EIO2	ECL I/O Bit 2
13	VCCO3	ECL VCC 3 (0V) – Outputs
14	EIO2B	ECL I/O Bit 2 Bar
15	VCCE	ECL VCC (0V)
16	EIO3	ECL I/O Bit 3
17	VCCO4	ECL VCC 4 (0V) – Outputs
18	EIO3B	ECL I/O Bit 3 Bar
19	ECEB	ECL Chip Enable Bar Control
20	TCEB	TTL Chip Enable Bar Control
21	TIO3	TTL I/O Bit 3
22	GT4	TTL Ground 4
23	VT2	TTL Supply 2 (5V)
24	GT3	TTL Ground 3
25	TIO2	TTL I/O Bit 2
26	TIO1	TTL I/O Bit 1
27	GT2	TTL Ground 2
28	VT1	TTL Supply 1 (5V)

TRUTH TABLE

TDIR — Direction Control TTL Levels
 EDIR — Direction Control ECL Levels
 TCEB — Chip Enable Bar Control TTL Levels
 ECEB — Chip Enable Bar Control ECL Levels
 TIN — TTL Input
 TOUT — TTL Output
 EIN — ECL Input
 EINB — ECL Input Bar
 EOUT — ECL Output
 EOUTB — ECL Output Bar

H — HIGH
 L — LOW
 LC — ECL Low Cutoff (VTT = –2.0 V)
 X — Don't Care
 Z — High Impedance

ECEB	TCEB	EDIR	TDIR	EIN	EINB	EOUT	EOUTB	TIN	TOUT	COMMENTS
H	X	X	X	X	X	LC	LC	X	Z	ECL and TTL Outputs Disabled
X	H	X	X	X	X	LC	LC	X	Z	ECL and TTL Outputs Disabled
L	L	H	X	H	LC			NA	H	ECL to TTL Direction
L	L	H	X	LC	H			NA	L	ECL to TTL Direction
L	L	H	X	LC	LC			NA	L	ECL to TTL Direction (L–L Cond.)
L	L	X	H	H	LC			NA	H	ECL to TTL Direction
L	L	X	H	LC	H			NA	L	ECL to TTL Direction
L	L	X	H	LC	LC			NA	L	ECL to TTL Direction (L–L Cond.)
L	L	L	L	NA	NA	H	LC	H		TTL to ECL Direction
L	L	L	L	NA	NA	LC	H	L		TTL to ECL Direction

MC10H680, MC100H680

ABSOLUTE RATINGS (Do not exceed):

Power Supply Voltage	V_{EE} (ECL)	–8.0 to 0	Vdc
Power Supply Voltage	V_{CCT} (TTL)	–0.5 to +7.0	Vdc
Input Voltage	V_I (ECL) V_I (TTL)	0.0 to V_{EE} –0.5 to +7.0	Vdc
Disabled 3–State Output	V_{out} (TTL)	0.0 to V_{CCT}	Vdc
Output Source Current Continuous	I_{out} (ECL)	100	mAdc
Output Source Current Surge	I_{out} (ECL)	200	mAdc
Storage Temperature	T_{stg}	–65 to 150	°C
Operating Temperature	T_{amb}	0.0 to +75	°C

ECL DC CHARACTERISTICS: $V_{CCT} = +5.0 \text{ V} \pm 10\%$, $V_{EE} = -5.2 \pm 5\%$ (10H Version); $V_{EE} = -4.2 \text{ V}$ to -5.5 V (100H Version)

Test Symbol	Parameter	$T_A = 0^\circ\text{C}$		$T_A = 25^\circ\text{C}$		$T_A = 75^\circ\text{C}$		Unit	Condition
		Min	Max	Min	Max	Min	Max		
I_{EE}	Supply Current/ECL		–110		–110		–110	mA	
I_{INH}	Input HIGH Current		225		145		145	μA	
I_{INL}	Input LOW Current	0.5		0.5		0.3		μA	
V_{OH} V_{OL}	Output HIGH Voltage Output LOW Voltage	–1100 –2.1	–840 –2.03	–1100 –2.1	–810 –2.03	–1100 –2.1	–735 –2.03	mV V	25 Ω to –2.1 V

CONTROL INPUTS ONLY

10H ECL DC CHARACTERISTICS: $V_{CCT} = +5.0 \pm 10\%$, $V_{EE} = -5.2 \pm 5\%$

Test Symbol	Parameter	$T_A = 0^\circ\text{C}$		$T_A = 25^\circ\text{C}$		$T_A = 75^\circ\text{C}$		Unit	Condition
		Min	Max	Min	Max	Min	Max		
V_{IH} V_{IL}	Input HIGH Voltage Input LOW Voltage	–1170 –1950	–840 –1480	–1130 –1950	–810 –1480	–1070 –1950	–735 –1450	mV	

CONTROL INPUTS ONLY

100H ECL DC CHARACTERISTICS: $V_{CCT} = +5.0 \pm 10\%$, $V_{EE} = -4.2 \text{ V}$ to -5.5 V

Test Symbol	Parameter	$T_A = 0^\circ\text{C}$		$T_A = 25^\circ\text{C}$		$T_A = 75^\circ\text{C}$		Unit	Condition
		Min	Max	Min	Max	Min	Max		
V_{IH} V_{IL}	Input HIGH Voltage Input LOW Voltage	–1165 –1810	–880 –1475	–1165 –1810	–880 –1475	–1165 –1810	–880 –1475	mV	

MC10H680, MC100H680

TTL DC CHARACTERISTICS: $V_{CCT} = +5.0\text{ V} \pm 10\%$, $V_{EE} = -5.2 \pm 5\%$ (10H Version); $V_{EE} = -4.2\text{ V}$ to -5.5 V (100H Version)

Test Symbol	Parameter	$T_A = 0^\circ\text{C}$		$T_A = 25^\circ\text{C}$		$T_A = 75^\circ\text{C}$		Unit	Condition
		Min	Max	Min	Max	Min	Max		
V_{IH} V_{IL}	Standard Input Standard Input	2.0	0.8	2.0	0.8	2.0	0.8	Vdc	
V_{IK}	Input Clamp		-1.2		-1.2		-1.2	Vdc	$I_{IN} = -18\text{ mA}$
V_{OH}	Output HIGH Voltage Output HIGH Voltage	2.5 2.0		2.5 2.0		2.5 2.0		V	$I_{OH} = -3.0\text{ mA}$ $I_{OH} = -15\text{ mA}$
V_{OL}	Output LOW Voltage		0.55		0.55		0.55	V	$I_{OL} = 48\text{ mA}$
I_{IH}^*	TTL (Input HIGH) TTL (Input HIGH)		20 100		20 100		20 100	μA	$V_{in} = 2.7\text{ V}$ $V_{in} = 7.0\text{ V}$
I_{IL}^*	TTL (Input LOW)		-0.6		-0.6		-0.6	mA	$V_{in} = 0.5\text{ V}$
I_{CCL}	Supply Current		75		75		75	mA	
I_{CCH}	Supply Current		70		70		70	mA	
I_{CCZ}	Supply Current		70		70		70	mA	
I_{OS}	Output Short Circuit Current	-100	-225	-100	-225	-100	-225	mA	$V_{OUT} = 0\text{ V}$

* NOTE: TTL Control Inputs only

TTL I/O DC CHARACTERISTICS ONLY

Test Symbol	Parameter	$T_A = 0^\circ\text{C}$		$T_A = 25^\circ\text{C}$		$T_A = 75^\circ\text{C}$		Unit	Condition
		Min	Max	Min	Max	Min	Max		
I_{IH}/I_{OZH} I_{IL}/I_{OZL}	Output Disable Current		70 200		70 200		70 200	μA	$V_{OUT} = 2.7\text{ V}$ $V_{OUT} = 0.5\text{ V}$

ECL TO TTL DIRECTION / AC TEST

Test Symbol	Parameter	Waveforms	$T_A = 0^\circ\text{C}$		$T_A = 25^\circ\text{C}$		$T_A = 75^\circ\text{C}$		Unit	Condition
			Min	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay to Output	2, 4	2.7	4.8	2.7	4.8	2.7	4.8	ns	$C_L = 50\text{ pF}$
t_{pZH} t_{pZL}	ECEB to Output Enable Time	2, 5, 6	3.5 3.5	6.5 6.0	3.5 3.5	6.5 6.0	3.7 3.7	6.7 6.4	ns	$C_L = 50\text{ pF}$
t_{pHZ} t_{pLZ}	ECEB to Output Disable Time	2, 5, 6	3.5 3.5	8.6 6.5	3.5 3.5	8.6 6.5	3.7 3.7	8.8 7.3	ns	$C_L = 50\text{ pF}$
t_{pZH} t_{pZL}	TCEB to Output Enable Time	2, 5, 6	5.7 5.4	7.7 6.9	5.7 5.4	7.7 6.9	5.9 5.9	7.9 7.4	ns	$C_L = 50\text{ pF}$
t_{pHZ} t_{pLZ}	TCEB to Output Disable Time	2, 5, 6	4.0 4.0	8.5 5.8	4.1 4.2	8.4 6.0	4.2 4.7	8.3 6.5	ns	$C_L = 50\text{ pF}$
t_r/t_f	1.0 to 2.0 Vdc	3	0.4	1.5	0.4	1.5	0.4	1.5	ns	$C_L = 50\text{ pF}$


TTL TO ECL DIRECTION / AC TEST

Test Symbol	Parameter	Waveforms	$T_A = 0^\circ\text{C}$		$T_A = 25^\circ\text{C}$		$T_A = 75^\circ\text{C}$		Unit	Condition
			Min	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay to Output	1, 4	1.8	4.6	1.8	4.6	2.0	4.9	ns	25 Ω to -2.0 V
t_{PLH} t_{PHL}	ECEB to Output	1, 4	2.9	5.1	3.0	5.2	3.4	5.7	ns	25 Ω to -2.0 V
t_{PLH} t_{PHL}	TCEB to Output	1, 4	3.4	6.3	3.5	6.6	3.8	7.4	ns	25 Ω to -2.0 V
t_r/t_f	Output Rise/Fall Time 20%–80%	1, 3	1.0	3.4	1.0	3.4	1.0	3.4	ns	25 Ω to -2.0 V

MC10H680, MC100H680

BLOCK DIAGRAM

CONTROL INPUTS

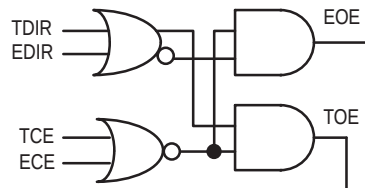

TTL I/O

TIO0

V_{CCT1}

GND2

TIO1


GND3

TIO2

V_{CCT2}

GND4

TIO3

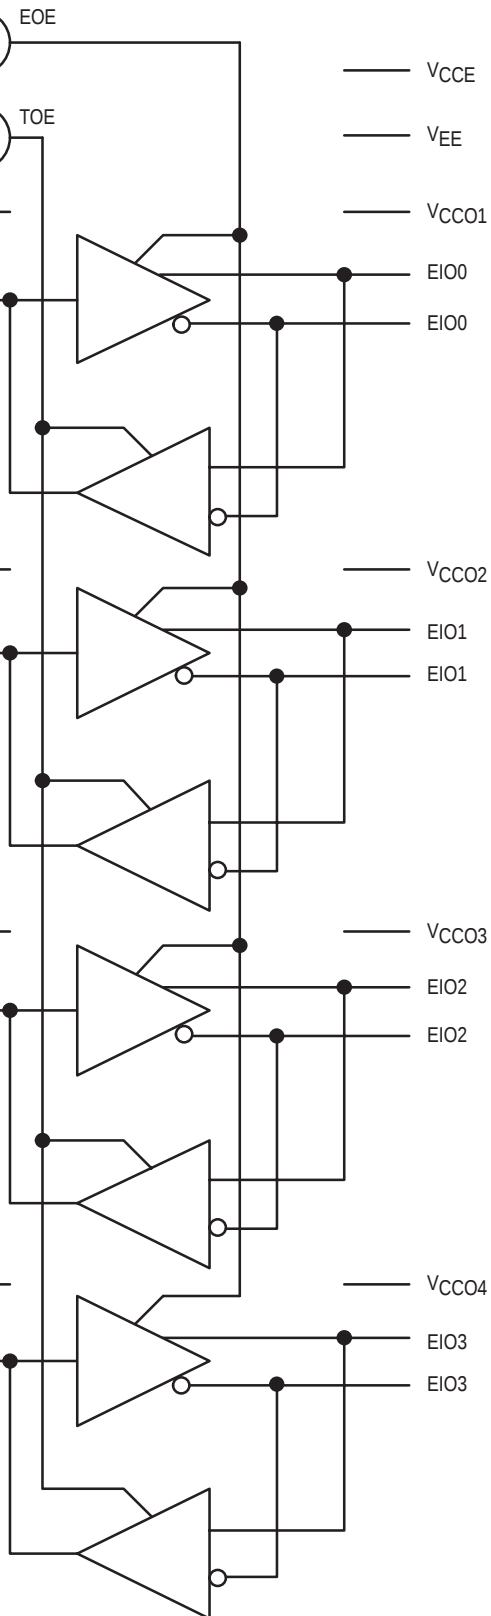

V_{CCE}

V_{EE}

V_{CC01}

EIO0

EIO0

V_{CC02}

EIO1

EIO1

V_{CC03}

EIO2

EIO2

V_{CC04}

EIO3

EIO3

ECL I/O

MC10H680, MC100H680

SWITCHING CIRCUIT AND WAVEFORMS

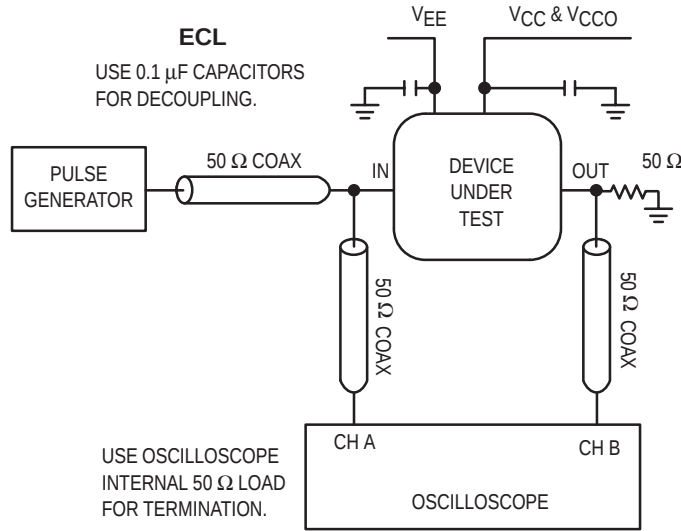


Figure 1. Switching Circuit ECL

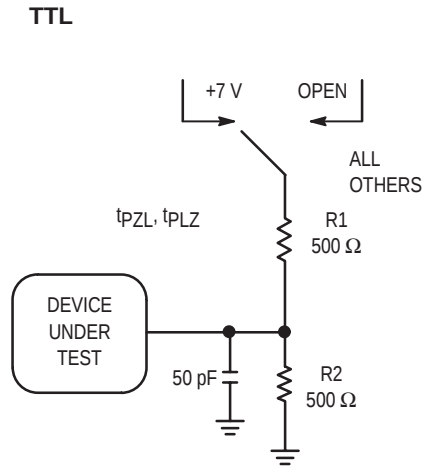


Figure 2.

ECL/TTL



Figure 3. WAVEFORMS: Rise and Fall Times

ECL/TTL

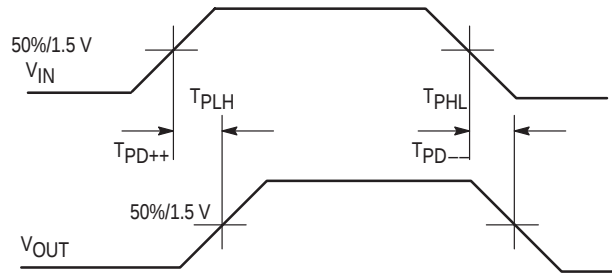


Figure 4. Propagation Delay — Single Ended

TTL

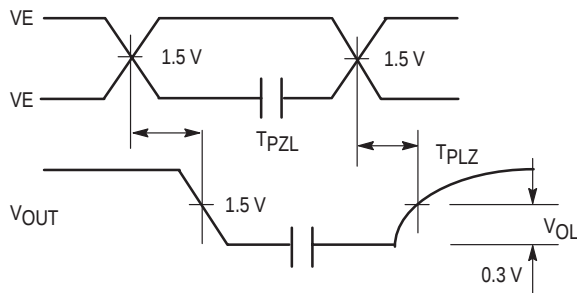


Figure 5. 3-State Output Low Enable and Disable Times

TTL



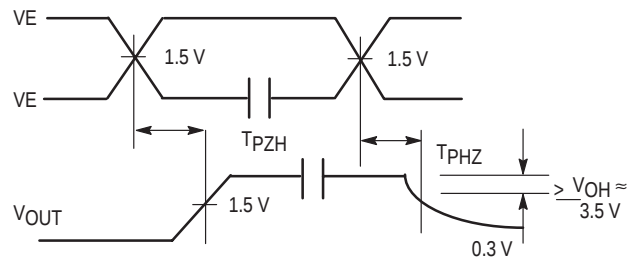


Figure 6. 3-State Output High Enable and Disable Times


MC10H680, MC100H680

PACKAGE DIMENSIONS


PLCC-28
FN SUFFIX
PLASTIC PLCC PACKAGE
CASE 776-02
ISSUE D

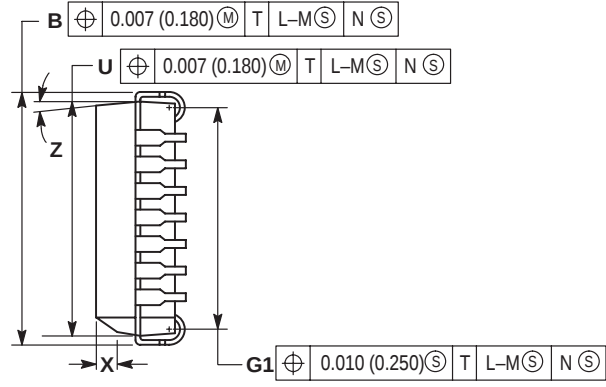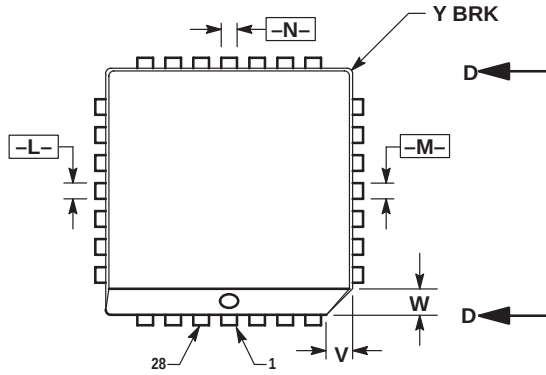

VIEW D-D

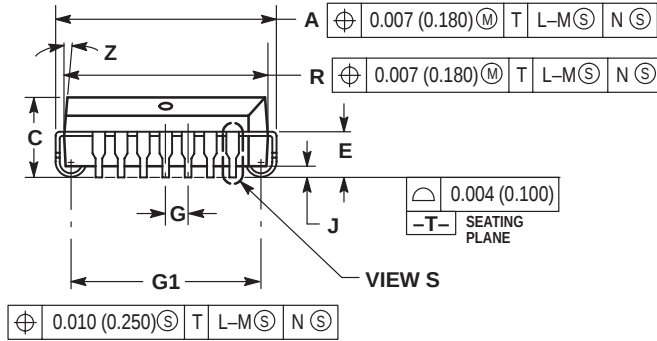

VIEW S

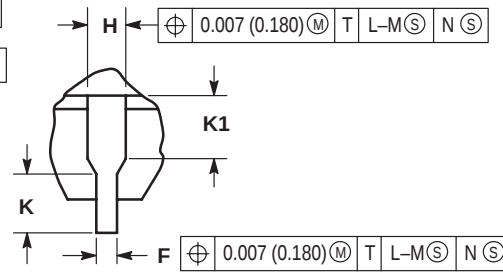

VIEW S

NOTES:

- DATUMS -L-, -M-, AND -N- DETERMINED WHERE TOP OF LEAD SHOULDER EXITS PLASTIC BODY AT MOLD PARTING LINE.
- DIMENSION G1, TRUE POSITION TO BE MEASURED AT DATUM -T-, SEATING PLANE.
- DIMENSIONS R AND U DO NOT INCLUDE MOLD FLASH. ALLOWABLE MOLD FLASH IS 0.010 (0.250) PER SIDE.
- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- CONTROLLING DIMENSION: INCH.
- THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM BY UP TO 0.012 (0.300). DIMENSIONS R AND U ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.
- DIMENSION H DOES NOT INCLUDE DAMBAR PROTRUSION OR INTRUSION. THE DAMBAR PROTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE GREATER THAN 0.037 (0.940). THE DAMBAR INTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE SMALLER THAN 0.025 (0.635).

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.485	0.495	12.32	12.57
B	0.485	0.495	12.32	12.57
C	0.165	0.180	4.20	4.57
E	0.090	0.110	2.29	2.79
F	0.013	0.019	0.33	0.48
G	0.050 BSC		1.27 BSC	
H	0.026	0.032	0.66	0.81
J	0.020	—	0.51	—
K	0.025	—	0.64	—
R	0.450	0.456	11.43	11.58
U	0.450	0.456	11.43	11.58
V	0.042	0.048	1.07	1.21
W	0.042	0.048	1.07	1.21
X	0.042	0.056	1.07	1.42
Y	—	0.020	—	0.50
Z	2°	10°	2°	10°
G1	0.410	0.430	10.42	10.92
K1	0.040	—	1.02	—

MC10H680, MC100H680

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

PUBLICATION ORDERING INFORMATION

North America Literature Fulfillment:

Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: ONlit@hibbertco.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

EUROPE: LDC for ON Semiconductor – European Support

German Phone: (+1) 303-308-7140 (M–F 2:30pm to 5:00pm Munich Time)
Email: ONlit-german@hibbertco.com
French Phone: (+1) 303-308-7141 (M–F 2:30pm to 5:00pm Toulouse Time)
Email: ONlit-french@hibbertco.com
English Phone: (+1) 303-308-7142 (M–F 1:30pm to 5:00pm UK Time)
Email: ONlit@hibbertco.com

ASIA/PACIFIC: LDC for ON Semiconductor – Asia Support

Phone: 303-675-2121 (Tue–Fri 9:00am to 1:00pm, Hong Kong Time)
Toll Free from Hong Kong 800-4422-3781
Email: ONlit-asia@hibbertco.com

JAPAN: ON Semiconductor, Japan Customer Focus Center

4-32-1 Nishi-Gotanda, Shinagawa-ku, Tokyo, Japan 141-8549
Phone: 81-3-5740-2745
Email: r14525@onsemi.com

Fax Response Line: 303-675-2167
800-344-3810 Toll Free USA/Canada

ON Semiconductor Website: <http://onsemi.com>

For additional information, please contact your local Sales Representative.