



133.30 ~137. 29MHz PB-1757 (PLL UNIT) PB-1765 (VCO UNIT) Q302 3SK40M Q303 2SC535A **Downloaded by** □ Q301 2SK19GR ** 7.67 (7.37) T301 **Amateur Radio Directory** OV (0.19V) (5.5 V (0.04V) C314 100 P C310 (0.28V) C32 C305 7P www.hamdirectory.info 0.44 238 C395 0.0017 L310 4mH Q312 Q310 L311 IMH Q311 2SC373 L312 220µH R353 22K R354 100 Q309 TC5081P Q313°--0.0/ R360 30 ₹ (1) (2) (3) (4) (5) (6) (9) (9) 2SC372Y T302 X307 10.240 57V 56 C369 10P 55 V R350 22K 51/2 TPIO R349 (6)μPD857C Q308 Q307 Q306 C351 **=** 0.047 R376 47K L305 RB301 100K×11 3 3 3 3 2SC372Y 2SC372Y J304)@@@@@@**@** P304 J305 2SKI9GRx2 2SC372Y Q402 2SC372Y (0.48V) T404 T403_ P305 X401 7 0.07 1.7 V (0.28 V) L401 IMH

 $10.7\,\mathrm{MHz}$

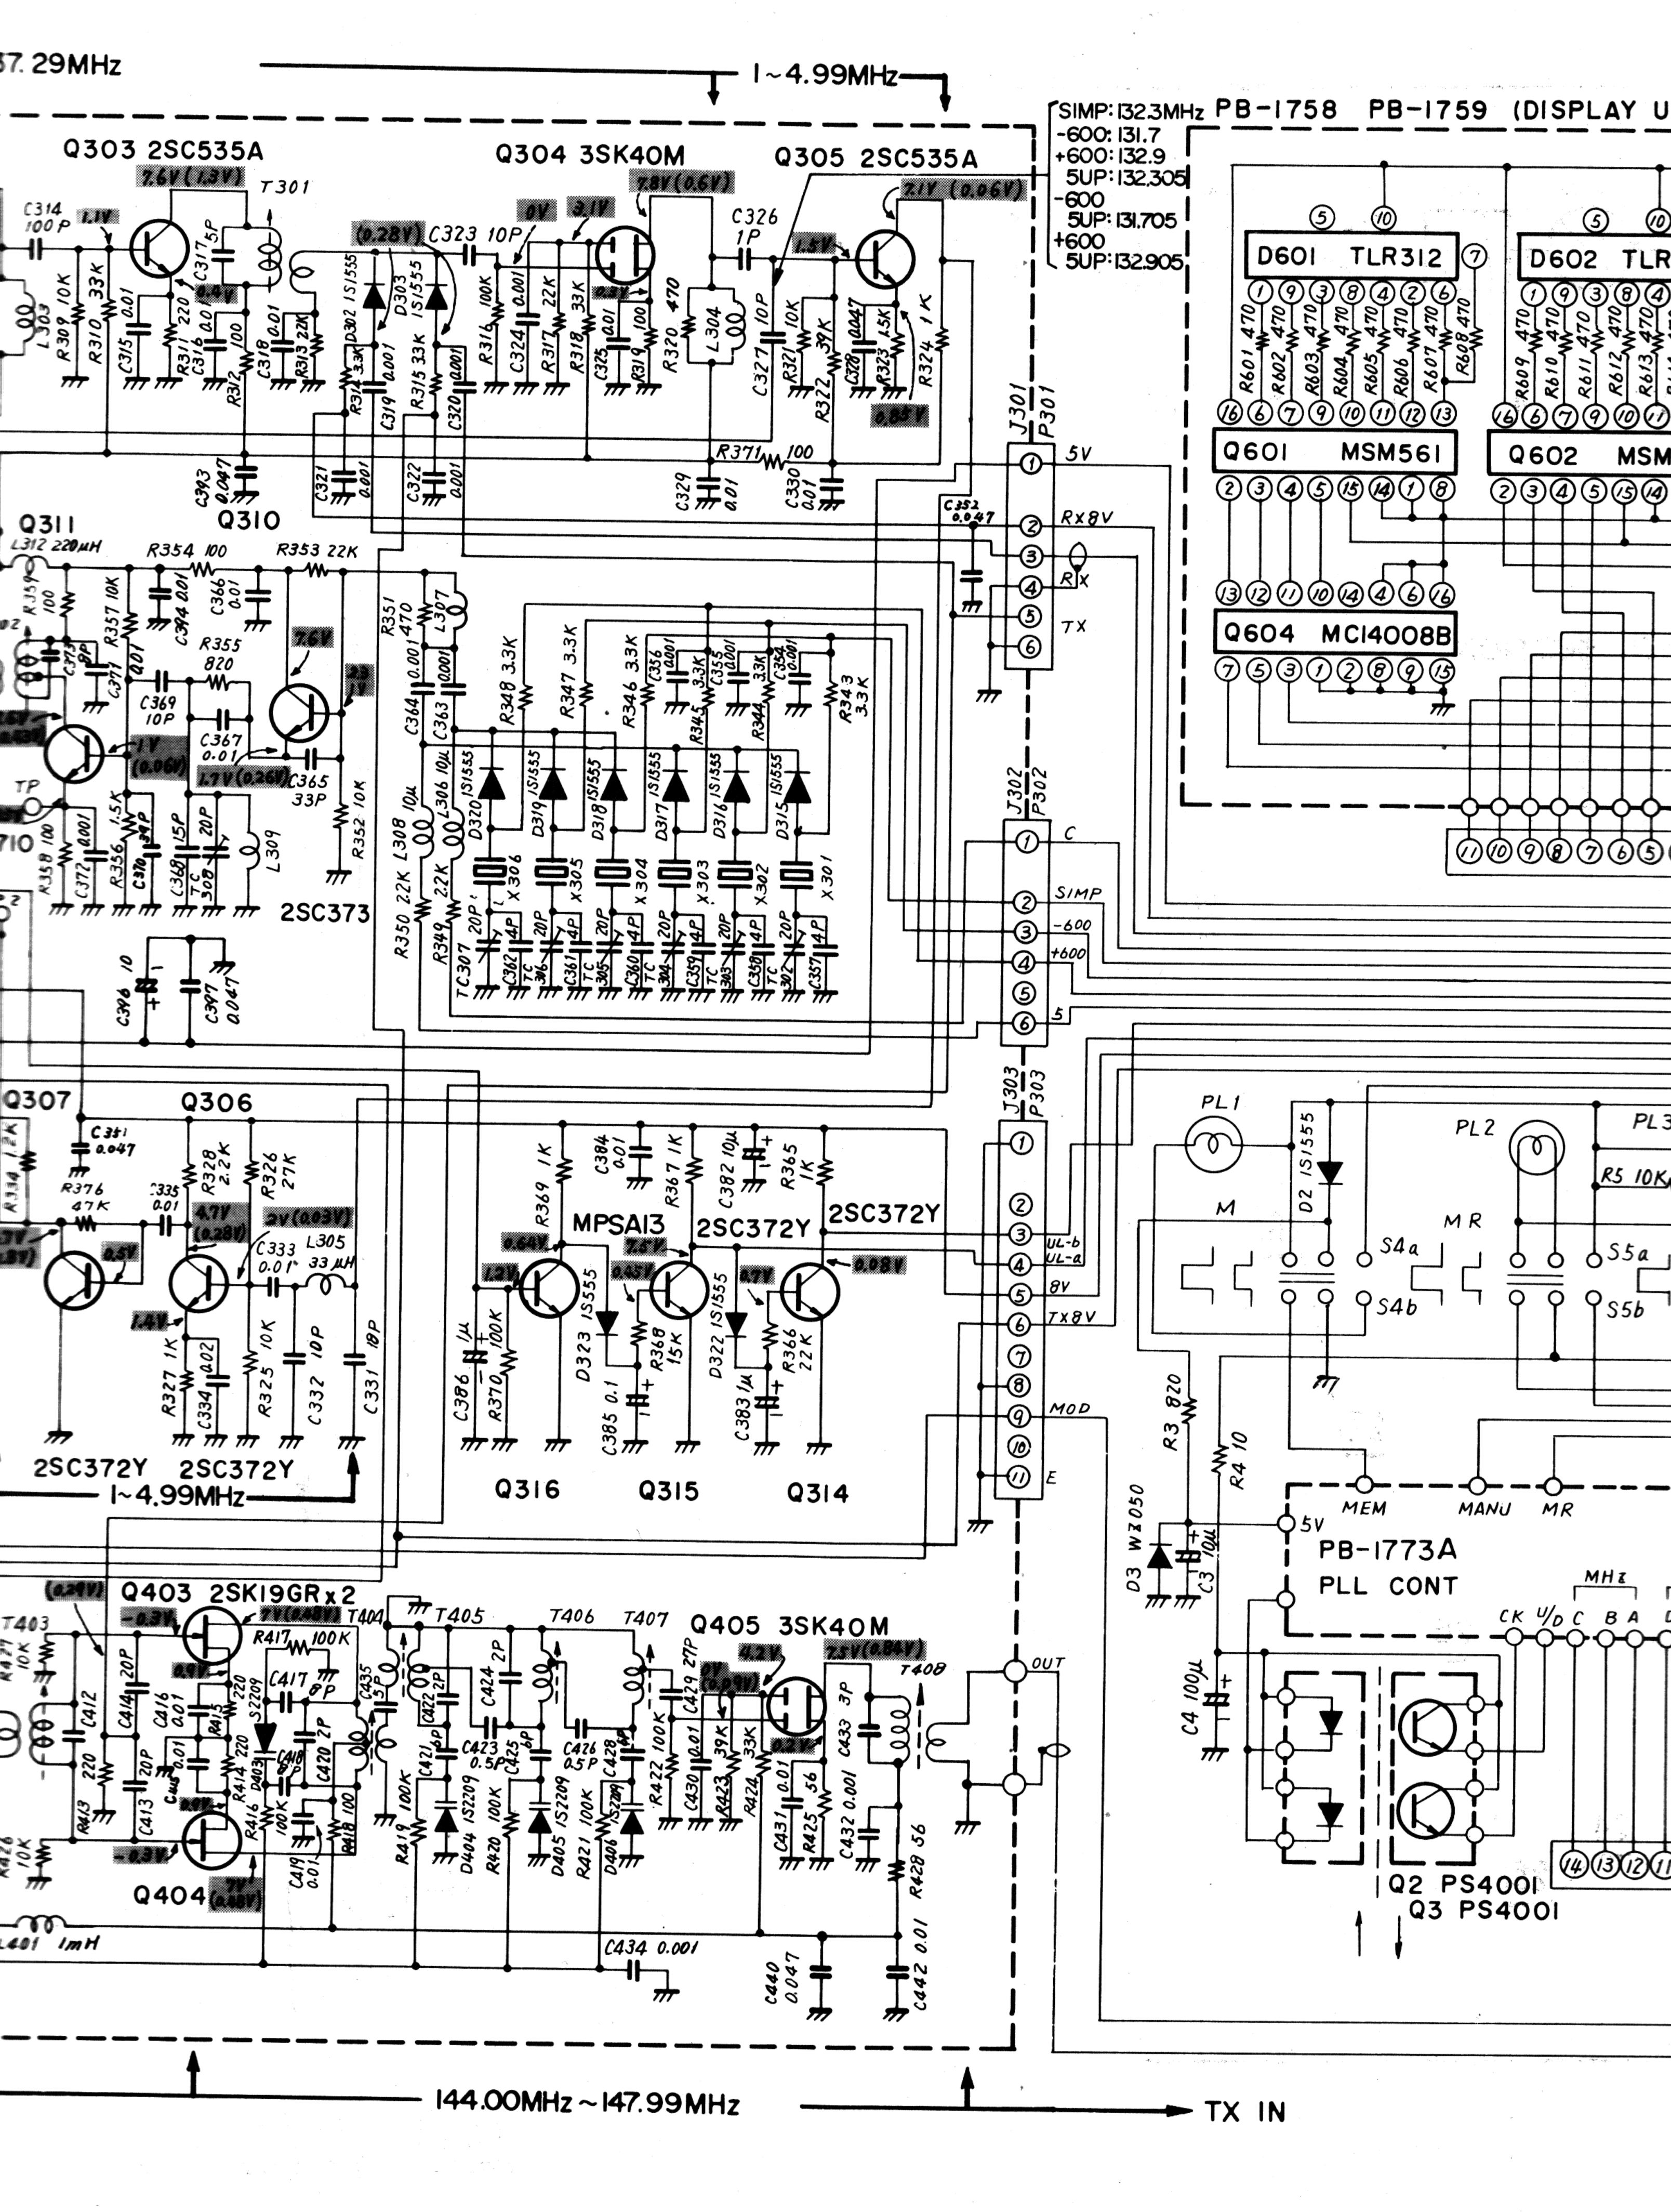

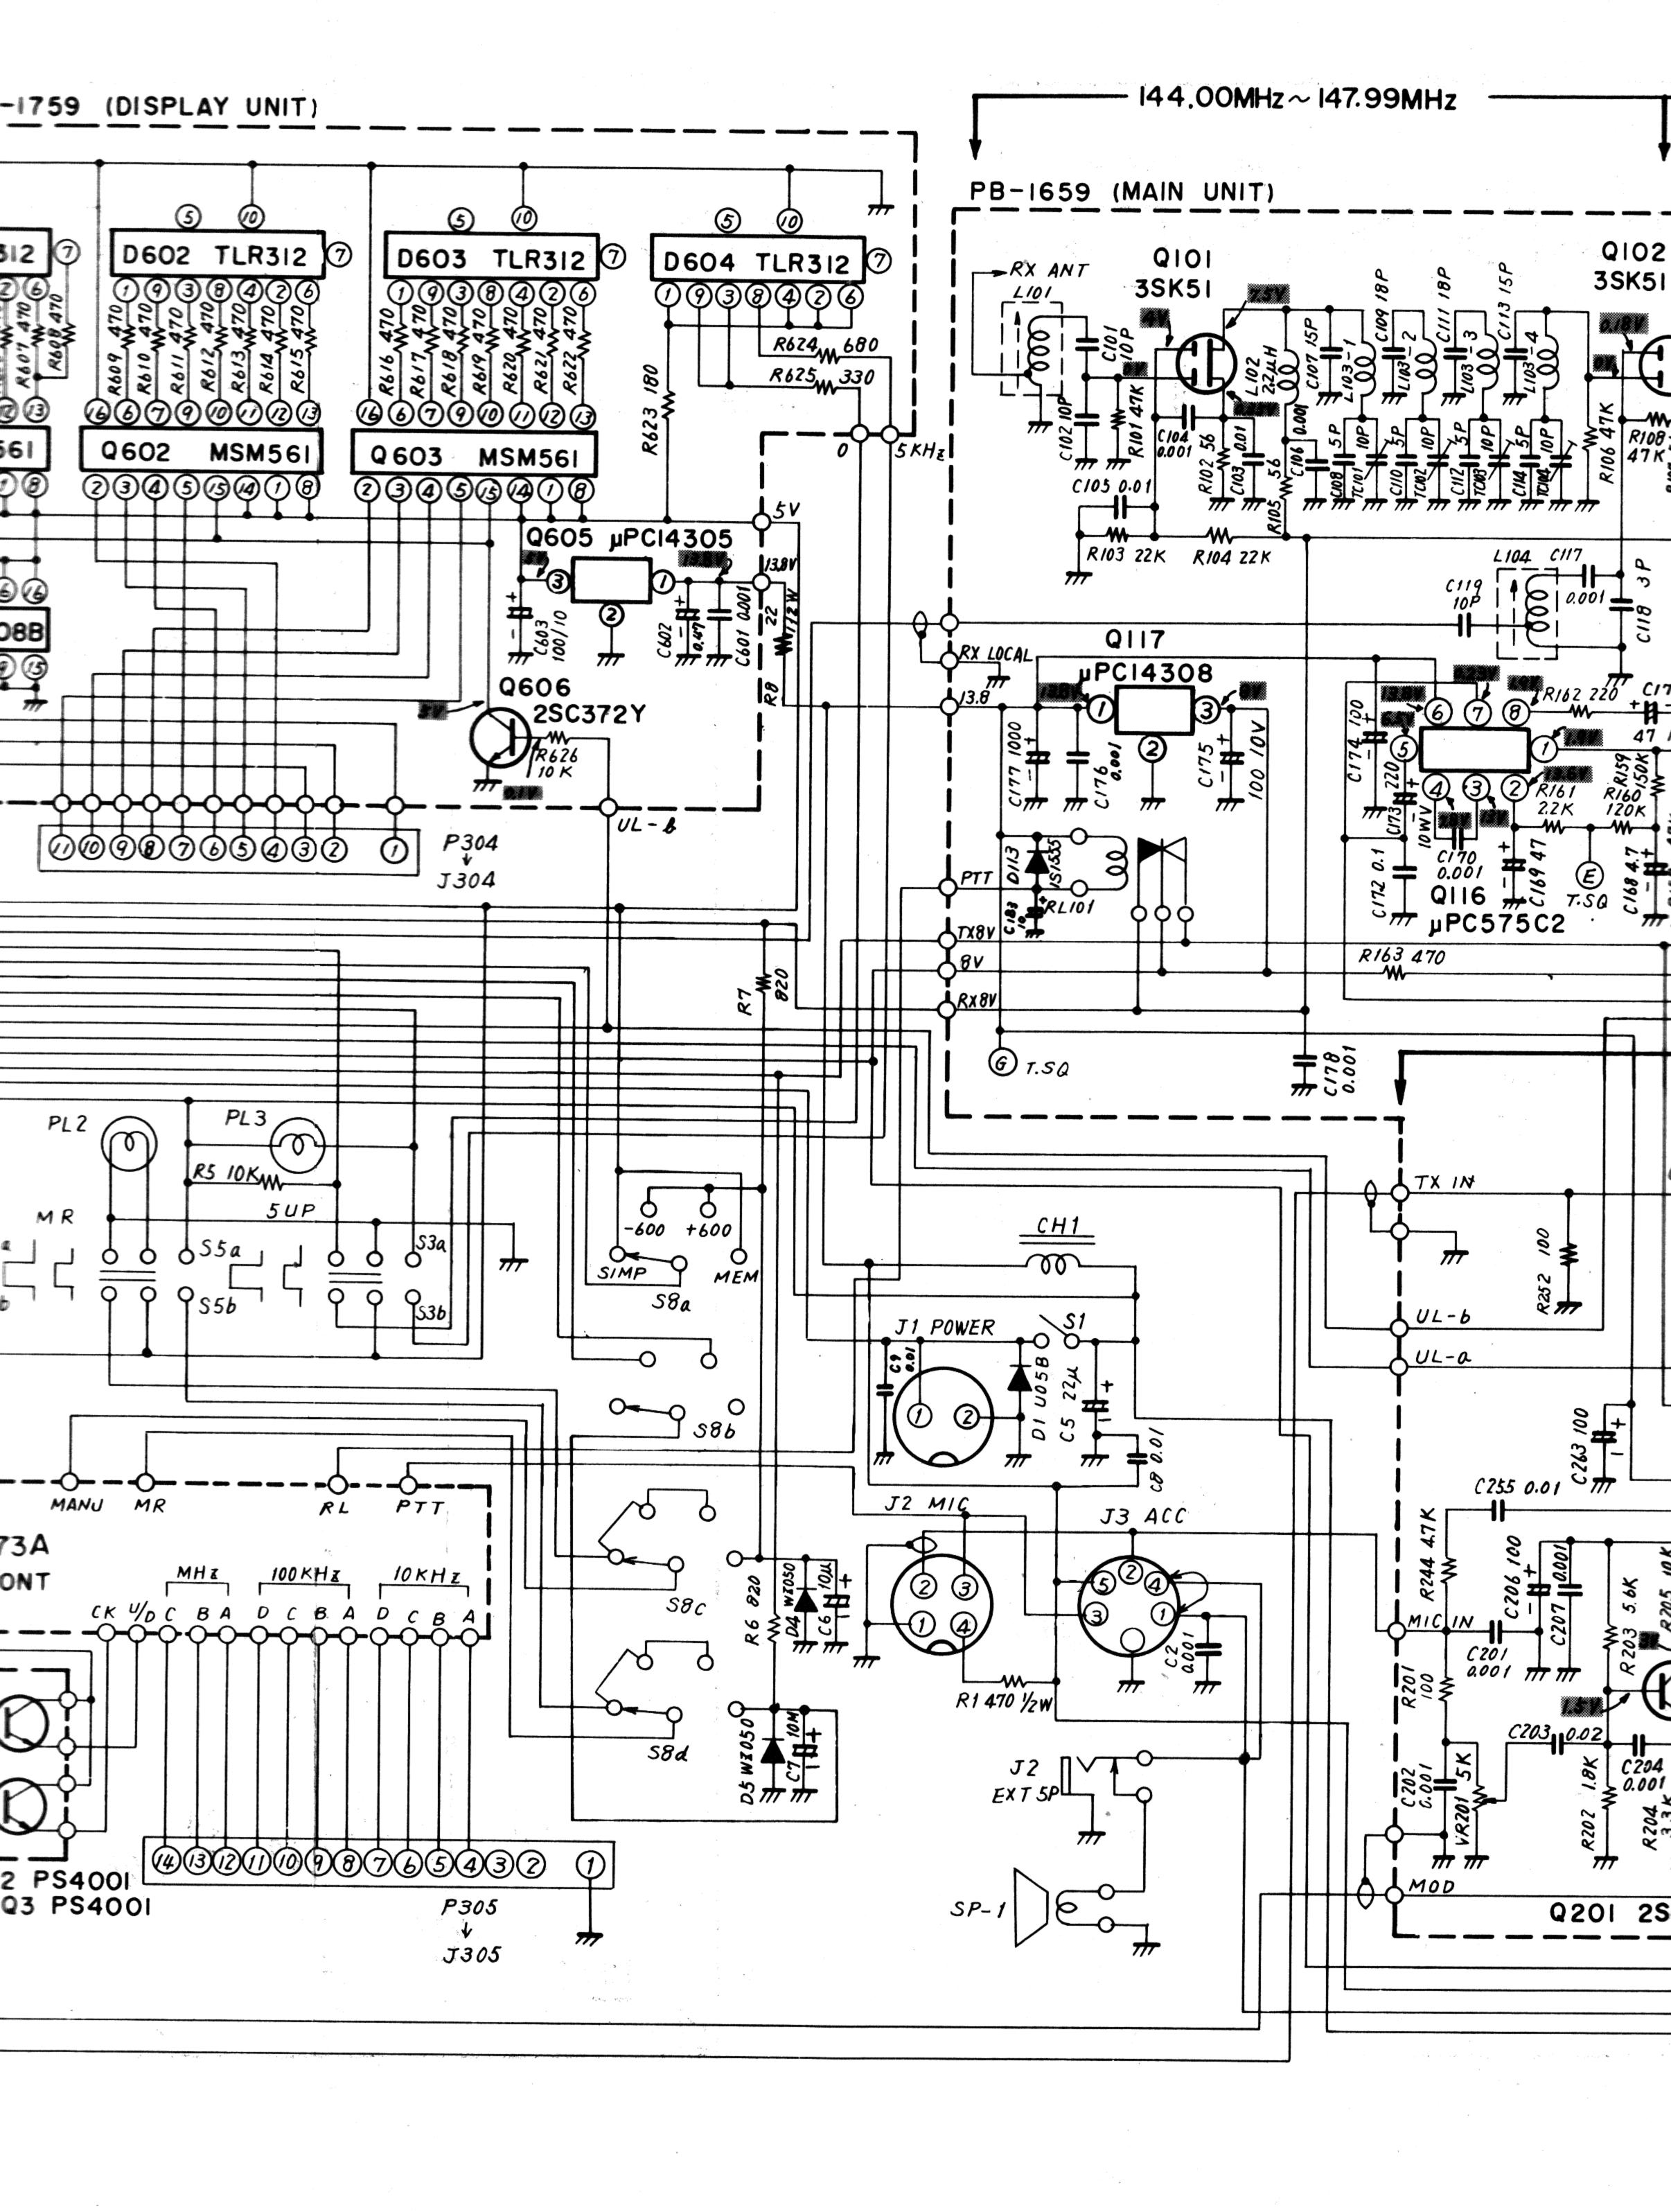

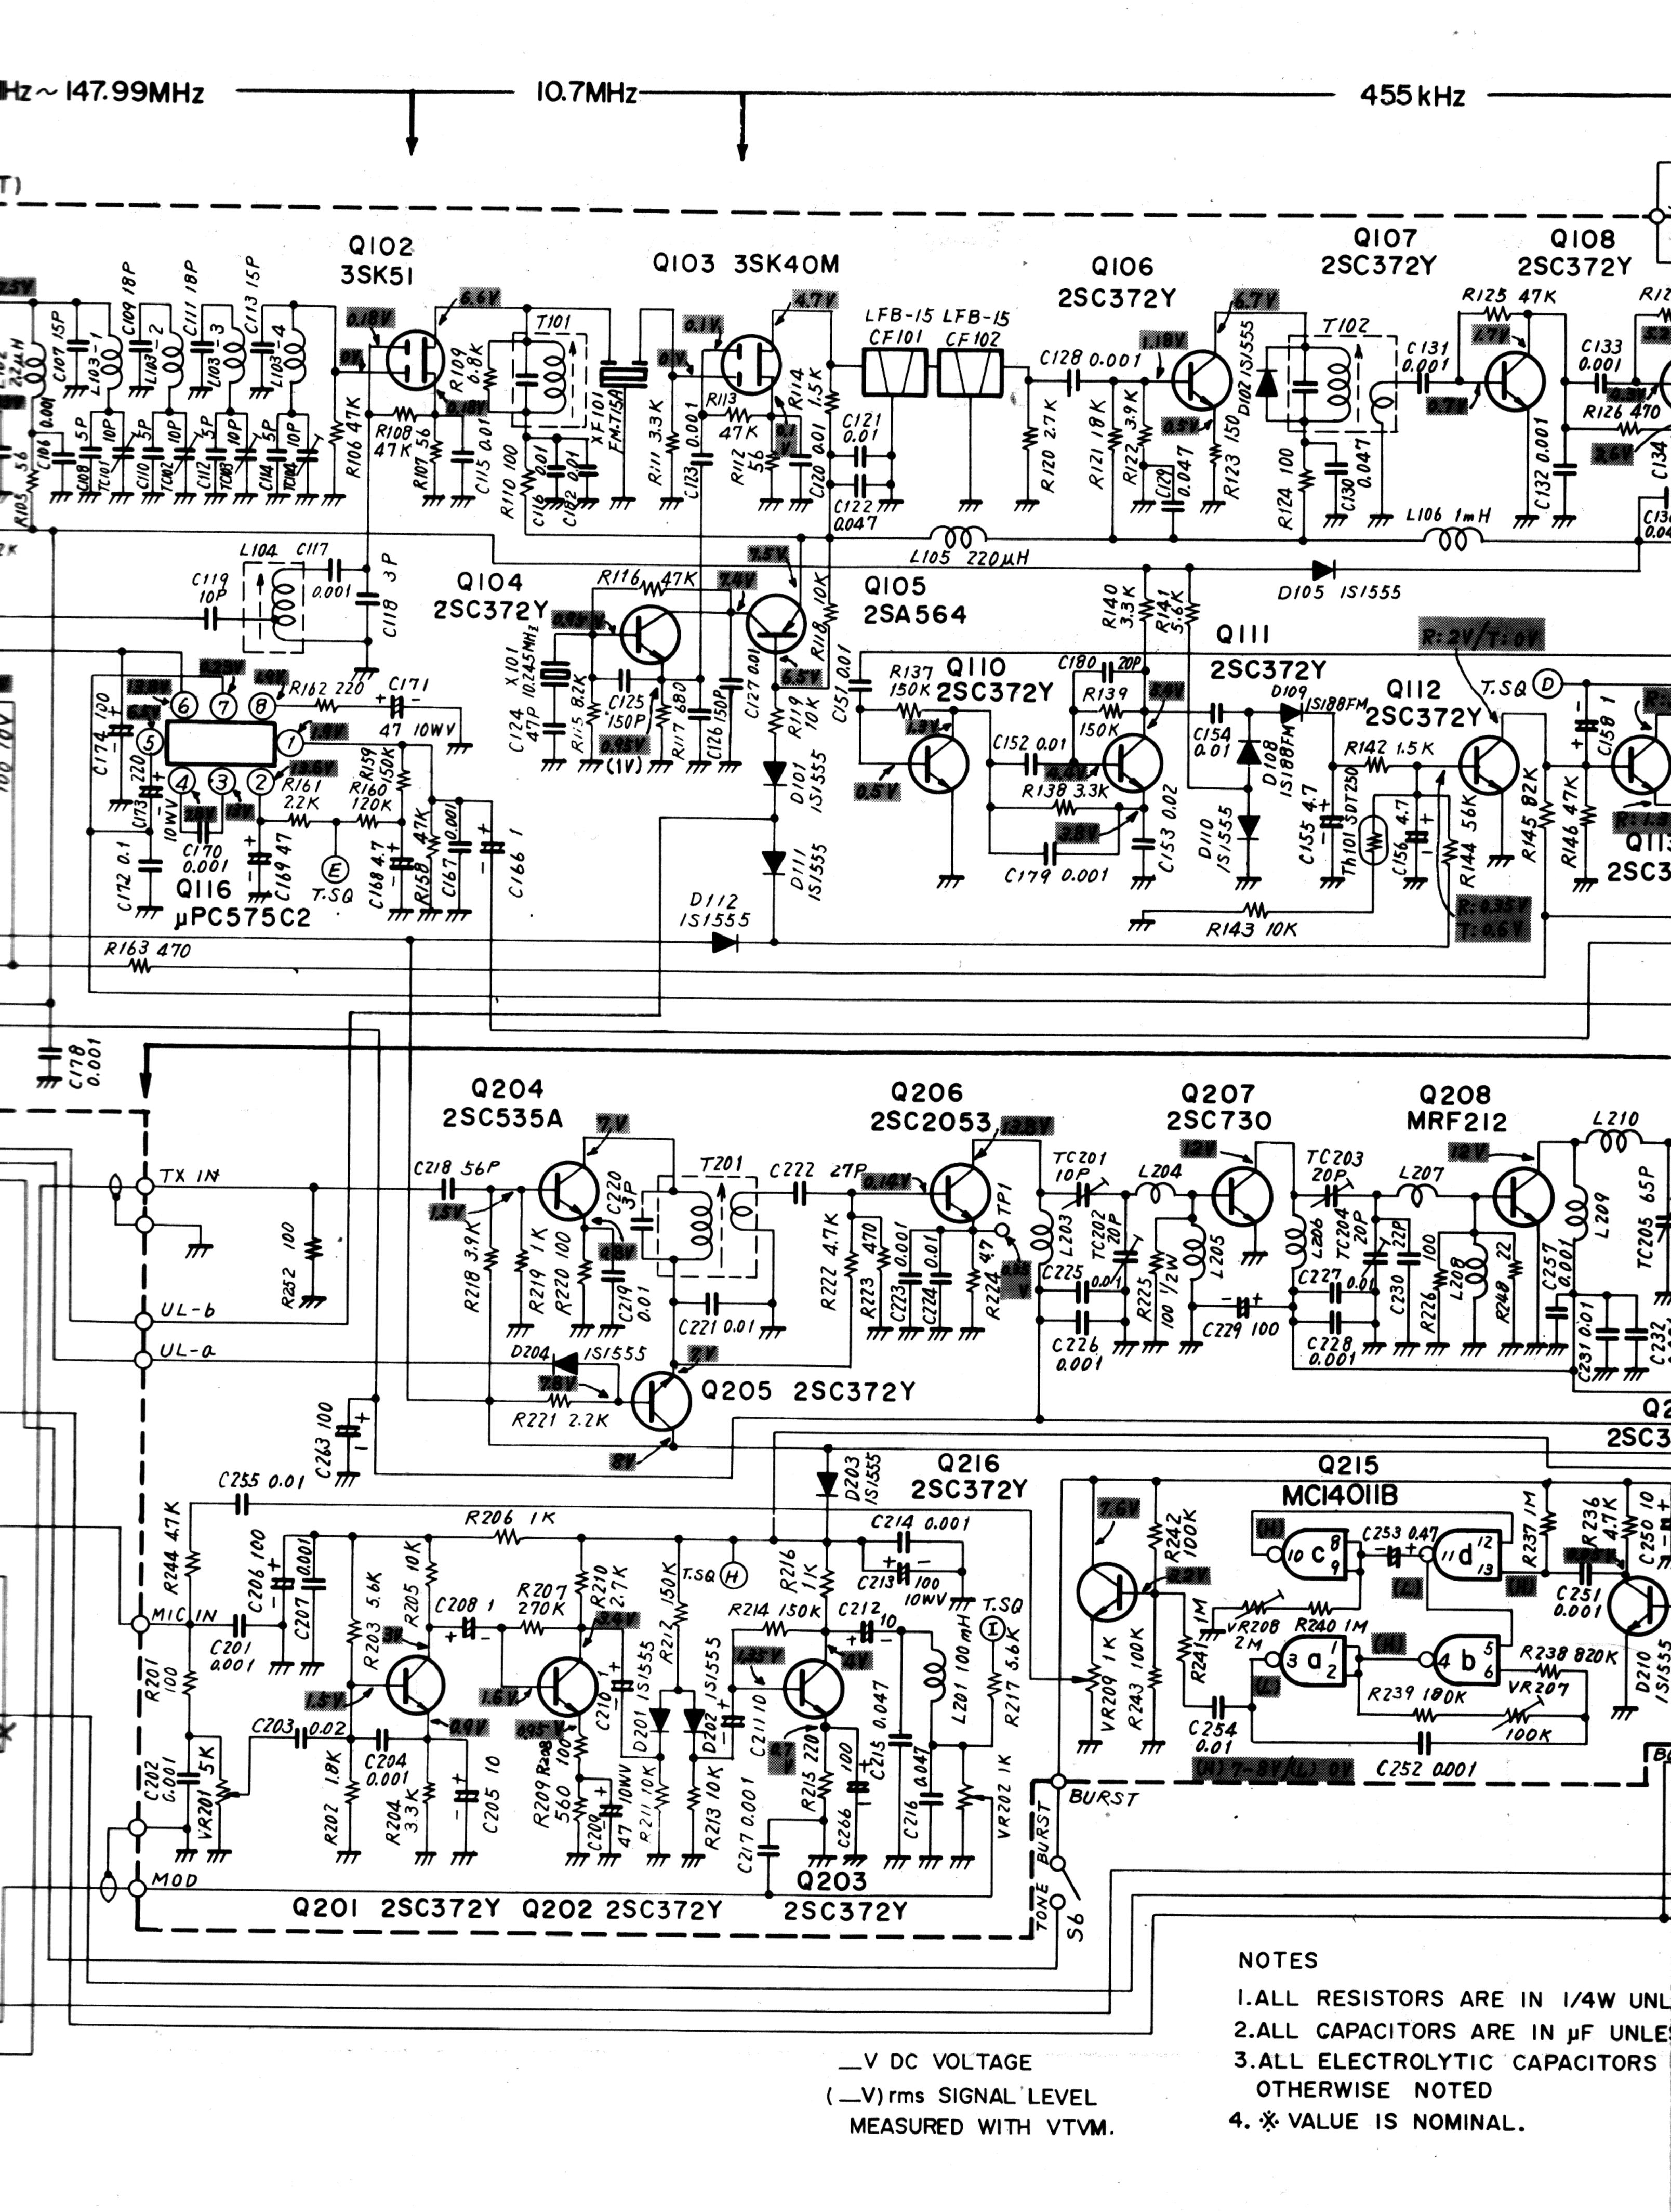

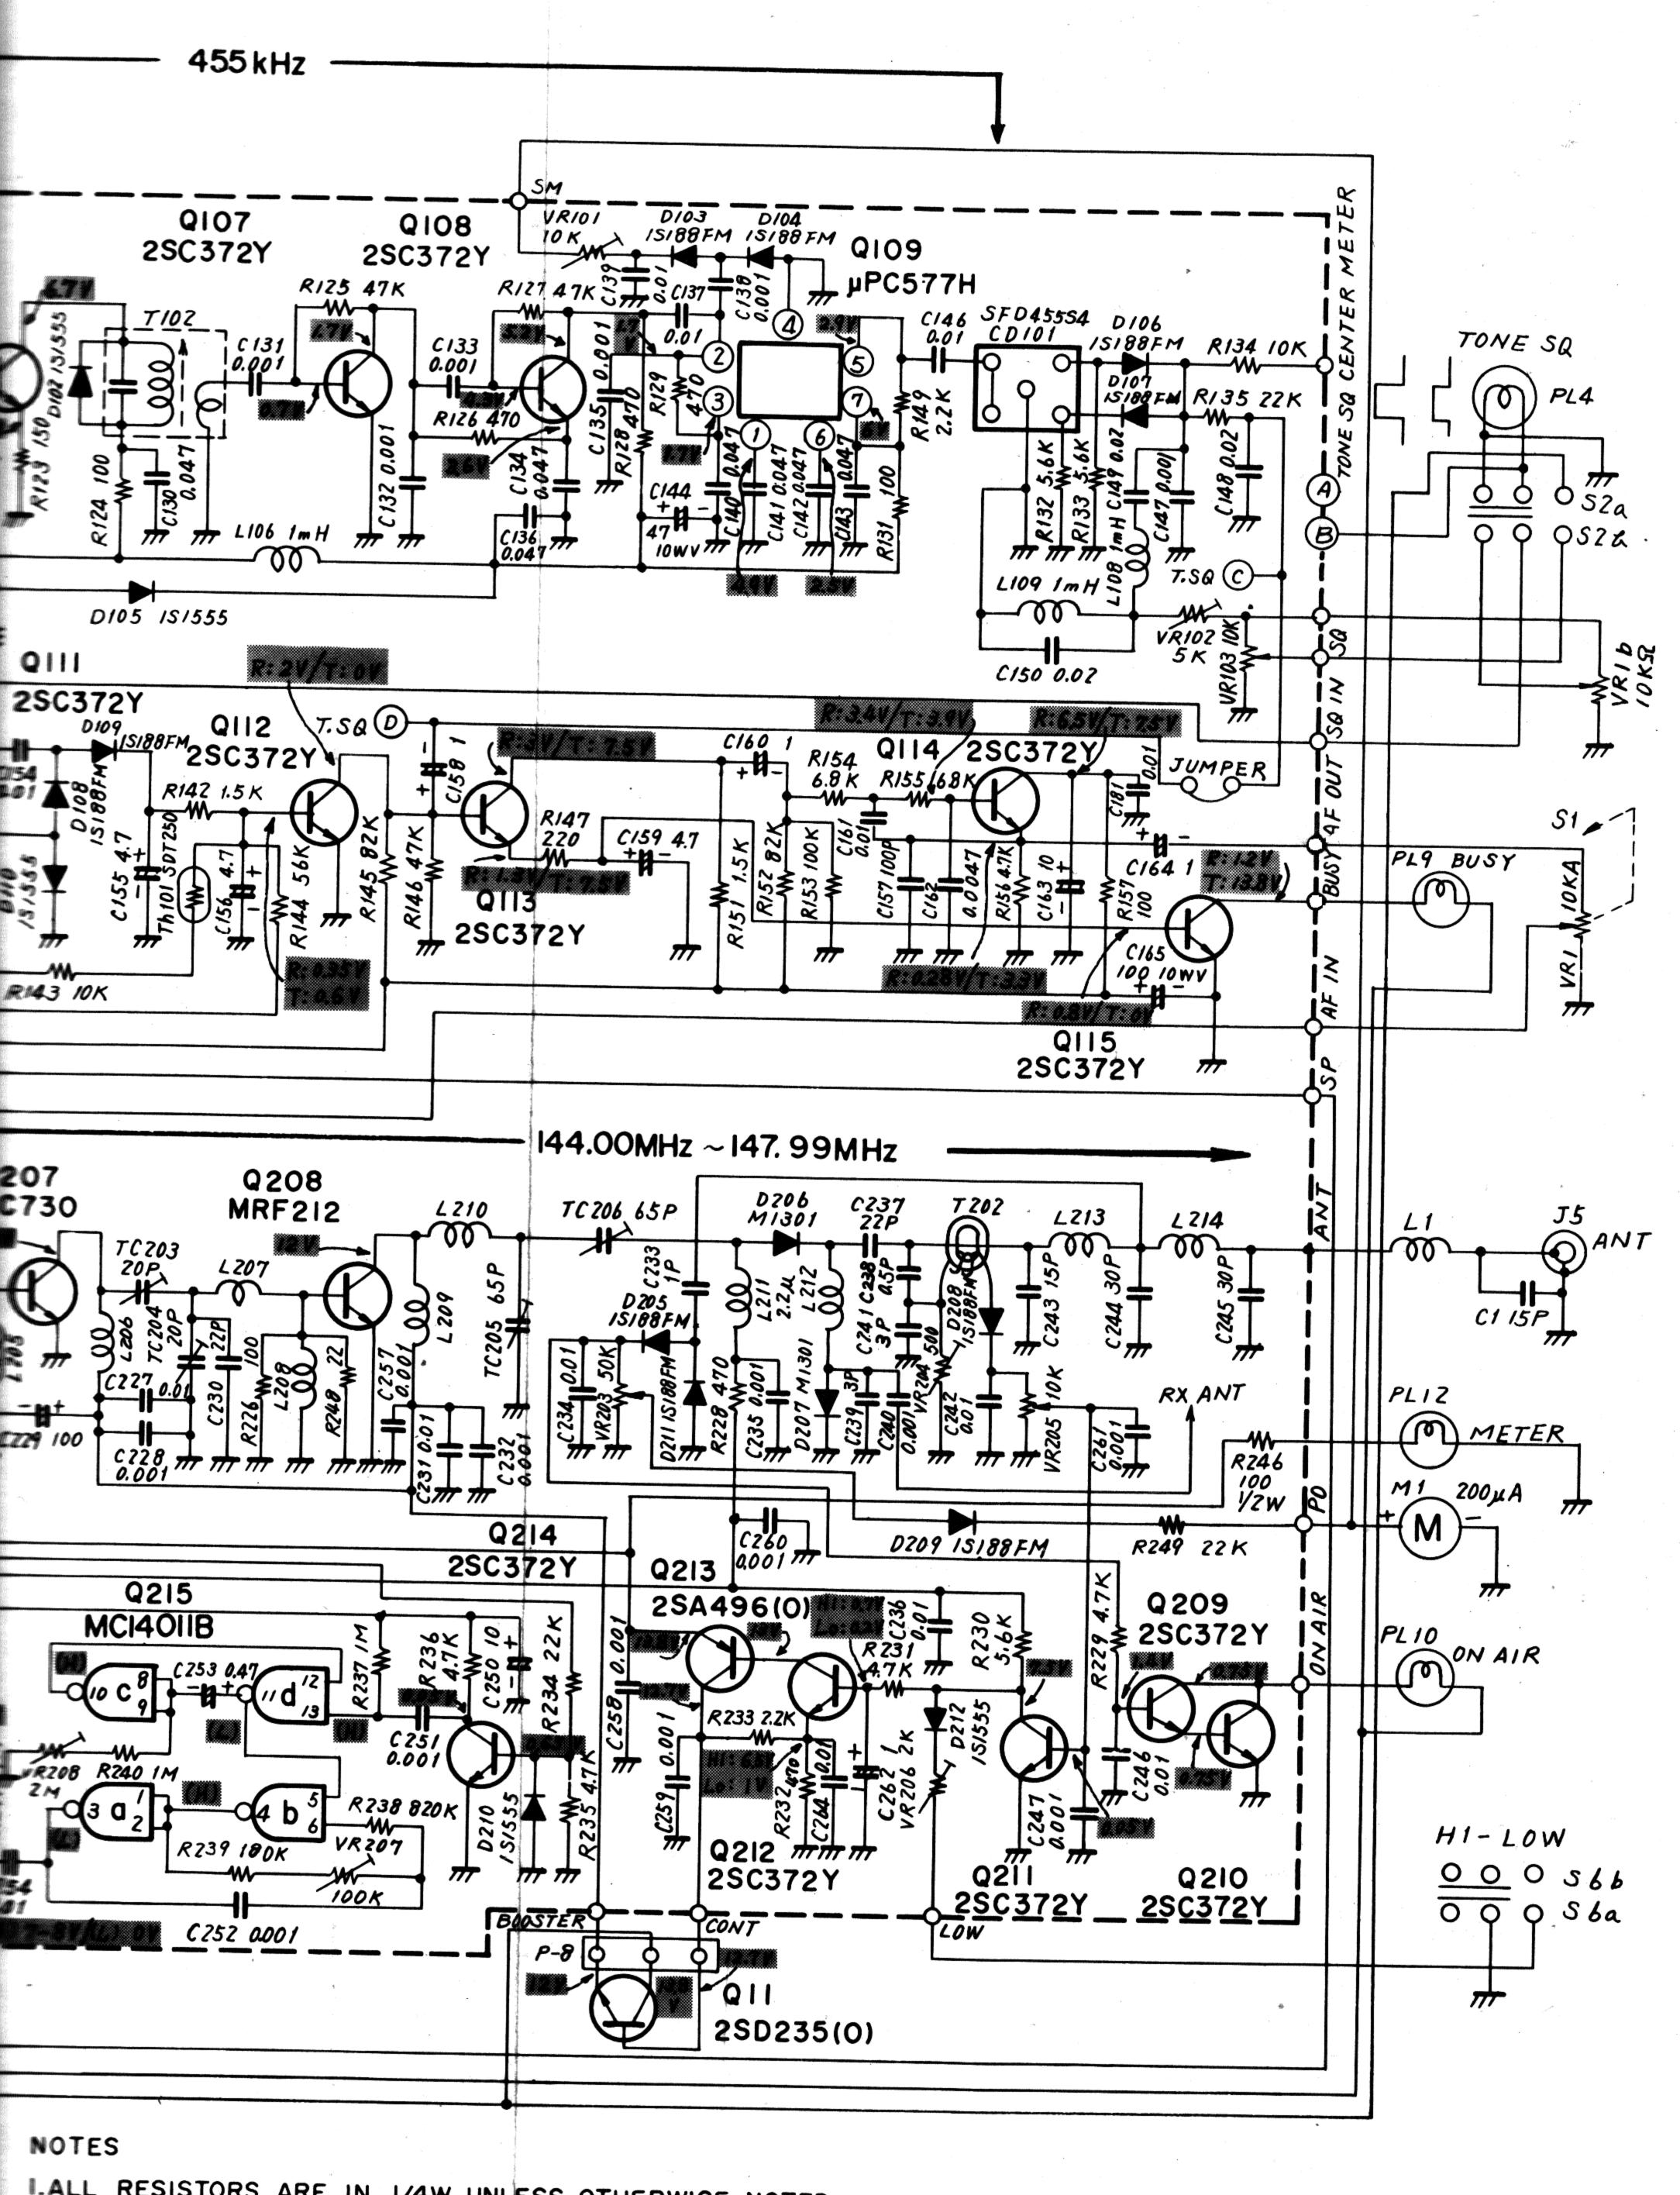

- I.ALL RESISTORS ARE IN 1/4W UNLESS OTHERWISE NOTED.
- 2.ALL CAPACITORS ARE IN µF UNLESS OTHERWISE NOTED.
- 3.ALL ELECTROLYTIC CAPACITORS ARE 16WV UNLESS OTHERWISE NOTED

* * VALUE IS NOMINAL.

Downloaded by □ **Amateur Radio Directory** □ www.hamdirectory.info

FT-227R CIRCUIT DIAGRAM

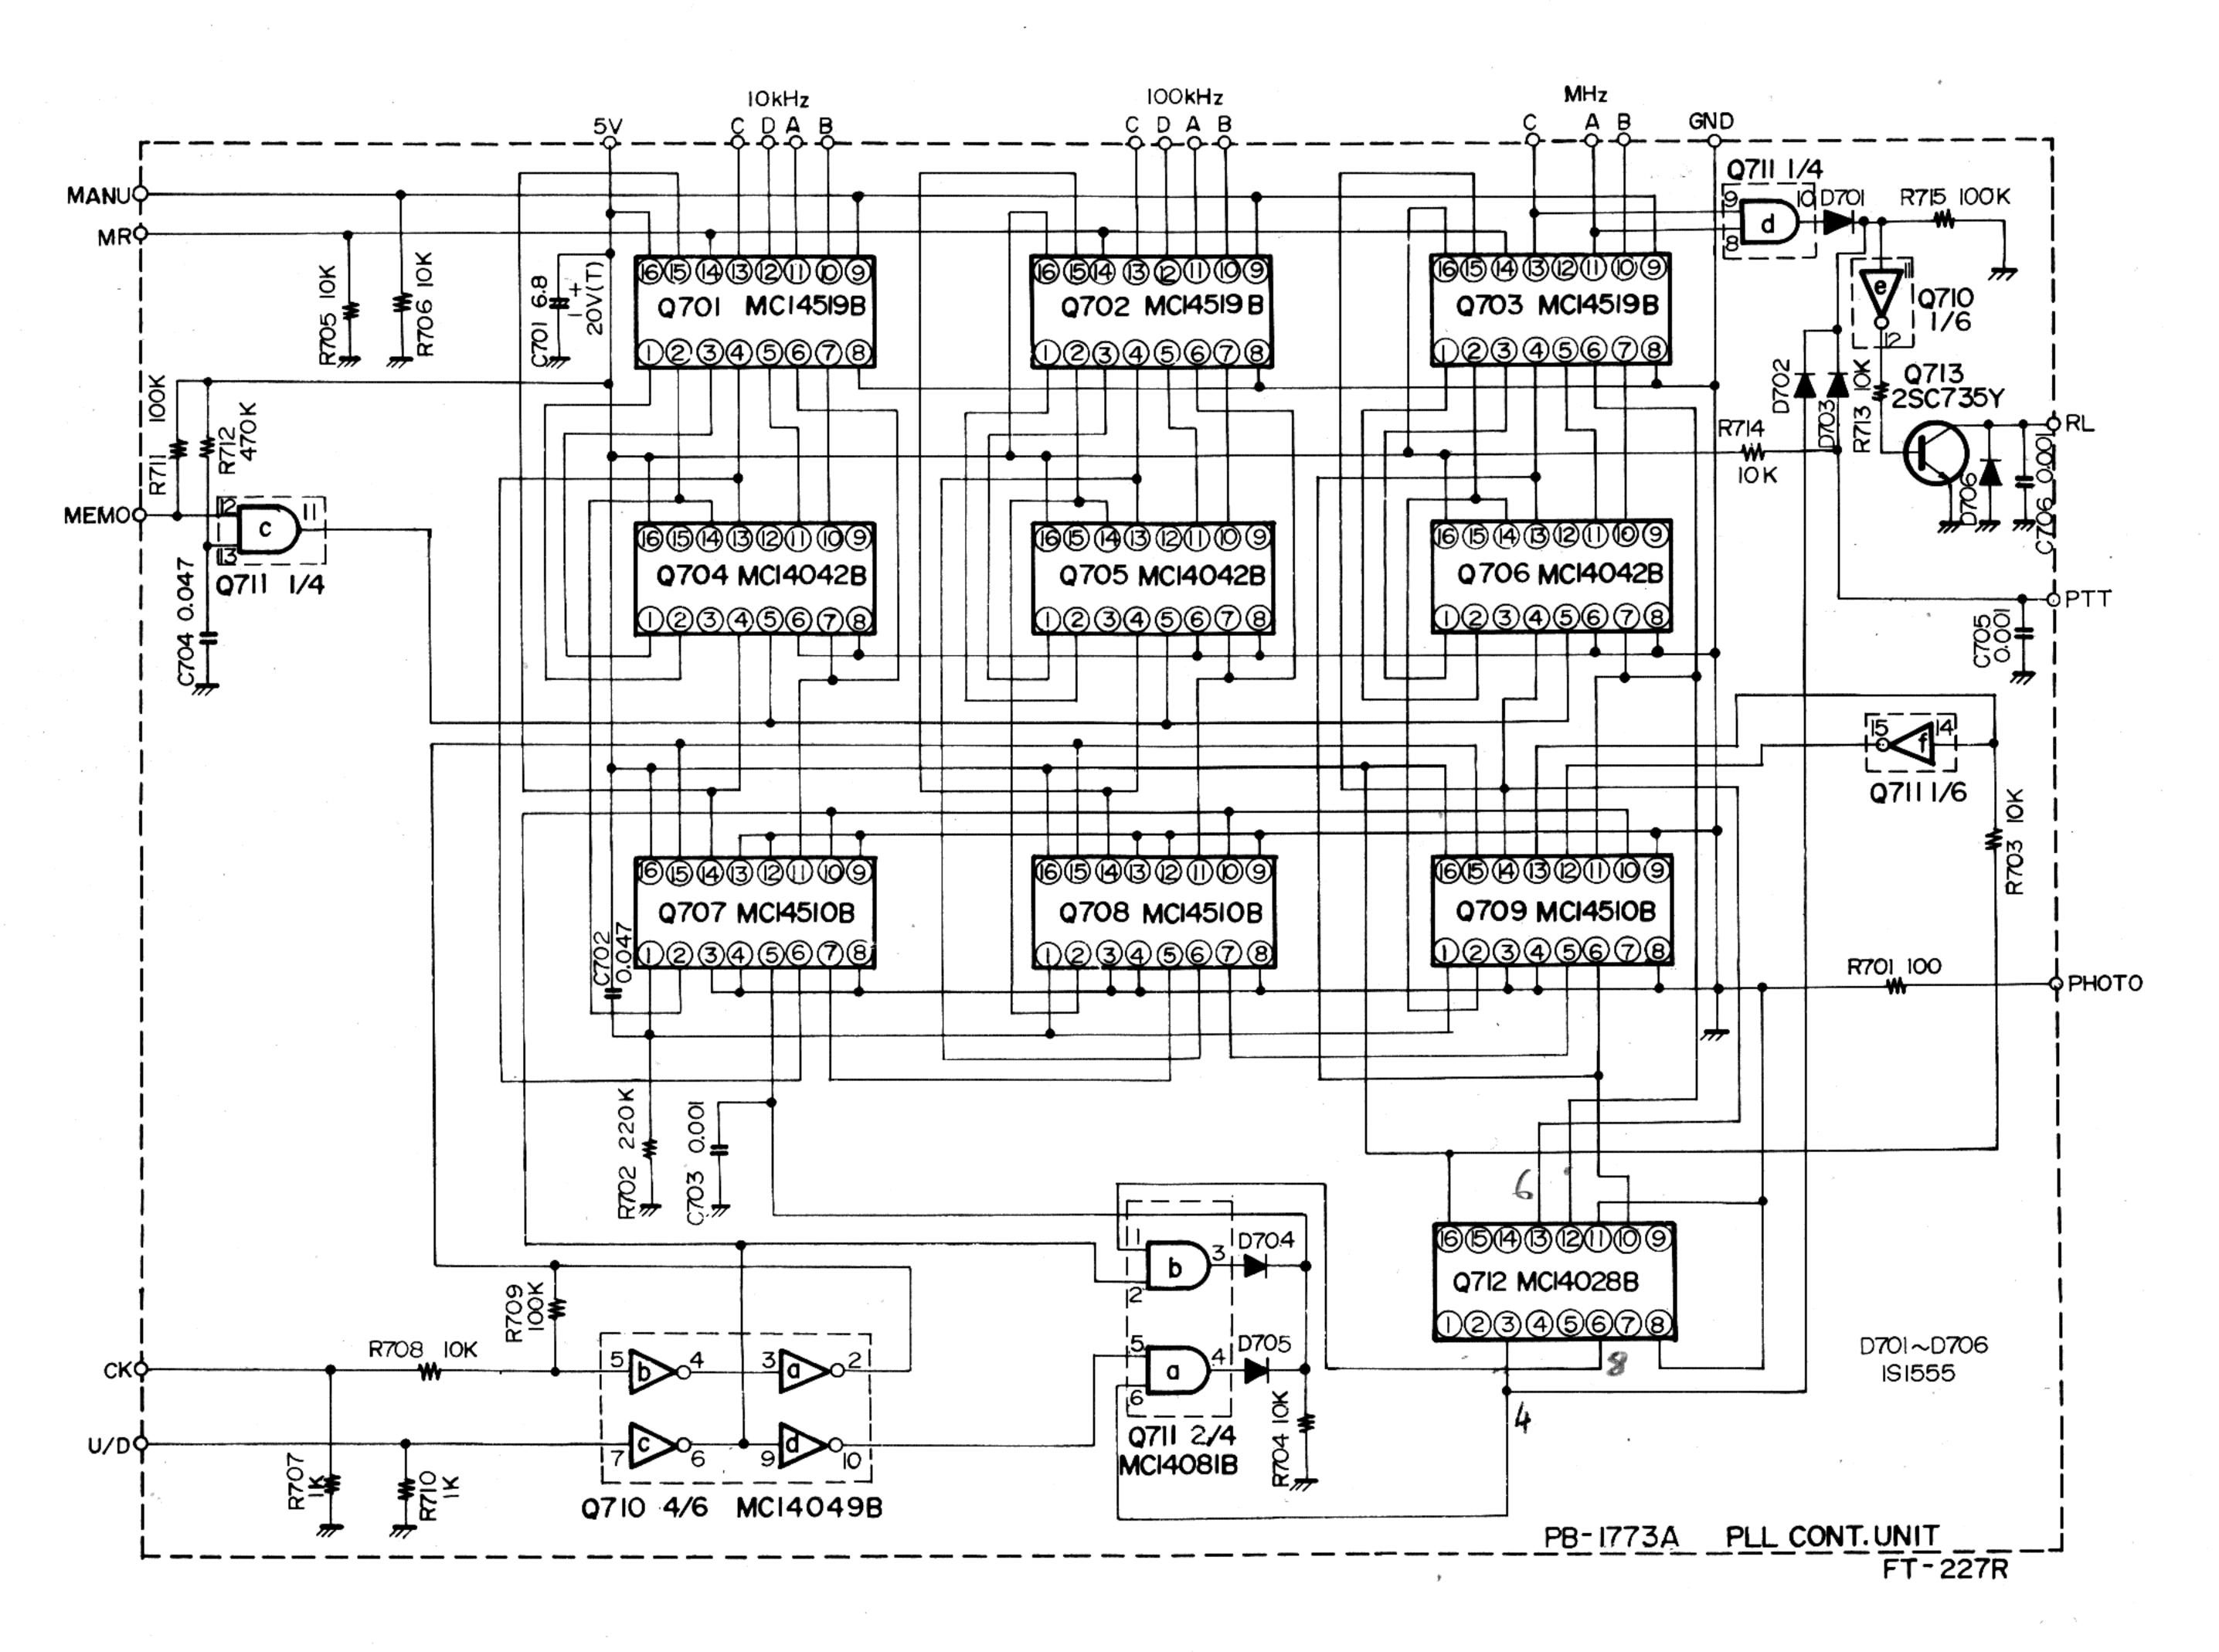


Figure 8

Q308 (μPD857C) PROGRAMMABLE DIVIDER CODE

Q308 PROGRAMMABLE INPUT PIN→			1	2	3	4	5	6	7	8	9	10	11
P /J 305			4	5	6	7	8	9	10	11	12	13	14
P/J304 →		11	10	9	8	7	6	5	4	3	2	1	
FREQUENCY	DIAL	PROGRAMMABLE											
	DISPLAY	DIVIDER RATIO	,				>						
	1	↓	P ₁	P ₂	Рз	P ₄	P ₅	P ₆	P ₇	P ₈	P ₉	P ₁₀	P ₁₁
144.00	4.000	1/100	0	0	0	0	0	0	0	0	1	0	
4.01	4.010	1/101	1	0	0	0	0	0	0	0	1	0	
4.02	4.020	1/102	0	1	0	0	0	0	0		1 .	0	0
4.03	4.030	1/103	1	1	0	0	0	0	0	0	1	0	0
4.04	4.040	1/104	0	0	1	0	0	0	0	0	1	0	0
4.05	4.050	1/105	1	0	1	0	0	0	0	0	1	0	0
4.06	4.060	1/106	0	1	1	0	0	0	0	0	1	0	0
4.07	4.070	1/107	1	1	1	0	0	0	0	0	1	0	$\begin{vmatrix} 0 \\ 0 \end{vmatrix}$
4.08	4.080	1/108	0	0	0		0	0	0	0	1	0	0
4.09	4.090	1/109	1	0	0	1	1	0	0	0	1	0	0
144.10	4.100	1/110	0	0	0	0	1	0	0	0	1	0	0
4.11	4.110	1/111	V T	1	0	0	1	0	0	0	1	<u> </u>	0
4.12	4.120 4.130	1/112 1/113	0	1	0	0	1	0	0	0	1	<u> </u>	0
4.13	4.130	1/113	0	U T	1	n	1	0	0	0	1	0	0
4.14	4.140	1/114	1	0	1	0	1	0	0	0	1	0	
4.16	4.160	1/116	0	1	1	0	1	0	0	0	1	0	0
4.17	4.170	1/117	1	1	1	0	1	0	0	0	1	0	0
4.18	4.180	1/118	0	0	0	1	1	0	0	0	1	0	0
4.19	4.190	1/119	1	0	0	1	1	0	0	0	1	0	0
144.20	4.200	1/120	0	0	0	0	0	1	0	0	1	0	0
4.30	4.300	1/130	0	0	0	0	1	1	0	0	1	0	0
4.40	4.400	1/140	0	0	0	0	0	0	1	0	1	0	0
4.50	4.500	1/150	0	0	0	0	1	0	1	0	1	0	0
4.60	4.600	1/160	0	0	0	0	0	1	1	0	1	0	0
4.70	4.700	1/170	0	0	0	0	1	1	1	0	1	0	0
4.80	4.800	1/180	0	0	0	0	0	0	0	1	1	0	0
4.90	4.900	1/190	0	0	0	0	1	0	0	1	1	0	0
145.00	5.000	1/200	0	0	0	0	0	0	0	0	0	1	0
145.01	5.010	1/201	1	0	0	0	0	0	0	0	0	1	0
145.02	5.020	1/202	0	1	0	0	0	0	0	0	0	1	0
145.03	5.030	1/203	1	1	0	0	0	0	0	0	0	1	0
145.04	5.040	1/204	0	0	1	0	0	0	0	0	0	1	0
145.05	5.050	1/205	1	0	1	0	0	0	0	0	0	1	0
145.06	5.060	1/206	0	1	1	0	0	0	0	0	0	1	0
145.07	5.070	1/207	1	1	1	0	0	0	0	0	0.	1	0
145.08	5.080	1/208	0	0	0	1	0	0	0	0	0	1	0
145.09	5.090	1/209	1	0	0	1	0	0	0	0	0	1	0
145.10	5.100	1/210	0	0	0	0	1	0	0	0	0	1	0
145.20	5.200	1/220	0	0	0	0	0	1	0	0	0	, <u>I</u>	0
145.30	5.300	1/230	0	0	0	0	1	1	0	0	0	1 	0
145.40	5.400	1/240	0	0	0	0	U	0	1	0	0	1	0
145.50	5.500	1/250	0	0	0	0	T	0	1	0	0	1	0
145.60	5.600	1/260	0	0	0	0	1	1	1	0) A	1	0
145.70	5.700	1/270		0	0	0	T	\ \frac{\dagger}{1}	1,	0	0	1 1	0
145.80	5.800	1/280	0	\ \	0	0	0	\ \ \	0	1 1	0	1	0
145.90	5.900	1/290 1/300	0	<u> </u>	0	0	<u>v</u>	<u> </u>	0	U T	1	1	0
146.00	7 000	<u> </u>		0	0	0	0	0	 	0	0	0	1
	7.000	1/400	0	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	0	0	0		0	0	0		1
147.99	7.990	1/499	1	0	0	1	1	0	0	1	0	0	1.

* 1 HIGH LEVEL (5V)

* 0 LOW LEVEL (0V)