

NTSC Color TV Signal Encoder

BA7230LS

The BA7230LS comprises an RGB signal matrix circuit, balanced modulator circuit (rectangular 2-phase modulation), oscillator circuit (VCXO) for a 3.58MHz subcarrier synchronized with video input burst signals, luminosity and color difference signal mixing circuit, and a high speed switch for selecting composite signals of video input and RGB input. RGB signals, synch signals, $\overline{\text{BFP}}$ (burst flag pulses), $\overline{\text{PCP}}$ (pedestal clamp pulses) are input, and an NTSC composite signal is output.


●Applications

Televisions (Teletext-capable), caption systems, video cameras, personal computers

●Features

- 1) Allows superimposition of video images (VIDEO IN) and computer images (RGB IN).
- 2) During superimposition, the subcarrier locked onto the video input burst signal RGB is modulated with the RGB signals by the APC circuit, preventing unnatural color disturbance due to switching.
- 3) Both the RGB and video input signals are pedestal-clamped, maintaining a natural image even during fluctuation in luminosity.
- 4) Using a half down pulse, the video signal can be reduced by 5dB to darken the background and make the superimposed RGB image easier to see.
- 5) Carrier leak is suppressible to less than 70mV_{P-P} ($V_{\text{OUT}} = 2V_{\text{P-P}}$) without adjustment.
- 6) Can be adapted for analog RGB input.
- 7) Compact 24-pin SZIP package minimizes external components.

●Block diagram

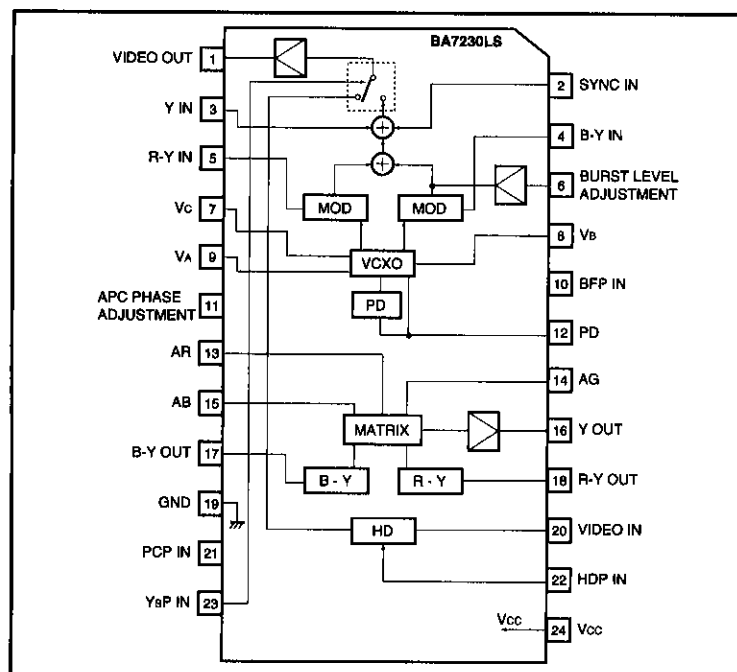

● Pin input/output circuits

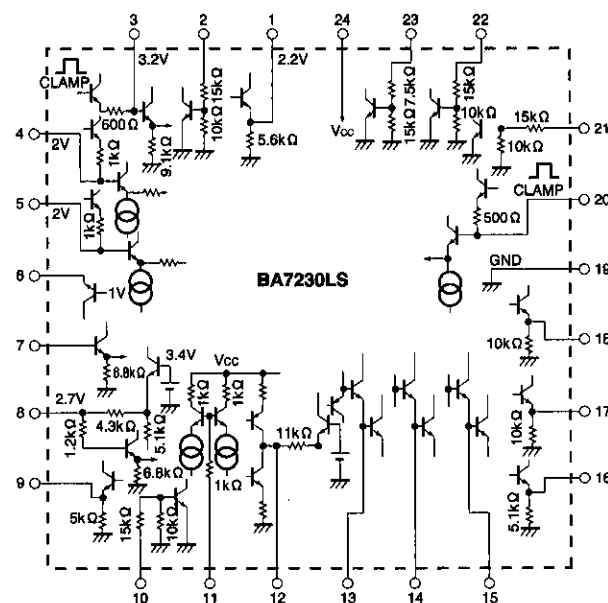


Fig. 1

● Absolute maximum ratings ($T_a=25^\circ\text{C}$)

Parameter	Symbol	Limits	Unit
Power supply voltage	V_{CC}	7.0	V
Power dissipation	P_d	500 *	mW
Operating temperature	T_{opr}	$-20 \sim +70$	$^\circ\text{C}$
Storage temperature	T_{stg}	$-55 \sim +125$	$^\circ\text{C}$

* Reduced by 5.0 mW for each increase in T_a of 1°C over 25°C .

● Recommended operating conditions

Parameter	Symbol	Limits	Unit
Power supply voltage	V_{CC}	4.5~5.5	V
R input level	V_R	0~0.7	V_{P-P}
G input level	V_G	0~0.7	V_{P-P}
B input level	V_B	0~0.7	V_{P-P}
Video input level	V_{IN}	0~1.0	V_{P-P}

Analog NTSC/PAL encoders

Multimedia video

●Electrical characteristics (unless otherwise specified, Ta=25°C, Vcc=5.0V)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions	Measurement Circuit
Quiescent current	I _Q	—	38	54	mA	—	Fig.2
Video output level	V _{OV}	1.7	2.2	2.6	V _{P-P}	VIDEO IN=1V _{P-P}	Fig.2
Half down level change	G _{VH}	-3	-5	-7	dB	—	Fig.2
DC offset	V _{OF}	—	50	160	mV _{P-P}	VIDEO IN=1V _{P-P}	Fig.2
Crosstalk	CT	—	-46	-40	dB	VIDEO IN=1V _{P-P}	Fig.2
ER-EY output level	V _{R-Y}	0.3	0.42	0.55	V _{P-P}	V _R =0.7V _{P-P}	Fig.2
EB-EY output level	V _{B-Y}	0.2	0.31	0.42	V _{P-P}	V _B =0.7V _{P-P}	Fig.2
YOUT output level	V _Y	1.0	1.4	1.8	V _{P-P}	V _R =V _G =V _B =0.7V _{P-P}	Fig.2
Ys switching delay time	T _D	—	60	—	ns	—	Fig.2
SYNC output level	V _{OS}	0.4	0.65	0.9	V _{P-P}	—	Fig.2
Burst output level	V _{OB}	0.25	0.46	0.8	V _{P-P}	R _E =1.8kΩ	Fig.2
Composite output level	V _{OY}	1.7	2.2	2.6	V _{P-P}	Y _{IN} =0.7V _{P-P}	Fig.2
R-Y modulation gain	G _{R-Y}	9	11	13	dB	R - Y _{IN} =0.3V _{P-P}	Fig.2
B-Y modulation gain	G _{B-Y}	9	11	13	dB	B - Y _{IN} =0.2V _{P-P}	Fig.2
(R-Y) / (B-Y) modulation gain differential	G _{R-B}	—	—	2	dB	Difference between above gains	Fig.2
(R-Y) / (B-Y) orthogonal phase shift	ΔR	-6	—	6	deg	—	Fig.2
(R - Y) · Burst orthogonal phase shift	ΔB	-6	—	6	deg	—	Fig.2
Carrier leak	L _{SC}	—	30	70	mV _{P-P}	V _{OUT} =2V _{P-P}	Fig.2
APC capture range	f _{CAP}	±100	—	—	Hz	Burst=0.1V _{P-P} , 2.8 μS	Fig.2
Carrier phase range	φ _{SC}	±30	±45	—	deg	Superimposition	Fig.2
Video frequency characteristic	f _V	4.5	6	—	MHz	-3 dB when f = 100 kHz	Fig.2
Video output DG	DG	—	±3.5	—	%	VIDEO IN=1V _{P-P}	Fig.2
Video output DP	DP	—	±2.5	—	deg	VIDEO IN=1V _{P-P}	Fig.2
Input impedance (SY, BF, PC, HD)	Z _T	8	15	—	kΩ	—	Fig.2
Input impedance (Ys)	Z _{TY}	3	7.5	—	kΩ	—	Fig.2
Threshold level (SY, BF, PC, HD)	V _T	0.9	2.0	2.8	V	—	Fig.2
Threshold level (Ys)	V _{TY}	0.5	1.1	1.8	V	—	Fig.2

● Measurement circuit

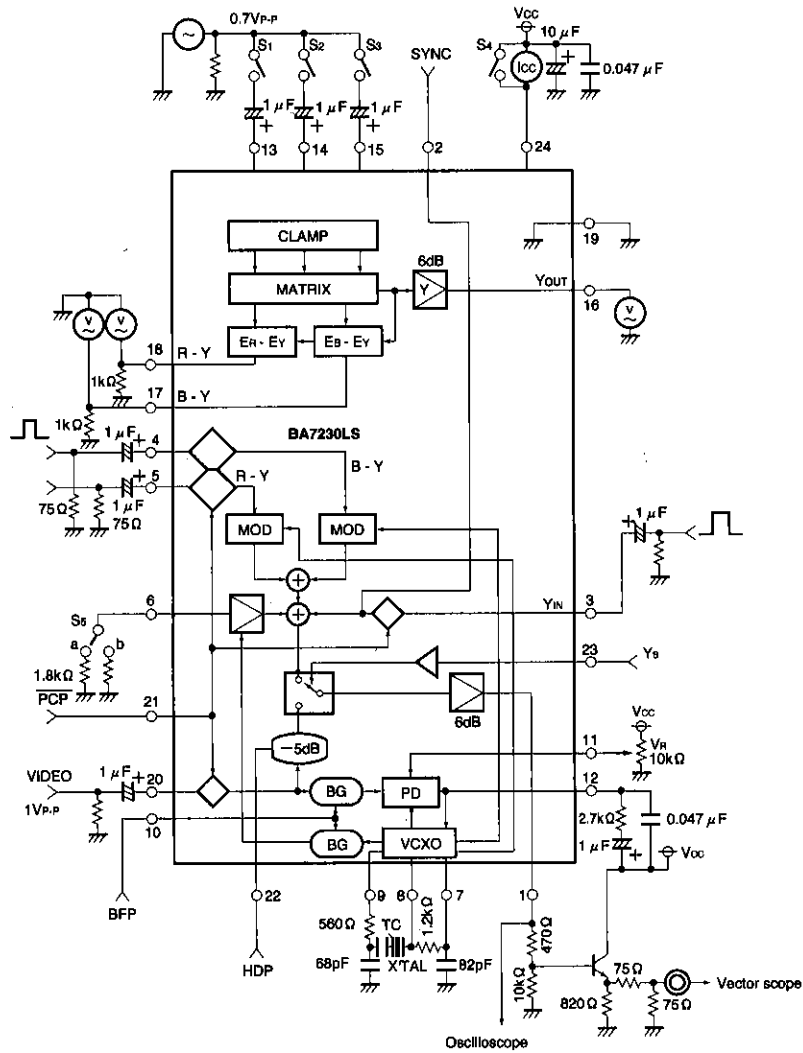


Fig. 2

●Application example

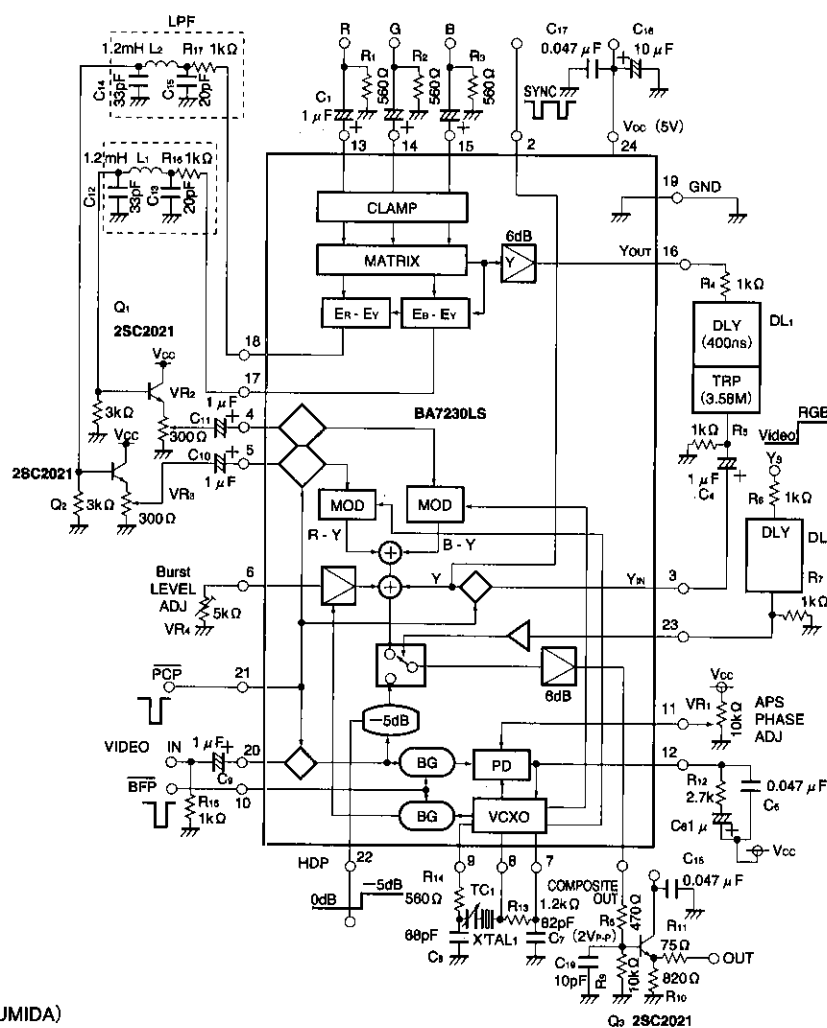


Fig. 3

● Circuit operation

1) Matrix circuit

The R, G and B inputs are clamped to 3.2V by the clamp circuit and combined into signals E_Y , $E_R - E_Y$ and $E_B - E_Y$ by the resistance-adding matrix circuit.

$$E_Y = 0.30E_R + 0.59E_G + 0.11E_B$$

$$E_R - E_Y = 0.70E_R - 0.59E_G - 0.11E_B$$

$$E_B - E_Y = -0.30E_R - 0.59E_G + 0.89E_B$$

Signal E_Y is then amplified by the 6dB amplifier (pin 16) to compensate for the signal's 6dB attenuation in the delay line. To prevent overmodulation, signal $E_R - E_Y$ is output at $1/1.14$ and signal $E_B - E_Y$ at $1/2.03$ (pins 17 and 18).

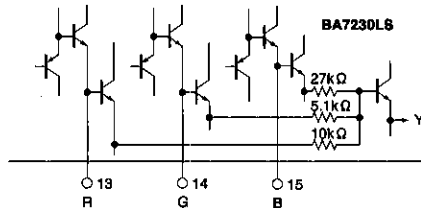


Fig. 4

2) Balanced modulator circuit

Color difference signals are modulated (rectangular 2-phase balanced modulation) with color subcarriers (3.58MHz) having a 90° phase difference. This is called the carrier color signal.

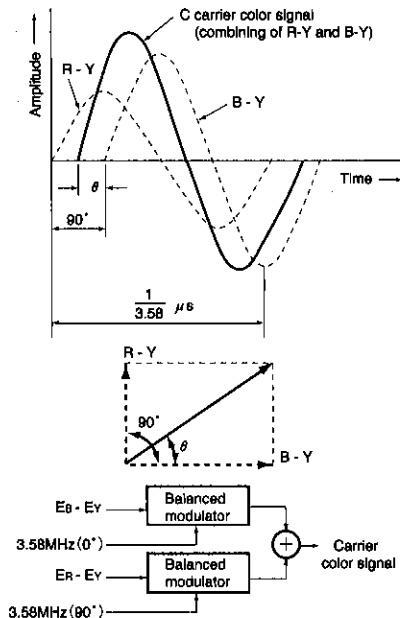


Fig. 5

The carrier color signal is mixed with color burst signals and luminosity signals E_Y (to which a horizontal synchronization signal is added) to create the NTSC composite signal (E_N).

$$E_N = E_Y + \frac{E_B - E_Y}{1.14} \cos 2\pi f_{st} + \frac{E_R - E_Y}{2.03} \sin 2\pi f_{st}$$

3) Switch circuit

Signal Y_s (pin 23) switches between video input and RGB composite signals. Performing this switching at high speeds results in superimposition.




Fig. 6

4) Color subcarrier oscillator circuit

The subcarrier oscillator circuit for RGB input. This circuit is synchronized with the video input color burst signal extracted by BFP (burst flag pulses) during superimposition, preventing any unnatural color disturbance due to switching between RGB and video input.

This oscillator circuit generates the RGB color burst signal. An attached variable resistor can be used to change the amplitude of the color burst signal and to adjust its phase relative to the video color burst signal. This oscillator circuit remains in the free-running state when there is no video input.

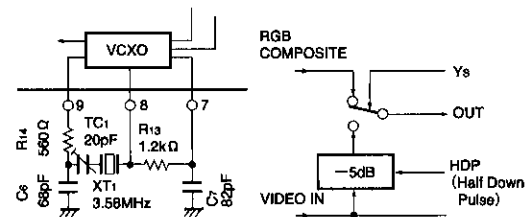


Fig. 7

Fig. 8

5) During superimposition, video input can be lowered by about 5dB using an HDP (half-down pulse), darkening the background and making RGB input easier to see.

● Input waveform and timing chart

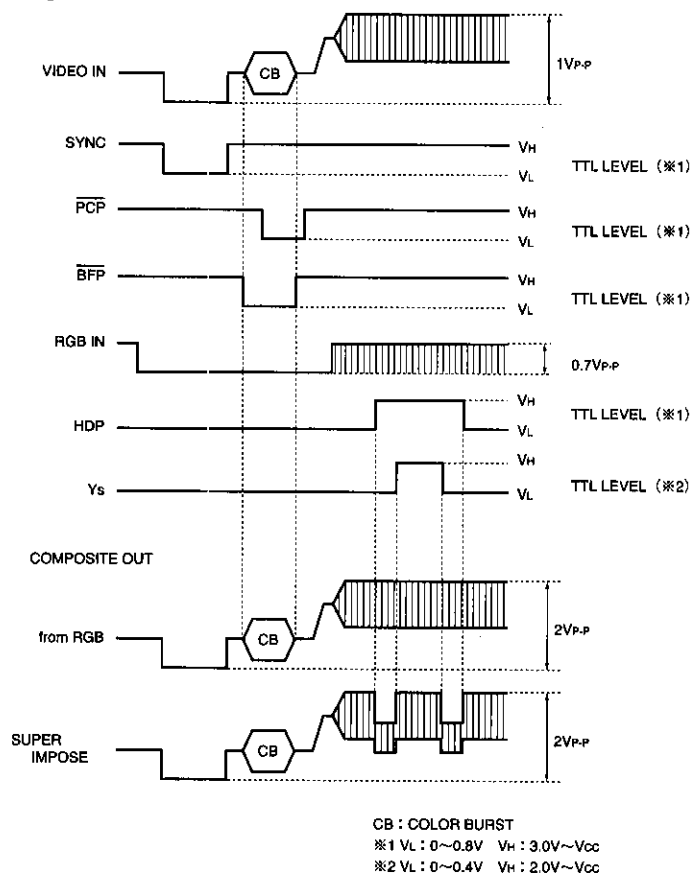


Fig. 9

● Operation notes

- 1) RGB and video inputs should be synchronized. When only RGB is input, connect VIDEO IN (pin 20) to GND with a $1\ \mu\text{F}$ capacitor, and synchronize PCP and BFP to RGB.
- 2) Input pins with pedestal clamps cannot be left open and must be grounded with a low impedance. When not used, ground with a $1\ \mu\text{F}$ capacitor.
 ※ Input pins with pedestal clamps :
 Y_{IN} (pin 3), B-Y_{IN} (pin 4), R-Y_{IN} (pin 5), VIDEO IN (pin 20)




Fig. 10

- 3) The VCXO remains in a free-running state except during superimposition.
- 4) Pin 4 (B-Y_{IN}) and pin 5 (R-Y_{IN}) have high impedance and are susceptible to the effects of noise and other external factors during pattern generation. For this reason, we recommend adding the circuit in Fig. 11 to lower the input impedance. Adding this circuit can also reduce carrier leakage.

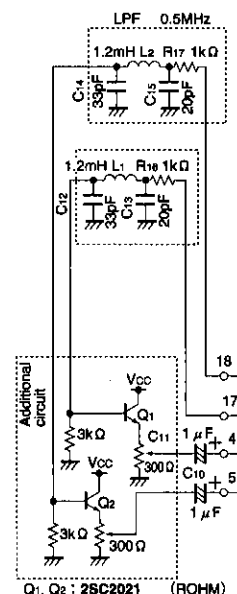


Fig. 11

● Electrical characteristic curves

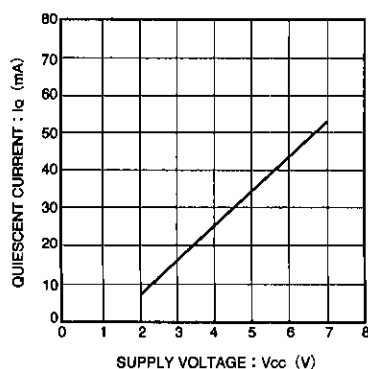


Fig. 12 Quiescent current vs. supply voltage characteristic

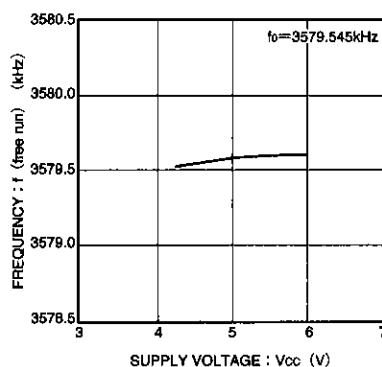


Fig. 13 VCXO free-run frequency vs. supply voltage characteristic

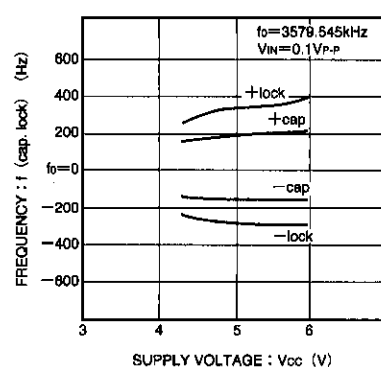


Fig. 14 Capture range and lock range (I) vs. supply voltage characteristic

Analog NTSC/PAL encoders

Multimedia video


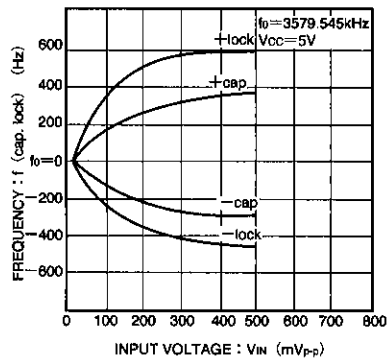


Fig. 15 Capture range and lock range (II) vs. input voltage characteristics

● External dimensions (Units: mm)

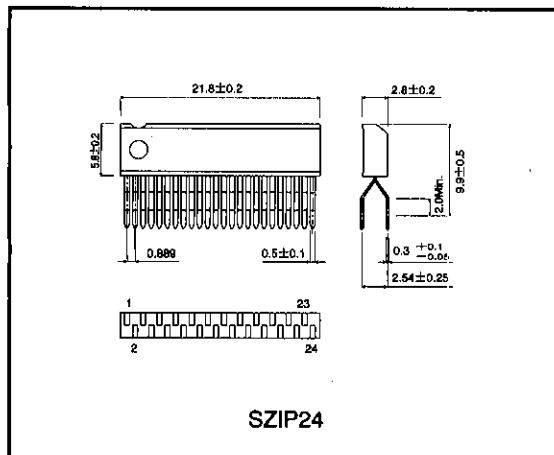

Notes

- The contents described in this catalogue are correct as of March 1997.
- No unauthorized transmission or reproduction of this book, either in whole or in part, is permitted.
- The contents of this book are subject to change without notice. Always verify before use that the contents are the latest specifications. If, by any chance, a defect should arise in the equipment as a result of use without verification of the specifications, ROHM CO., LTD., can bear no responsibility whatsoever.
- Application circuit diagrams and circuit constants contained in this data book are shown as examples of standard use and operation. When designing for mass production, please pay careful attention to peripheral conditions.
- Any and all data, including, but not limited to application circuit diagrams, information, and various data, described in this catalogue are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO., LTD., disclaims any warranty that any use of such device shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes absolutely no liability in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices; other than for the buyer's right to use such devices itself, resell or otherwise dispose of the same; no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by ROHM CO., LTD., is granted to any such buyer.
- The products in this manual are manufactured with silicon as the main material.
- The products in this manual are not of radiation resistant design.

The products listed in this catalogue are designed to be used with ordinary electronic equipment or devices (such as audio-visual equipment, office-automation equipment, communications devices, electrical appliances, and electronic toys). Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers, or other safety devices) please be sure to consult with our sales representatives in advance.

- Notes when exporting
 - It is essential to obtain export permission when exporting any of the above products when it falls under the category of strategic material (or labor) as determined by foreign exchange or foreign trade control laws.
 - Please be sure to consult with our sales representatives to ascertain whether any product is classified as a strategic material.