


C-MOS FIFO FOR BASEBAND VIDEO

—TOP VIEW—

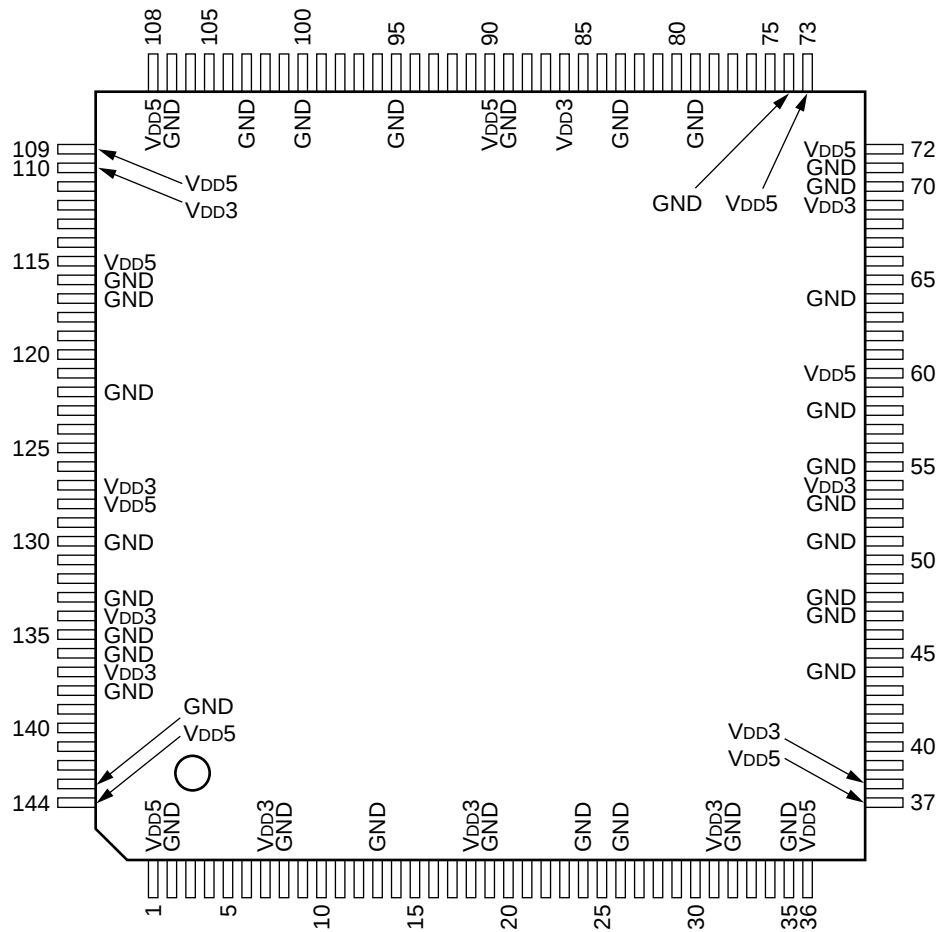

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	VDD5	37	—	VDD5	73	—	VDD5	109	—	VDD5
2	—	GND	38	—	VDD3	74	—	GND	110	—	VDD3
3	I	RST	39	I	CI6	75	O	RY6	111	O	YOB
4	I	HDL	40	I	CI7	76	O	RY5	112	O	YOA
5	I	YFIX	41	I	CI8	77	O	RY4	113	O	YO9
6	I	MPX	42	I	CI9	78	O	RY3	114	O	YO8
7	—	VDD3	43	I	CIA	79	—	GND	115	—	VDD5
8	—	GND	44	—	GND	80	O	RY2	116	—	GND
9	I	YI0	45	I	CIB	81	O	RY1	117	—	GND
10	I	YI1	46	I	CFIX	82	O	RY0	118	O	YO7
11	I	YI2	47	—	GND	83	—	GND	119	O	YO6
12	I	YI3	48	—	GND	84	I	COE	120	O	YO5
13	—	GND	49	I	CKI3	85	O	CBCK	121	O	YO4
14	I	YI4	50	O	CKO3	86	—	VDD3	122	—	GND
15	I	YI5	51	—	GND	87	O	BYB	123	O	YO3
16	I	YI6	52	O	BPO	88	O	BYA	124	O	YO2
17	I	YI7	53	—	GND	89	—	GND	125	O	YO1
18	—	VDD3	54	—	VDD3	90	—	VDD5	126	O	YO0
19	—	GND	55	—	GND	91	O	BY9	127	—	VDD3
20	I	YI8	56	I	CKI2	92	O	BY8	128	—	VDD5
21	I	YI9	57	O	CKO2	93	O	BY7	129	O	YPO
22	I	YIA	58	—	GND	94	O	BY6	130	—	GND
23	I	YIB	59	O	CPO	95	—	GND	131	O	CKO1
24	—	GND	60	—	VDD5	96	O	BY5	132	I	CKI1
25	I	WCK	61	I	CSP	97	O	BY4	133	—	GND
26	—	GND	62	O	CRCK	98	O	BY3	134	—	VDD3
27	I	CI0	63	O	RYB	99	O	BY2	135	—	GND
28	I	CI1	64	—	GND	100	—	GND	136	—	GND
29	I	CI2	65	O	RYA	101	O	BY1	137	—	VDD3
30	I	CI3	66	O	RY9	102	O	BY0	138	—	GND
31	—	VDD3	67	O	RY8	103	—	GND	139	I	C
32	—	GND	68	O	RY7	104	O	YCK	140	I	B
33	I	CI4	69	—	VDD3	105	I	DL5	141	I	A
34	I	CI5	70	—	GND	106	I	YOE	142	I	INV
35	—	GND	71	—	GND	107	—	GND	143	—	GND
36	—	VDD5	72	—	VDD5	108	—	VDD5	144	—	VDD5