

APPLICATION NOTE

A wide-band class-A linear power amplifier (174 – 230 MHz) with two transistors BLV33

ECO7904

A wide-band class-A linear power amplifier (174 – 230 MHz) with two transistors BLV33

**Application Note
ECO7904**

CONTENTS

1	ABSTRACT
2	INTRODUCTION
3	DESIGN OF THE AMPLIFIER
4	ADJUSTMENTS OF THE AMPLIFIER
5	ASSEMBLING OF THE AMPLIFIER AND MECHANICAL DATA
6	MEASURED RESULTS
7	CONCLUSION
8	REFERENCES

A wide-band class-A linear power amplifier (174 – 230 MHz) with two transistors BLV33

Application Note ECO7904

1 ABSTRACT

For application in driver or final stages of TV-transposers in band III (174 – 230 MHz) a linear wideband power amplifier has been designed with 2 transistors BLV33, coupled by means of 3 dB –90° hybrids.

Each transistor is adjusted in class-A at $V_{CE} = 25$ V and $I_C = 3.25$ A. A demonstration model showed a peak sync output power of 40 W at a 3-tone I.M. distortion between –56 and –58 dB. At this power level the cross-modulation varied from 6 to 7.5%. The power gain is between 8.35 and 8.6 dB.

2 INTRODUCTION

For application in T.V. transposers and transmitters for band III a wideband linear power amplifier has been designed with 2 transistors BLV33, coupled by means of 3 dB –90° hybrids. Each transistor is adjusted in class-A at $V_{CE} = 25$ V and $I_C = 3.25$ A.

3 DESIGN OF THE AMPLIFIER

For class-A operation the BLV33 is specified at $V_{CE} = 25$ V, $I_C = 3.25$ A. The corresponding typical gain, input and load impedance are given below:

Table 1

FREQ. (MHz)	GAIN (dB)	INPUT IMPEDANCE (Ω)	LOAD IMPEDANCE (Ω)
174	11.3	$0.68 + j1.20$	$2.70 + j1.19$
202	10.1	$0.68 + j1.43$	$2.30 + j0.87$
230	9.08	$0.68 + j1.64$	$1.99 + j0.52$

A computer-aided circuit design, carried out by Mr. Hilbers (Central Application Laboratory) indicated a gain of 9.1 dB ± 0.1 dB and V.S.W.R. figures of 4.3 (170 MHz), 2.78 (202 MHz) and 1.18 at 230 MHz for a single amplifier.

To obtain a high linear output and at the same time good input and output matching (V.S.W.R. ≤ 1.2) 3 dB –90° hybrids are used. The reflected input power will be absorbed in the 50 Ω resistor, matching the isolated port (see Fig.1). There are some small differences (value and place of chip capacitors) between the theoretical design and practical circuit. For detailed information on computer-aided design see Refs 1 and 2. Mainly due to the insertion loss of the 3 dB hybrids the gain drops from 9 to 8.5 dB. The transistors used in this particular amplifier are typical products, measured in a narrow band test amplifier and specified as follows:

$$V_{CE} = 25 \text{ V} - I_C = 3.25 \text{ A} - T_h = 70 \text{ }^\circ\text{C}$$

A wide-band class-A linear power amplifier (174 – 230 MHz) with two transistors BLV33

Application Note ECO7904

Table 2

Transistor type	BLV33	
Batch no.	MD 8-14 no 5	MD 8-14 no 10
Vision frequency	224.25 MHz	
Output power (peak sync)	22.9 W	22.6 W
Intermodulation product	–55 dB	–55 dB
Gain	9.03 dB	9.11 dB

4 ADJUSTMENTS OF THE AMPLIFIER

The amplifier consists of two equal BLV33 branches (see Fig.1) and both transistors are separately biased at $V_{CE} = 25$ V, $I_C = 3.25$ A. A schematic diagram and lay-out of the bias unit is given in Fig.2. Each branch was adjusted for maximum and flat gain by means of a high power sweep with a frequency range from 170 to 230 MHz. The output power of the amplifier was levelled at 40 W which means about 50% of the D.C. input power.

After that, both branches are coupled by means of 3 dB –90° hybrids, input and output matching of the complete amplifier are adjusted below a V.S.W.R. of 1.2 with the aid of capacitors C1-C2-C37-C38 as shown in Fig.1.

5 ASSEMBLING OF THE AMPLIFIER AND MECHANICAL DATA

Due to the dimensions of the p.c. board (220 × 210 mm) 2 extruded blackened aluminium heatsinks (cat. no. 56293) are screwed together. The transistors are screwed on an aluminium plate (thickness 12 mm) which on its turn is screwed on the heatsink. Special attention has been paid to the surface finishing to keep the thermal resistance as low as possible. Figure 3 showed the p.c. board and lay-out of the amplifier.

Dimensions: l = 224 mm – w = 223 mm – h = 113 mm. Weight: 7.5 kg.

6 MEASURED RESULTS

Table 3

Frequency range	170 to 230 MHz		
Output power (peak sync)	30 W	40 W	50 W
I.M. distortion	–60 dB	–56 dB	–54 dB; note 1
Cross modulation	3%	6/7.5%	10/15.5%; note 2
Output power for 1 dB gain compression	100 W		
Gain at 40 W output level	8.5 dB ±0.1 dB		
Input and output V.S.W.R.	≤1.2		
Ambient temp.	25 °C		
Heatsink temp.	65 °C		
Transistor stud temp.	85 °C		

Notes

- Vision carrier –8 dB, sound carrier –7 dB, side signal –16 dB, zero dB corresponds to peak sync level;
 $f_{\text{sound}} = f_{\text{vision}} + 5.5$ MHz, $f_{\text{sideband}} = f_{\text{vision}} - 1$ MHz to $f_{\text{vision}} + 6$ MHz.
- Vision carrier 0 dB, sound carrier –7 dB: voltage variation of sound carrier (%) when the vision carrier is switched from –20 dB to 0 dB; $f_{\text{sound}} = f_{\text{vision}} + 5.5$ MHz.

A wide-band class-A linear power amplifier (174 – 230 MHz) with two transistors BLV33

Application Note
ECO7904

In Fig.4 the typical results of crossmodulation and intermodulation measurements on a demonstration amplifier have been given. Figures 5 and 6 show the S-parameters of the complete amplifier. The measuring set-up is depicted in Fig.7.

7 CONCLUSION

Two transistors BLV33, coupled by means of 3 dB -90° hybrids, can deliver an output power of typ. 40 W with an associated gain of 8.5 dB. Required D.C. input power approx. 165 W. Using a high power sweep with adjustable transistor output power levelling provides a suitable method to adjust a linear wideband power amplifier.

8 REFERENCES

Ref. 1:

G.L. Matthaei – Tables of Chebyshev Impedance Transforming Networks of Low-Pass Filter Form. Proceedings of the IEEE August 1964, pp. 939 – 963.

Ref. 2:

A.H. Hilbers and M.J. Köppen – A wide-band linear power amplifier (470 – 860 MHz) with two transistors BLW34. C.A.B. report ECO7901.

A wide-band class-A linear power amplifier (174 – 230 MHz) with two transistors BLV33

Application Note
ECO7904

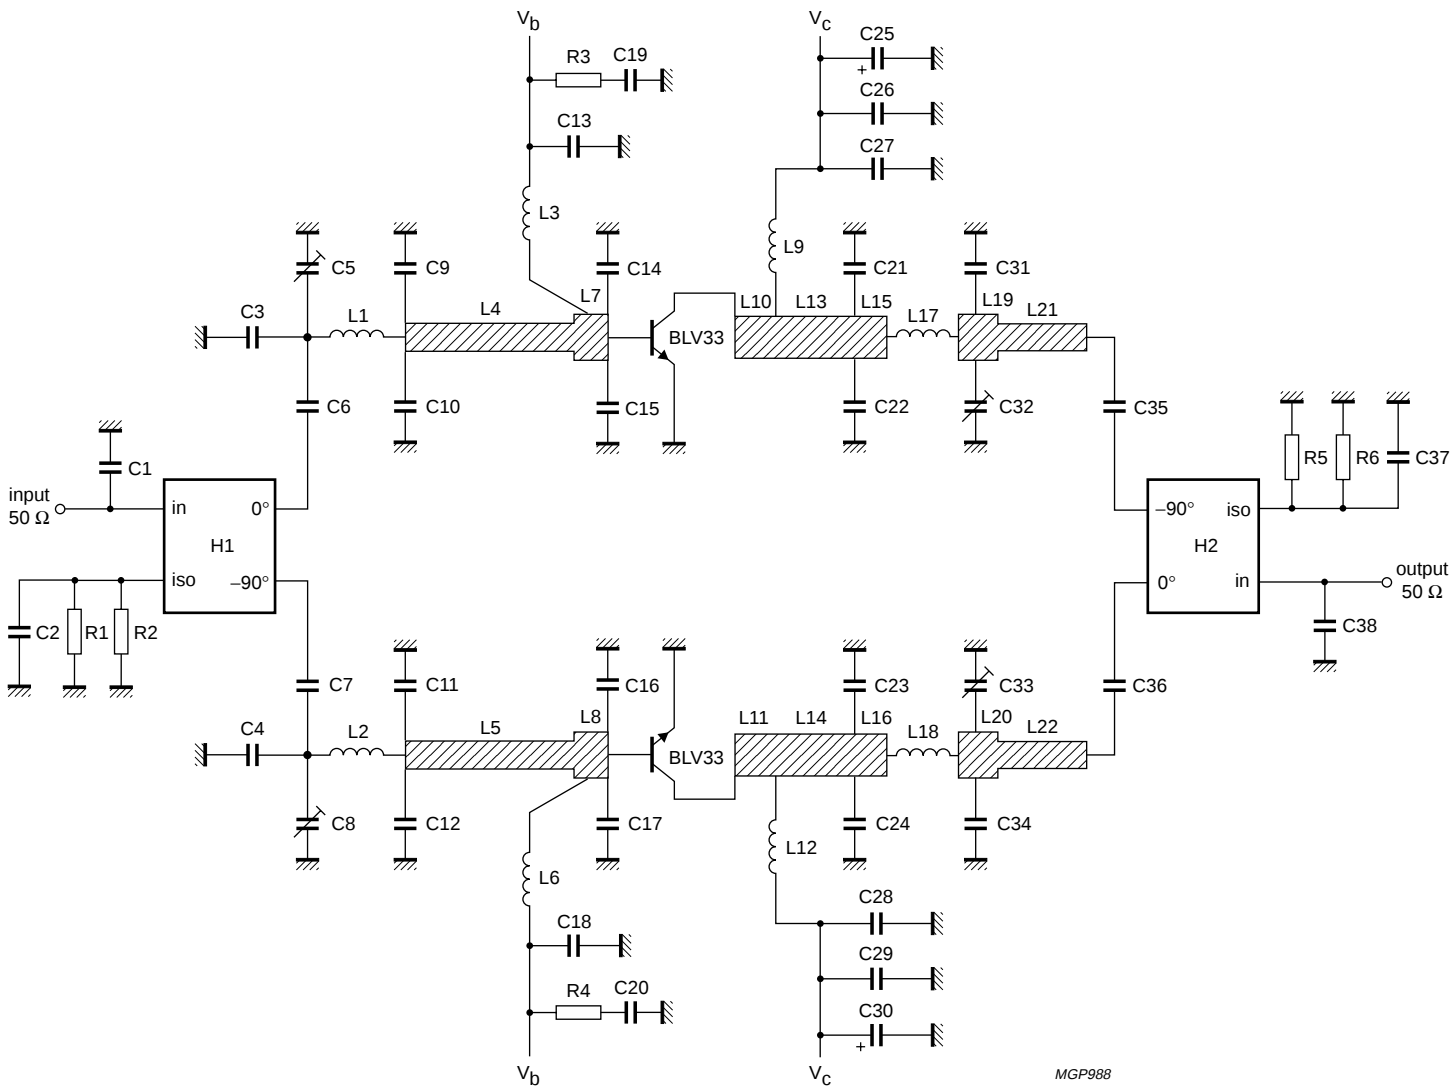


Fig.1 Band III Class A linear power amplifier (170 – 230 MHz).

A wide-band class-A linear power amplifier (174 – 230 MHz) with two transistors BLV33

Application Note ECO7904

Table 4

Parts list: Band III class A linear power amplifier (170 – 230 MHz)

C1 = C38	1.5 pF	chip capacitor
C2 = C3 = C4 = C37	5.6 pF	chip capacitor
C5 = C8 = C32 = C33	1.8 to 10 pF	film dielectric trimmer (cat. no. 222280905002)
C6 = C7 = C35 = C36	220 pF	chip capacitor
C9 = C10 = C11 = C12	18 pF	chip capacitor
C13 = C18 = C27 = C28	1000 pF	chip capacitor
C14 = C15 = C16 = C17	100 pF	chip capacitor
C19 = C20 = C26 = C29	330 nF	metallized film capacitor (cat. no. 222235225334)
C21 = C23	68 pF	chip capacitor
C22 = C24	56 pF	chip capacitor
C25 = C30	10 μ F (40 V)	electrolytic capacitor (cat. no. 222212117109)
C31 = C34	22 pF	chip capacitor (chip capacitors: ATC type 100B – C – MSX – 500)
R1 = R2 = R5 = R6	100 Ω	power metal film resistor, PR52 type (cat. no. 232219231001)
R3 = R4	10 Ω	carbon resistor, CR68 type (cat. no. 23222141309)
H1 = H2	3 dB –90°	coupler model no. 10262 –3, range 125 – 250 MHz, Anaren Microwave Inc.
L1 = L2	25 nH	2 turns enamelled Cu wire (1 mm); int. diam. 5 mm; length 5 mm; leads 2 $\times$ 3 mm
L3 = L6	90 nH	5 turns closely wound enamelled Cu wire (1 mm); int. diam. 4.5 mm; leads 2 $\times$ 9 mm
L4 = L5		60 Ω stripline; w = 2 mm; l = 30 mm
L7 = L8		30 Ω stripline; w = 6 mm; l = 11 mm
L9 = L12	20 nH	Cu strip (1 mm); l = 17 mm; h = 5 mm; w = 4 mm
L10 = L11		30 Ω stripline; w = 6 mm; l = 8 mm
L13 = L14		30 Ω stripline; w = 6 mm; l = 14 mm
L15 = L16		30 Ω stripline; w = 6 mm; l = 4 mm
L17 = L18	22 nH	2 turns closely wound Cu wire (1.5 mm); int. diam. 4.5 mm; leads 2 $\times$ 3 mm
L19 = L20		30 Ω stripline; w = 6 mm; l = 6 mm
L21 = L22		50 Ω stripline; w = 3 mm; l = 15 mm

The striplines are printed on double Cu-clad printed circuit board with epoxy fibre-glass dielectric ($\epsilon_r = 4.5$); thickness 1/16 inch.

A wide-band class-A linear power amplifier
(174 – 230 MHz) with two transistors BLV33

Application Note
ECO7904

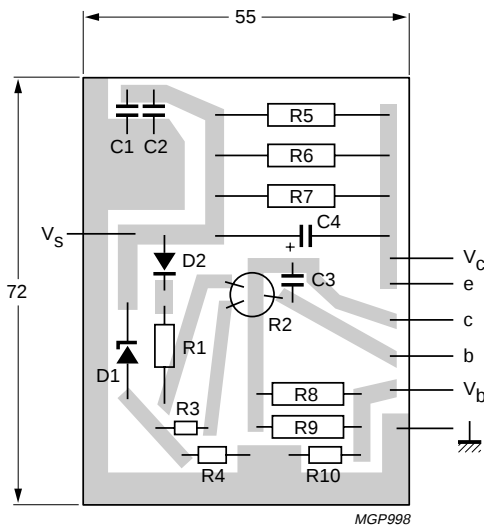
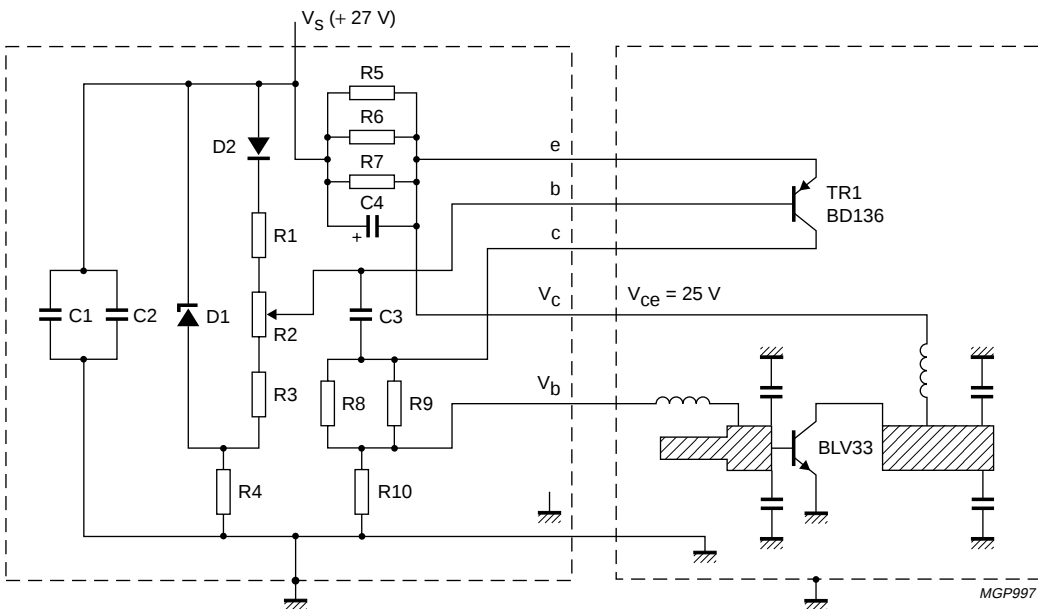


Fig.2 Class A bias circuit for a single transistor BLV33.

**A wide-band class-A linear power amplifier
(174 – 230 MHz) with two transistors BLV33**

**Application Note
ECO7904****Table 5**

Parts list: Class A bias circuit for a single transistor BLV33

R1	150 Ω	carbon resistor CR25 type
R2	100 Ω	preset potentiometer CTP10 type
R3	10 Ω	carbon resistor CR25 type
R4	1000 Ω	carbon resistor CR25 type
R5 = R6 = R7	1.8 Ω	rectangular wirewound resistor EH707 type
R8 = R9	180 Ω	carbon resistor CR25 type
R10	33 Ω	carbon resistor CR25 type
C1 = C3	100 nF	metallized film capacitor
C2	100 pF	ceramic capacitor
C4	10 μ F	40 V electrolytic capacitor
D1	BZY 88 (3V3)	
D2	BY 206	
T1	BD 136	

A wide-band class-A linear power amplifier
(174 – 230 MHz) with two transistors BLV33

Application Note
ECO7904



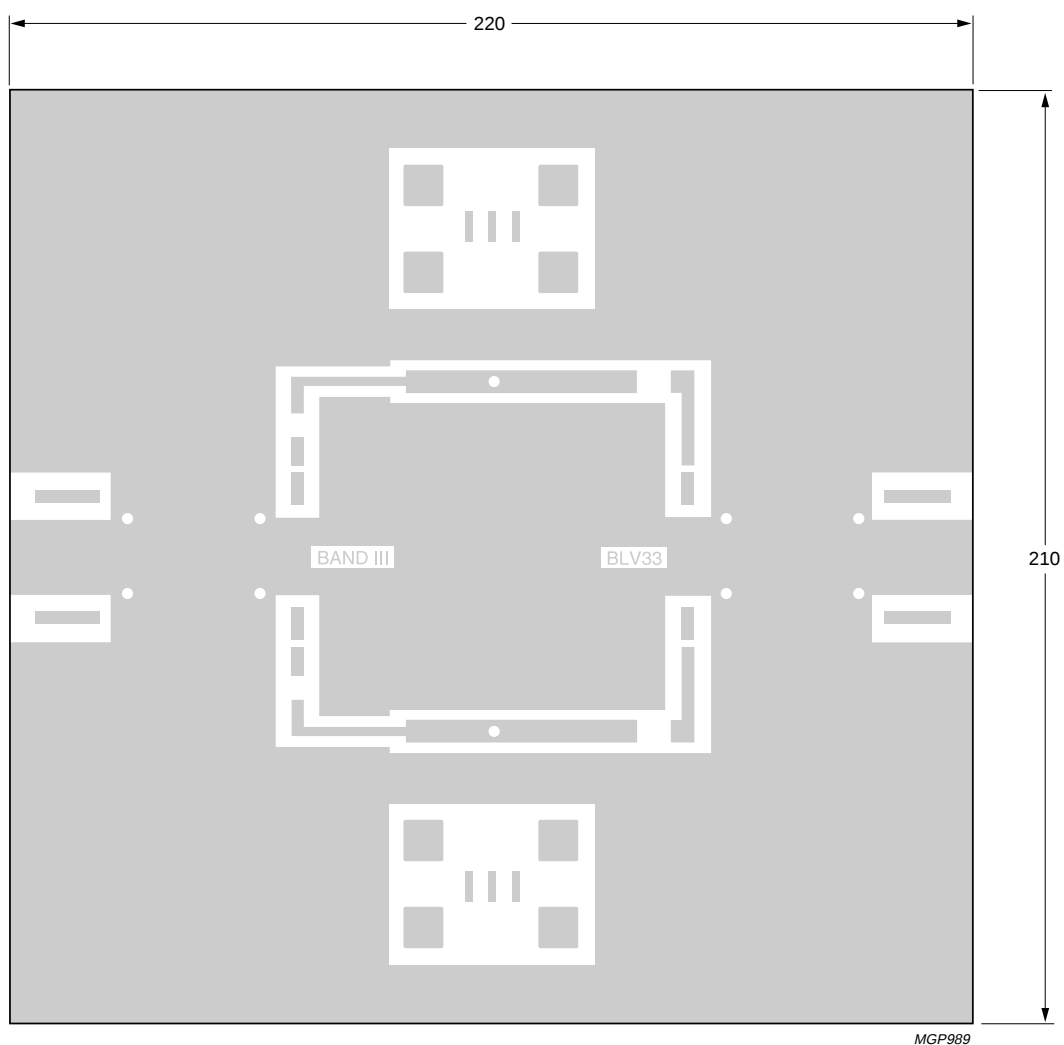


Fig.3 P.C. Board and 2× BLV33 amplifier lay-out.

A wide-band class-A linear power amplifier (174 – 230 MHz) with two transistors BLV33

Application Note ECO7904

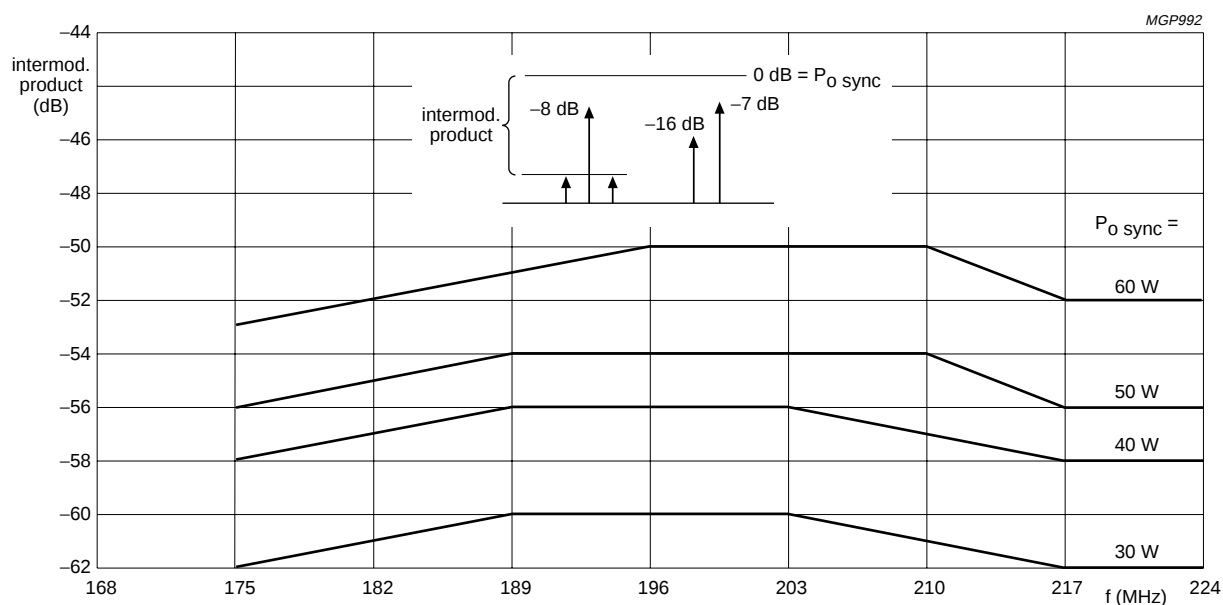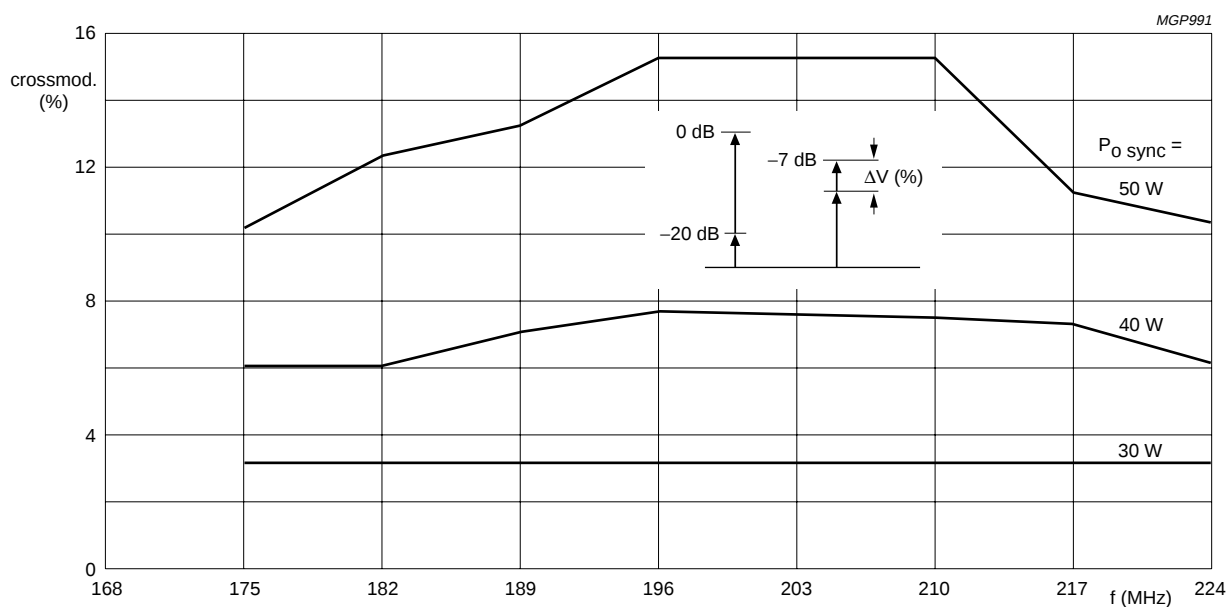


Vision carrier level: -20 dB/0 dB.
Sound carrier level: -7 dB.
Sync level: 0 dB.


Fig.4 Crossmodulation and intermodulation products of the 2× BLV33 wideband Band III power amplifier.

A wide-band class-A linear power amplifier
(174 – 230 MHz) with two transistors BLV33

Application Note
ECO7904

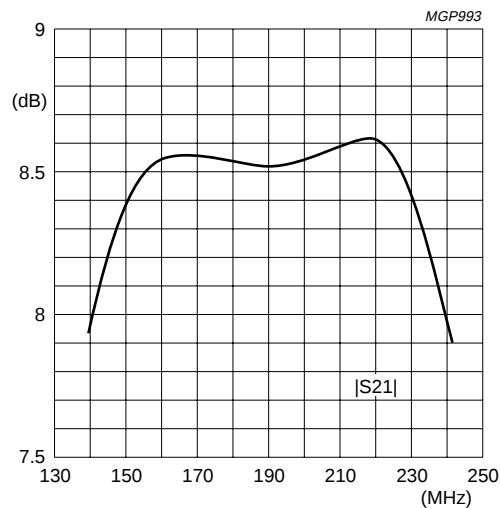

a. Forward transducer gain.

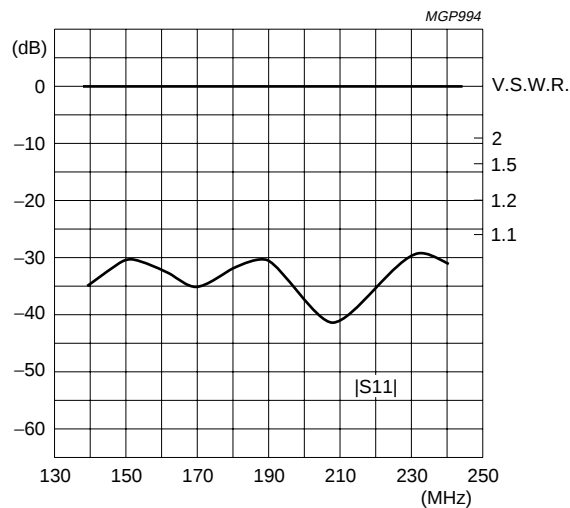


b. Input voltage standing wave ratio.


Fig.5 2× BLV33 wideband Band III power amplifier.

A wide-band class-A linear power amplifier
(174 – 230 MHz) with two transistors BLV33

Application Note
ECO7904

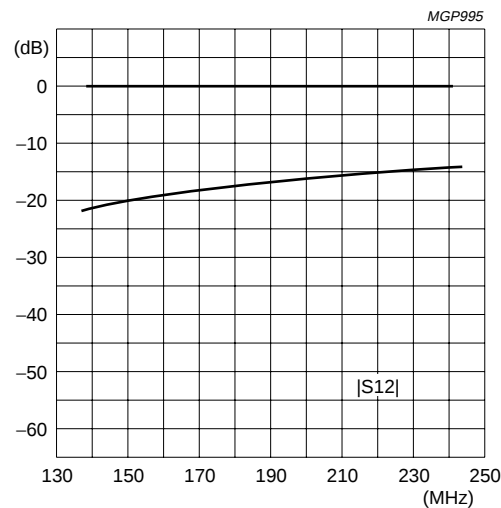

a. Reverse transducer gain.

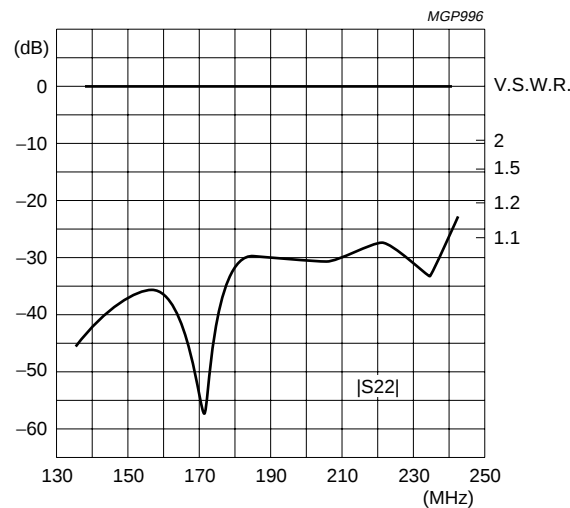

b. Output voltage standing wave ratio.

Fig.6 2× BLV33 wideband Band III power amplifier.

A wide-band class-A linear power amplifier
(174 – 230 MHz) with two transistors BLV33

Application Note
ECO7904

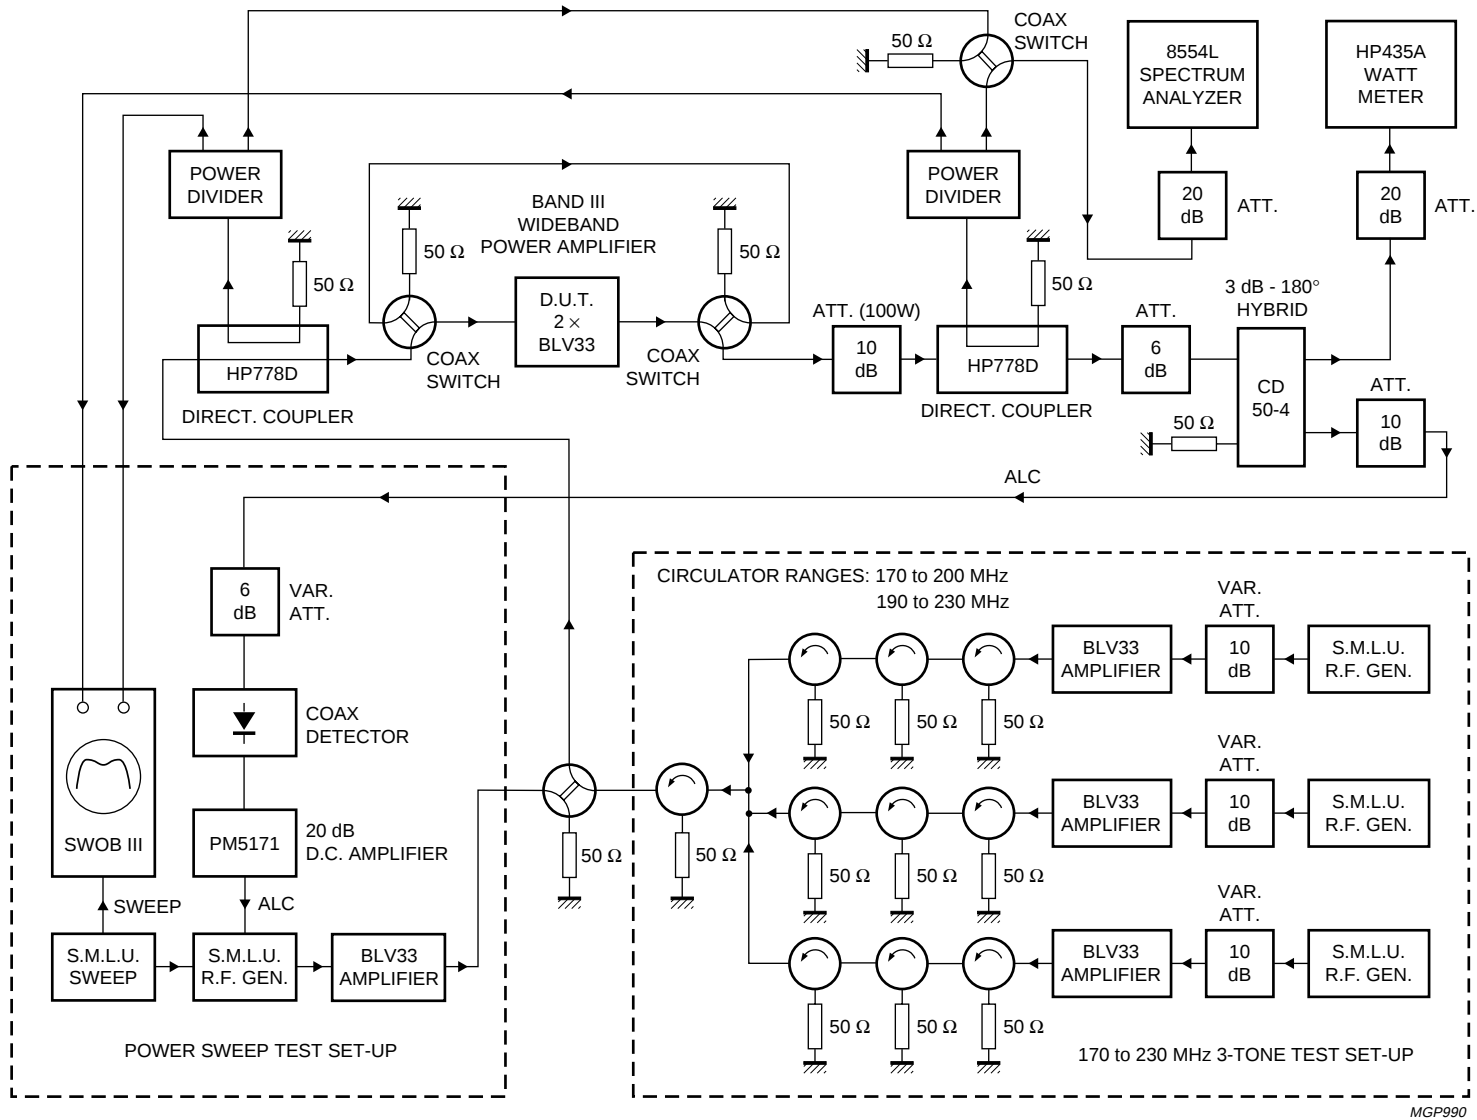


Fig.7 Test set up 2x BLV33 Band III power amplifier.

Philips Semiconductors – a worldwide company

Argentina: see South America

Australia: 34 Waterloo Road, NORTH RYDE, NSW 2113,
Tel. +61 2 9805 4455, Fax. +61 2 9805 4466

Austria: Computerstr. 6, A-1101 WIEN, P.O. Box 213, Tel. +43 160 1010,
Fax. +43 160 101 1210

Belarus: Hotel Minsk Business Center, Bld. 3, r. 1211, Volodarski Str. 6,
220050 MINSK, Tel. +375 172 200 733, Fax. +375 172 200 773

Belgium: see The Netherlands

Brazil: see South America

Bulgaria: Philips Bulgaria Ltd., Energoproject, 15th floor,
51 James Bourchier Blvd., 1407 SOFIA,
Tel. +359 2 689 211, Fax. +359 2 689 102

Canada: PHILIPS SEMICONDUCTORS/COMPONENTS,
Tel. +1 800 234 7381

China/Hong Kong: 501 Hong Kong Industrial Technology Centre,
72 Tat Chee Avenue, Kowloon Tong, HONG KONG,
Tel. +852 2319 7888, Fax. +852 2319 7700

Colombia: see South America

Czech Republic: see Austria

Denmark: Prags Boulevard 80, PB 1919, DK-2300 COPENHAGEN S,
Tel. +45 32 88 2636, Fax. +45 31 57 0044

Finland: Sinikalliontie 3, FIN-02630 ESPOO,
Tel. +358 9 615800, Fax. +358 9 61580920

France: 51 Rue Carnot, BP317, 92156 SURESNES Cedex,
Tel. +33 1 40 99 6161, Fax. +33 1 40 99 6427

Germany: Hammerbrookstraße 69, D-20097 HAMBURG,
Tel. +49 40 23 53 60, Fax. +49 40 23 536 300

Greece: No. 15, 25th March Street, GR 17778 TAVROS/ATHENS,
Tel. +30 1 4894 339/239, Fax. +30 1 4814 240

Hungary: see Austria

India: Philips INDIA Ltd, Band Box Building, 2nd floor,
254-D, Dr. Annie Besant Road, Worli, MUMBAI 400 025,
Tel. +91 22 493 8541, Fax. +91 22 493 0966

Indonesia: see Singapore

Ireland: Newstead, Clonskeagh, DUBLIN 14,
Tel. +353 1 7640 000, Fax. +353 1 7640 200

Israel: RAPAC Electronics, 7 Kehilat Saloniki St, PO Box 18053,
TEL AVIV 61180, Tel. +972 3 645 0444, Fax. +972 3 649 1007

Italy: PHILIPS SEMICONDUCTORS, Piazza IV Novembre 3,
20124 MILANO, Tel. +39 2 6752 2531, Fax. +39 2 6752 2557

Japan: Philips Bldg 13-37, Kohnan 2-chome, Minato-ku, TOKYO 108,
Tel. +81 3 3740 5130, Fax. +81 3 3740 5077

Korea: Philips House, 260-199 Itaewon-dong, Yongsan-ku, SEOUL,
Tel. +82 2 709 1412, Fax. +82 2 709 1415

Malaysia: No. 76 Jalan Universiti, 46200 PETALING JAYA, SELANGOR,
Tel. +60 3 750 5214, Fax. +60 3 757 4880

Mexico: 5900 Gateway East, Suite 200, EL PASO, TEXAS 79905,
Tel. +9-5 800 234 7381

Middle East: see Italy

Netherlands: Postbus 90050, 5600 PB EINDHOVEN, Bldg. VB,
Tel. +31 40 27 82785, Fax. +31 40 27 88399

New Zealand: 2 Wagener Place, C.P.O. Box 1041, AUCKLAND,
Tel. +64 9 849 4160, Fax. +64 9 849 7811

Norway: Box 1, Manglerud 0612, OSLO,
Tel. +47 22 74 8000, Fax. +47 22 74 8341

Philippines: Philips Semiconductors Philippines Inc.,
106 Valero St. Salcedo Village, P.O. Box 2108 MCC, MAKATI,
Metro MANILA, Tel. +63 2 816 6380, Fax. +63 2 817 3474

Poland: Ul. Lukiska 10, PL 04-123 WARSZAWA,
Tel. +48 22 612 2831, Fax. +48 22 612 2327

Portugal: see Spain

Romania: see Italy

Russia: Philips Russia, Ul. Usatcheva 35A, 119048 MOSCOW,
Tel. +7 095 755 6918, Fax. +7 095 755 6919

Singapore: Lorong 1, Toa Payoh, SINGAPORE 1231,
Tel. +65 350 2538, Fax. +65 251 6500

Slovakia: see Austria

Slovenia: see Italy

South Africa: S.A. PHILIPS Pty Ltd., 195-215 Main Road Martindale,
2092 JOHANNESBURG, P.O. Box 7430 Johannesburg 2000,
Tel. +27 11 470 5911, Fax. +27 11 470 5494

South America: Al. Vicente Pinzon, 173, 6th floor,
04547-130 SÃO PAULO, SP, Brazil,
Tel. +55 11 821 2333, Fax. +55 11 821 2382

Spain: Balmes 22, 08007 BARCELONA,
Tel. +34 3 301 6312, Fax. +34 3 301 4107

Sweden: Kottbygatan 7, Akalla, S-16485 STOCKHOLM,
Tel. +46 8 632 2000, Fax. +46 8 632 2745

Switzerland: Allmendstrasse 140, CH-8027 ZÜRICH,
Tel. +41 1 488 2686, Fax. +41 1 488 3263

Taiwan: Philips Semiconductors, 6F, No. 96, Chien Kuo N. Rd., Sec. 1,
TAIPEI, Taiwan Tel. +886 2 2134 2865, Fax. +886 2 2134 2874

Thailand: PHILIPS ELECTRONICS (THAILAND) Ltd.,
209/2 Sanpavuth-Bangna Road Prakanong, BANGKOK 10260,
Tel. +66 2 745 4090, Fax. +66 2 398 0793

Turkey: Talatpasa Cad. No. 5, 80640 GÜLTEPE/ISTANBUL,
Tel. +90 212 279 2770, Fax. +90 212 282 6707

Ukraine: PHILIPS UKRAINE, 4 Patrice Lumumba str., Building B, Floor 7,
252042 KIEV, Tel. +380 44 264 2776, Fax. +380 44 268 0461

United Kingdom: Philips Semiconductors Ltd., 276 Bath Road, Hayes,
MIDDLESEX UB3 5BX, Tel. +44 181 730 5000, Fax. +44 181 754 8421

United States: 811 East Arques Avenue, SUNNYVALE, CA 94088-3409,
Tel. +1 800 234 7381

Uruguay: see South America

Vietnam: see Singapore

Yugoslavia: PHILIPS, Trg N. Pasica 5/v, 11000 BEOGRAD,
Tel. +381 11 625 344, Fax. +381 11 635 777

For all other countries apply to: Philips Semiconductors,
International Marketing & Sales Communications, Building BE-p, P.O. Box 218,
5600 MD EINDHOVEN, The Netherlands, Fax. +31 40 27 24825

Internet: <http://www.semiconductors.philips.com>

© Philips Electronics N.V. 1998

SCA57

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

Date of release: 1998 Mar 23

Let's make things better.

**Philips
Semiconductors**



PHILIPS