

**SANYO**

Monolithic Linear IC

## HIGH-PERFORMANCE QUAD OPERATIONAL AMP

The LA6324 consists of four independent, high-performance, internally phase compensated operational amplifiers that are designed to operate from a single power supply over a wide range of voltages. These four operational amplifiers are packaged in a single package. As in case of conventional general-purpose operational amplifiers, operation from dual power supplies is also possible and the power dissipation is low.

It can be applied to various uses in commercial and industrial equipment including all types of transducer amplifiers, DC amplifiers.

## FEATURES

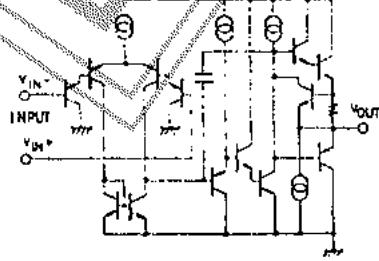
- Phase compensation not required.
- Wide operation power supply voltage: 3.0 ~ 30.0 V (single supply)  
 $\pm 1.5 \sim \pm 15.0$  V (dual supplies)
- Input voltage includes the neighborhood of GND level; output voltage  $V_{out}$  is from 0 to  $V_{CC} - 1.5$  V.
- Low current dissipation;  $I_{CC} = 0.6$  mA typ/ $R_L = \infty$

MAXIMUM RATINGS/ $T_a = 25^\circ\text{C}$ 

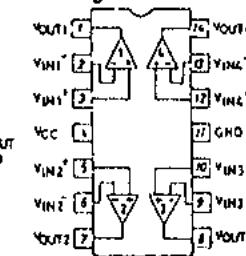
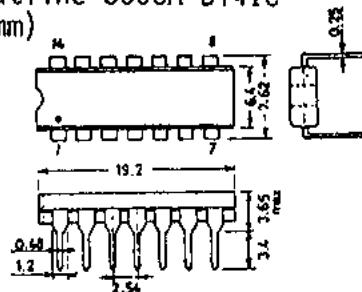
		Unit
Maximum supply voltage	$V_{CC}$	32 V
Differential input voltage	$V_{ID}$	32 V
Maximum input voltage	$V_{IN}$ max	-0.3 ~ +32 V
Allowable power dissipation	$P_d$ max	720 mW
Operating temperature	$T_{opg}$	-30 ~ +85 °C
Storage temperature	$T_{stg}$	-55 ~ +125 °C

OPERATING CHARACTERISTICS/ $T_a = 25^\circ\text{C}$ ,  $V_{CC} = +5$  V

	Test circuit	min	typ	max	unit
Input offset voltage	$V_{IO}$	1		$\pm 2$	$\pm 7$ mV
Input offset current	$I_{IO}$	2		$\pm 5$	$\pm 50$ nA
Input bias current	$I_B$	3		45	250 nA
Common-mode input voltage range	$V_{ICM}$	4	0	$V_{CC} - 1.5$	V
Common-mode rejection ratio	CMR	4	65	80	dB
Large amplitude voltage gain	$V_G$	$V_{CC} = 15$ V, $R_L \geq 2$ kΩ	5	25	100 V/mV
Output voltage range	$V_{OUT}$		0	$V_{CC} - 1.5$	V
Power supply rejection ratio	SVR	6	65	100	dB
Channel separation		7		120	dB
Current dissipation	$I_{CC}$	8	0.6	2	mA
	$I_{CC}$ $V_{CC} = 30$ V			1.5	3 mA
Output current (source)	$I_O$ source $V_{IN+} = 1$ V, $V_{IN-} = 0$ V	9	20	40	mA
Output current (sink)	$I_O$ sink $V_{IN+} = 0$ V, $V_{IN-} = 1$ V	10	10	20	mA

Equivalent circuit  
(1 unit)

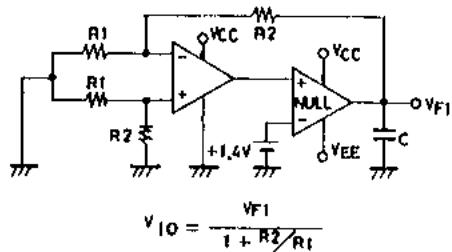
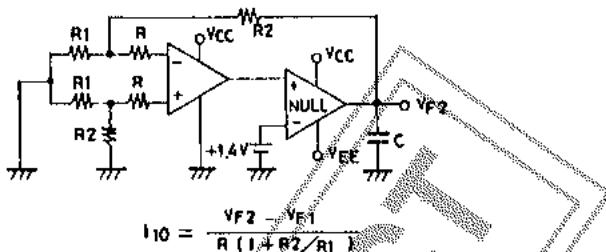
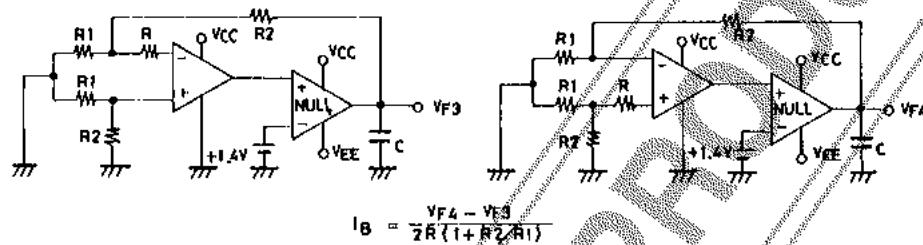
## Pin Assignment

Case Outline 3003A-D14IC  
(unit:mm)

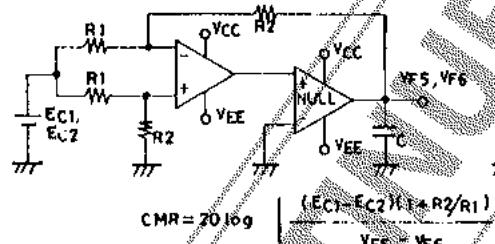
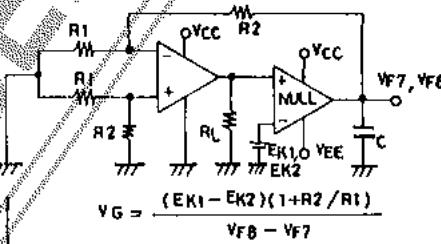
Specifications and information herein are subject to change without notice.

**SANYO Electric Co.,Ltd. Semiconductor Overseas Marketing Div.**  
Natsume Bldg., 18-6, 2-chome, Yushima, Bunkyo-ku, TOKYO 113 JAPAN

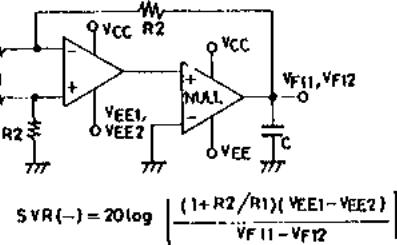
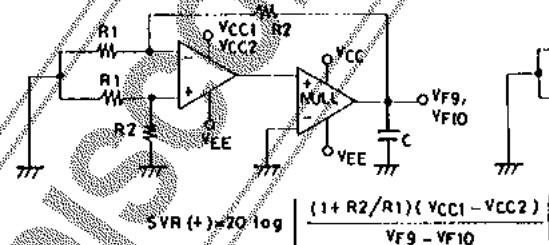
## Test Circuits

1 Input offset voltage  $V_{IO}$ 2 Input offset current  $I_{IO}$ 3 Input bias current  $I_B$ 

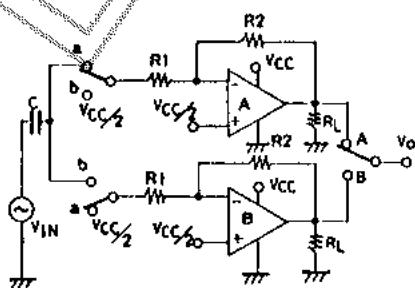
## 4 Common-mode rejection ratio CMR

Common-mode input voltage range  $V_{ICM}$ 5 Voltage gain  $V_G$ 

## 6 Power supply rejection ratio SVR



## 7 Channel separation CS



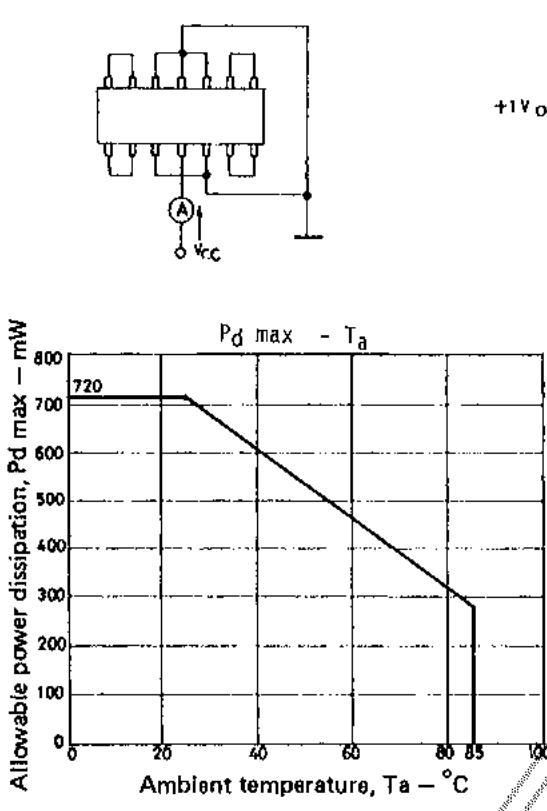
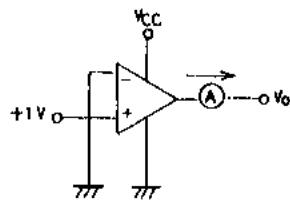
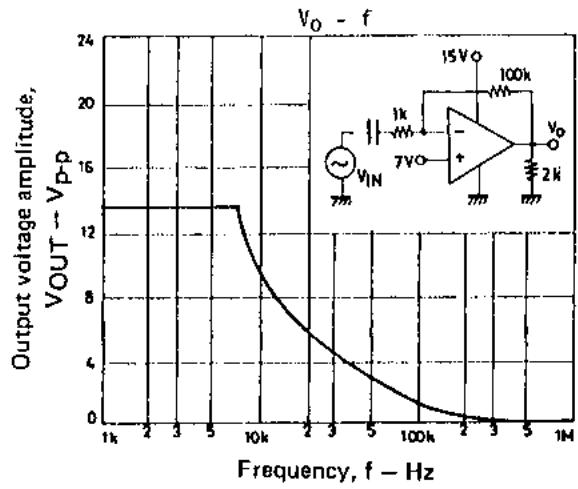
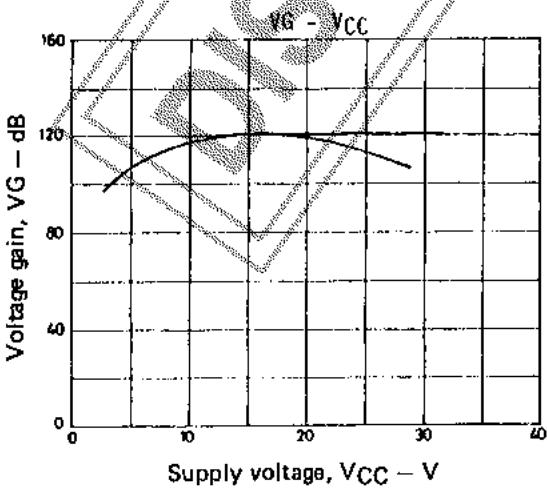
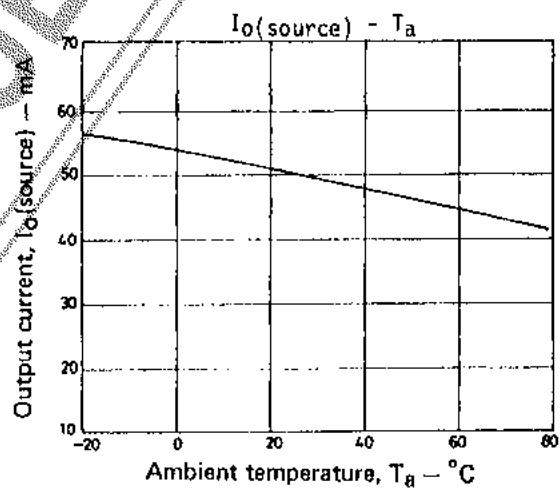
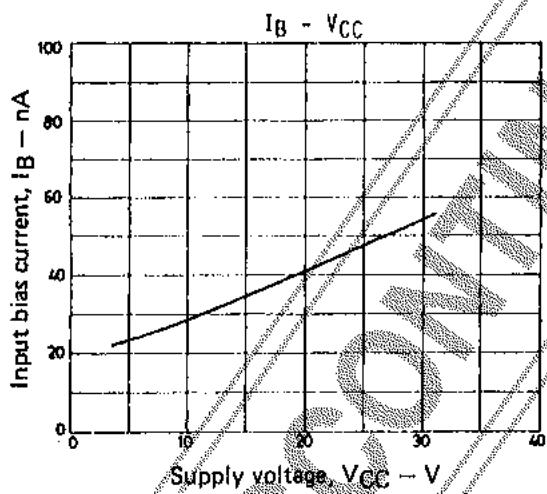
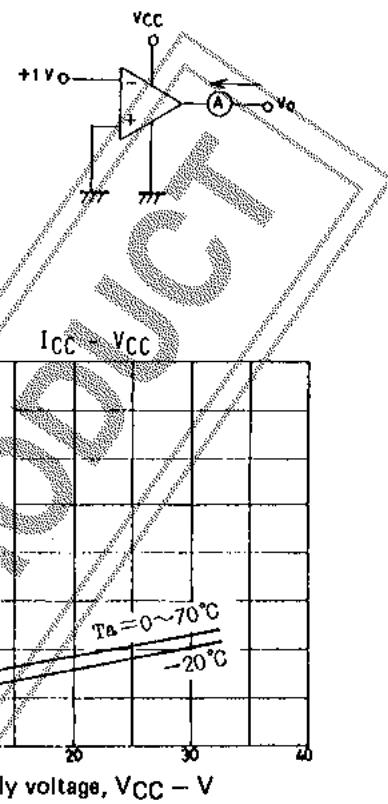
SW: a

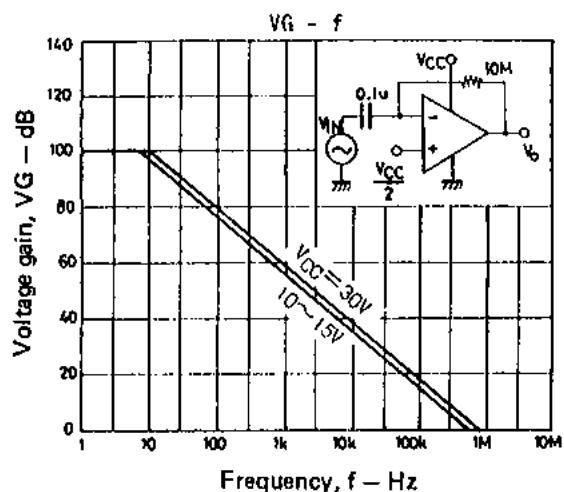
$$CS(A \rightarrow B) = 20 \log \frac{R_2 \cdot V_{OA}}{R_1 \cdot V_{OB}}$$

SW: b

$$CS(B \rightarrow A) = 20 \log \frac{R_2 \cdot V_{OB}}{R_1 \cdot V_{OA}}$$

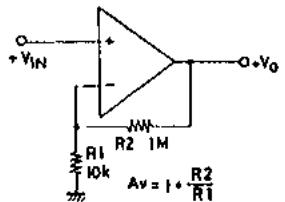
These apply also to other channels.

8 Current dissipation  $I_{CC}$ 9 Output current  $I_O$  source10 Output current  $I_O$  sink

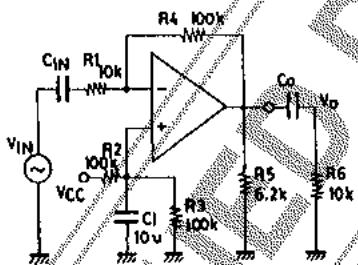


### Sample Application Circuits

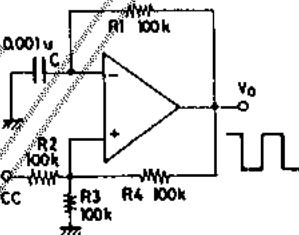
Non-inverting DC amplifier



Inverting AC amplifier



Square wave oscillator



Information furnished by SANYO is believed to be accurate and reliable. However, no responsibility is assumed by SANYO for its use; nor for any infringements of patents or other rights of third parties which may result from its use, and no license is granted by implication or otherwise under any patent or patent rights of SANYO.