

3V recording / playback system preamplifier

BA3410AF

The BA3410AF is a playback/recording system preamplifier for mono tape recorders. It operates off a 3V supply. The BA3410AF includes playback equalizer, mic, line, and recording amplifiers, an ALC circuit, and a playback/recording control circuit. This construction allows switching between recording and playback modes with a single contact switch, for smaller and simpler PCB designs. When combined with a BTL power amplifier, almost all of the functions required for a 3V personal-memo or dictation tape recorder are provided, allowing compact set designs.


● Applications

3V personal-memo tape recorders

● Features

- 1) Internal recording/playback mode switch requires just a single contact switch.
- 2) Recording monitoring is possible.
- 3) Direct-head coupling is possible for playback.
- 4) Low power consumption (recording : 4.8mA, playback : 3.8mA)
- 5) 16-pin SOP package allows compact set designs.

● Block diagram

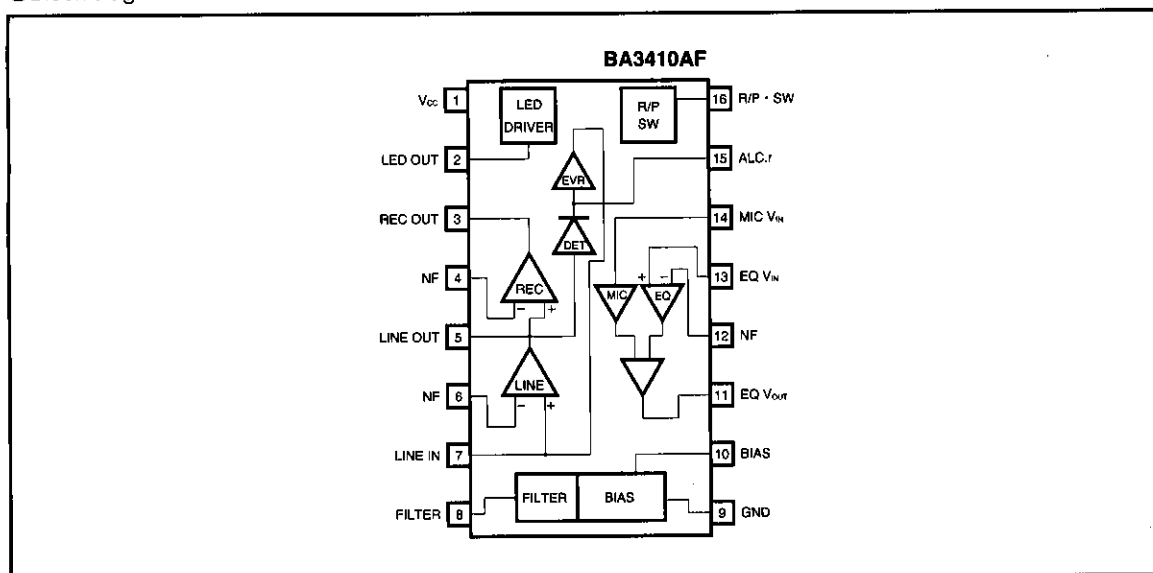

● Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Limits	Unit
Supply voltage	V _{CC}	4.0	V
Power dissipation	P _d	500*	mW
Operating temperature	T _{opr}	−20~75	°C
Storage temperature	T _{stg}	−40~125	°C

* When mounted on a 50mm x 50mm x 1.6mm glass-epoxy PCB. Reduced by 5.0mW for each increase in Ta of 1°C over 25°C.

● Recommended operating conditions (Ta = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Supply voltage	V _{CC}	1.8	3	3.5	V

● Electrical characteristics (unless otherwise specified Ta = 25°C, V_{CC} = 3V and f = 1kHz)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Recording quiescent current	I _Q R.	2.3	4.8	7.2	mA	V _{IN} = 0V _{rms}
Playback quiescent current	I _Q P.	1.8	3.8	6.2	mA	V _{IN} = 0V _{rms}
Open-circuit voltage gain (1)	G _{VO} —EQ	59	70	—	dB	V _{IN} = −90dBV
Closed-circuit voltage gain (2)	G _{VC} —EL	40	44	48	dB	V _{IN} = −64dBV
Closed-circuit voltage gain (3)	G _{VC} —ML	47	50	53	dB	V _{IN} = −75dBV
Closed-circuit voltage gain (4)	G _{VC} —MR	60	64	67	dB	V _{IN} = −80dBV
Maximum output voltage	V _{OM} —R	400	500	—	mV _{rms}	THD = 1%
Distortion (1)	THD—EL	—	0.1	0.7	%	V _{IN} = −54dBV
Distortion (2)	THD—MR	—	0.4	1.5	%	V _{IN} = −60dBV
Distortion (3)	THD—MR	—	0.3	1.5	%	V _{IN} = −32dBV
LED output current (1)	I _{OL} —P1	20	50	—	μA	V _{CC} = 2.3V
LED output current (2)	I _{OL} —P2	—	0	10	μA	V _{CC} = 1.7V
Input conversion-noise voltage (1)	V _{NIN} PL	—	1.2	2.0	μV _{rms}	R _g = 2.2kΩ, BPF = 20~20kHz
Input conversion-noise voltage (2)	V _{NIN} RL	—	1.4	2.0	μV _{rms}	R _g = 2.2kΩ, BPF = 20~20kHz

Preamplifiers

Low-frequency amplifiers

● Measurement circuit

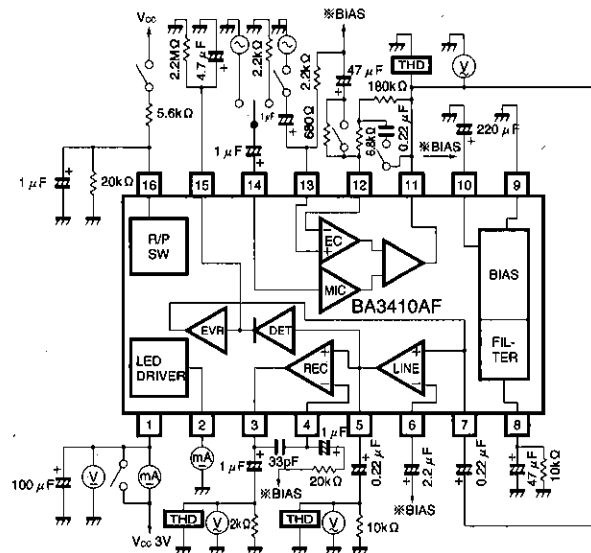


Fig. 1

● Electrical characteristics curves

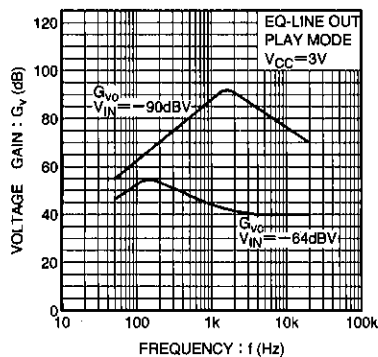


Fig. 2 Voltage gain vs. frequency

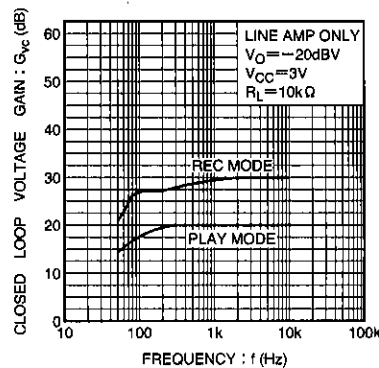


Fig. 3 Voltage gain vs. frequency

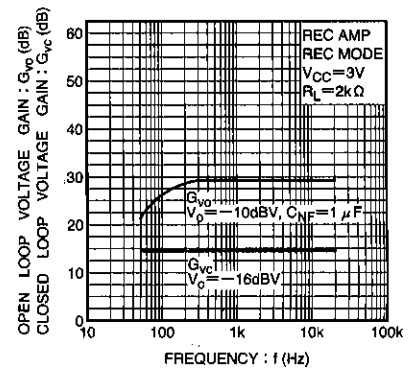


Fig. 4 Voltage gain vs. frequency

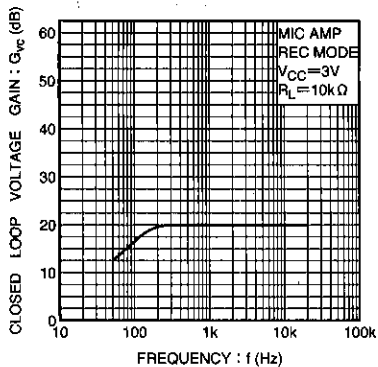


Fig. 5 Voltage gain vs. frequency

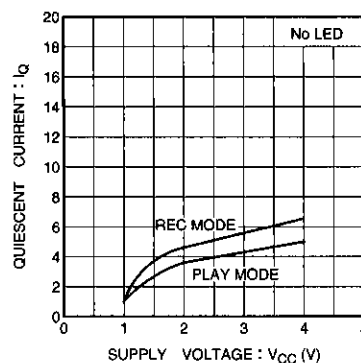


Fig. 6 Quiescent current vs. supply voltage







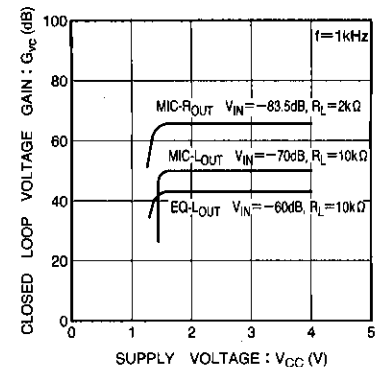


Fig. 7 Voltage gain vs. supply voltage

●Electrical characteristics curves

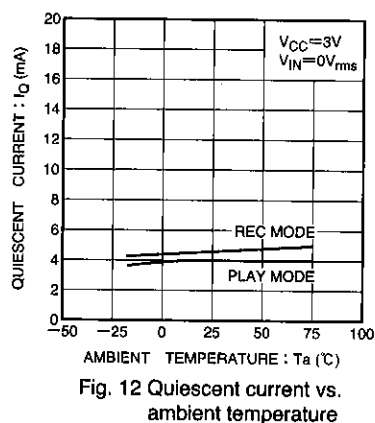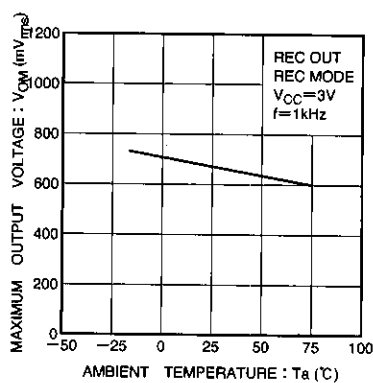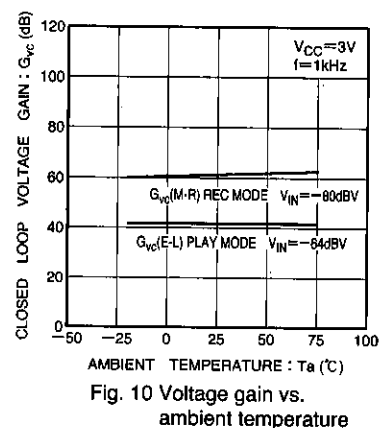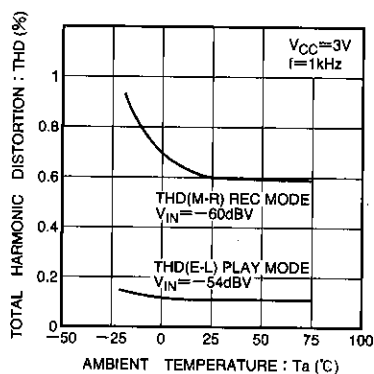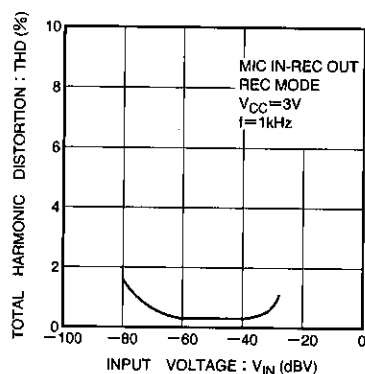

●External dimensions (Unit: mm)

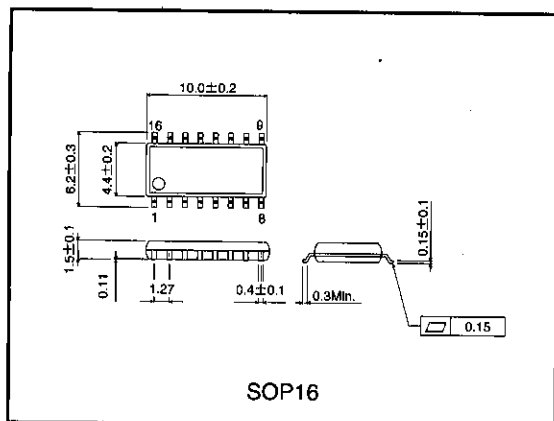

Preamplifiers

Low-frequency amplifiers

Notes

- The contents described in this catalogue are correct as of March 1997.
- No unauthorized transmission or reproduction of this book, either in whole or in part, is permitted.
- The contents of this book are subject to change without notice. Always verify before use that the contents are the latest specifications. If, by any chance, a defect should arise in the equipment as a result of use without verification of the specifications, ROHM CO., LTD., can bear no responsibility whatsoever.
- Application circuit diagrams and circuit constants contained in this data book are shown as examples of standard use and operation. When designing for mass production, please pay careful attention to peripheral conditions.
- Any and all data, including, but not limited to application circuit diagrams, information, and various data, described in this catalogue are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO., LTD., disclaims any warranty that any use of such device shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes absolutely no liability in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices; other than for the buyer's right to use such devices itself, resell or otherwise dispose of the same; no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by ROHM CO., LTD., is granted to any such buyer.
- The products in this manual are manufactured with silicon as the main material.
- The products in this manual are not of radiation resistant design.

The products listed in this catalogue are designed to be used with ordinary electronic equipment or devices (such as audio-visual equipment, office-automation equipment, communications devices, electrical appliances, and electronic toys). Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers, or other safety devices) please be sure to consult with our sales representatives in advance.

- Notes when exporting
 - It is essential to obtain export permission when exporting any of the above products when it falls under the category of strategic material (or labor) as determined by foreign exchange or foreign trade control laws.
 - Please be sure to consult with our sales representatives to ascertain whether any product is classified as a strategic material.