## **Features**

- High Performance, Low Power AVR® 8-Bit Microcontroller
- Advanced RISC Architecture
  - 130 Powerful Instructions Most Single Clock Cycle Execution
  - 32 x 8 General Purpose Working Registers
  - Fully Static Operation
  - Up to 16 MIPS Throughput at 16 MHz
  - On-Chip 2-cycle Multiplier
- High Endurance Non-volatile Memory segments
  - 16K Bytes of In-System Self-programmable Flash program memory
  - 512 Bytes EEPROM
  - 1K Bytes Internal SRAM
  - Write/Erase cycles: 10,000 Flash/100,000 EEPROM
  - Data retention: 20 years at 85°C/100 years at 25°C<sup>(1)</sup>
  - Optional Boot Code Section with Independent Lock Bits In-System Programming by On-chip Boot Program True Read-While-Write Operation
  - Programming Lock for Software Security
- JTAG (IEEE std. 1149.1 compliant) Interface
  - Boundary-scan Capabilities According to the JTAG Standard
  - Extensive On-chip Debug Support
  - Programming of Flash, EEPROM, Fuses, and Lock Bits through the JTAG Interface
- Peripheral Features
  - Two 8-bit Timer/Counters with Separate Prescaler and Compare Mode
  - One 16-bit Timer/Counter with Separate Prescaler, Compare Mode, and Capture Mode
  - Real Time Counter with Separate Oscillator
  - Four PWM Channels
  - 8-channel, 10-bit ADC
  - Programmable Serial USART
  - Master/Slave SPI Serial Interface
  - Universal Serial Interface with Start Condition Detector
  - Programmable Watchdog Timer with Separate On-chip Oscillator
  - On-chip Analog Comparator
  - Interrupt and Wake-up on Pin Change
- Special Microcontroller Features
  - Power-on Reset and Programmable Brown-out Detection
  - Internal Calibrated Oscillator
  - External and Internal Interrupt Sources
  - Five Sleep Modes: Idle, ADC Noise Reduction, Power-save, Power-down, and Standby
- I/O and Packages
  - 54 Programmable I/O Lines
  - 64-lead TQFP, 64-pad QFN/MLF and 64-pad DRQFN
- Speed Grade:
  - ATmega165PA: 0 16 MHz @ 1.8 5.5V
- Temperature range:
  - -40°C to 85°C Industrial
- Ultra-Low Power Consumption
  - Active Mode:
    - 1 MHz, 1.8V: 215 µA
    - 32 kHz, 1.8V: 8 µA (including Oscillator)
  - Power-down Mode:
    - 0.1 µA at 1.8V
  - Power-save Mode:

0.6 μA at 1.8V (Including 32 kHz RTC)



8-bit AVR®
Microcontroller with 16K Bytes In-System
Programmable Flash

ATmega165PA

**Preliminary** 


**Summary** 



# 1. Pin Configurations

# 1.1 Pinout - TQFP and QFN/MLF

Figure 1-1. 64A (TQFP)and 64M1 (QFN/MLF) Pinout ATmega165PA

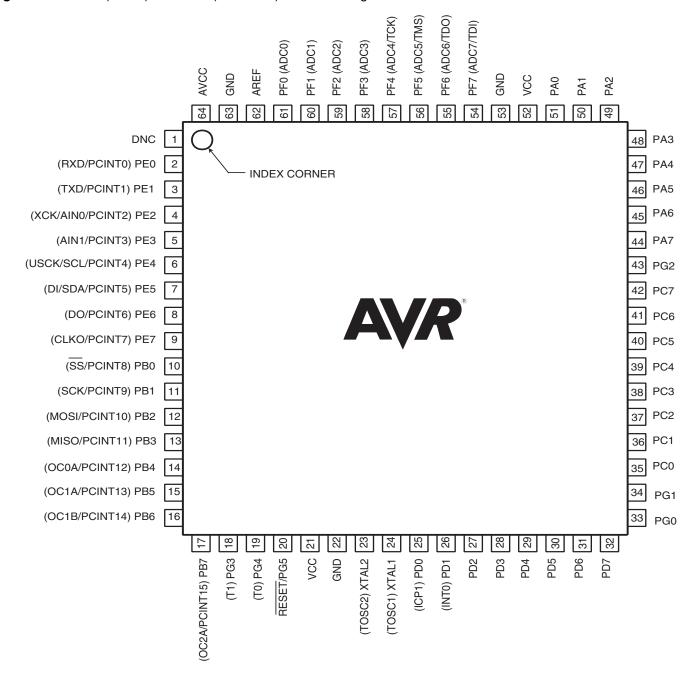

Note: The large center pad underneath the QFN/MLF packages is made of metal and internally connected to GND. It should be soldered or glued to the board to ensure good mechanical stability. If the center pad is left unconnected, the package might loosen from the board.




# 2. Overview

The ATmega165PA is a low-power CMOS 8-bit microcontroller based on the AVR enhanced RISC architecture. By executing powerful instructions in a single clock cycle, the ATmega165PA achieves throughputs approaching 1 MIPS per MHz allowing the system designer to optimize power consumption versus processing speed.

# 2.1 Block Diagram

Figure 2-1. Block Diagram

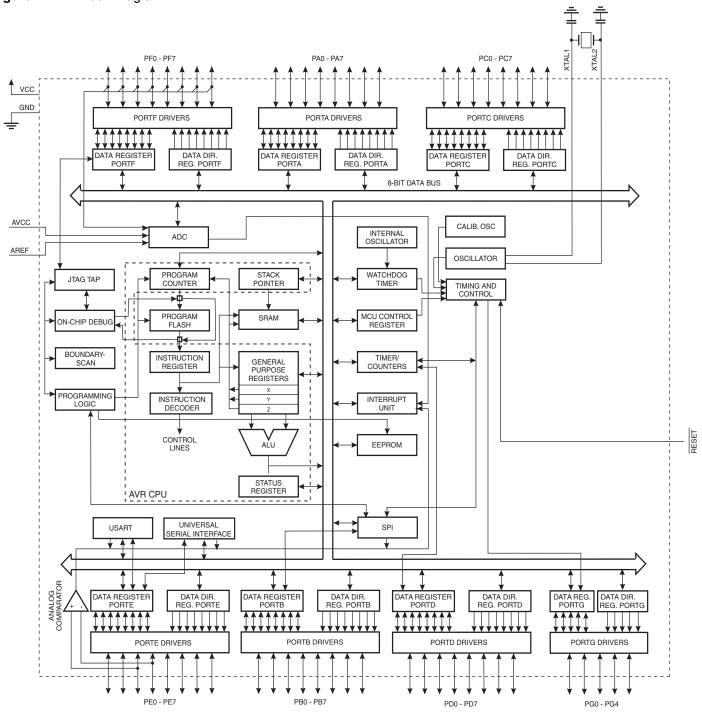



The AVR core combines a rich instruction set with 32 general purpose working registers. All the 32 registers are directly connected to the Arithmetic Logic Unit (ALU), allowing two independent registers to be accessed in one single instruction executed in one clock cycle. The resulting architecture is more code efficient while achieving throughputs up to ten times faster than conventional CISC microcontrollers.

The ATmega165PA provides the following features: 16K bytes of In-System Programmable Flash with Read-While-Write capabilities, 512 bytes EEPROM, 1K byte SRAM, 53 general purpose I/O lines, 32 general purpose working registers, a JTAG interface for Boundary-scan, Onchip Debugging support and programming, three flexible Timer/Counters with compare modes, internal and external interrupts, a serial programmable USART, Universal Serial Interface with Start Condition Detector, an 8-channel, 10-bit ADC, a programmable Watchdog Timer with internal Oscillator, an SPI serial port, and five software selectable power saving modes. The Idle mode stops the CPU while allowing the SRAM, Timer/Counters, SPI port, and interrupt system to continue functioning. The Power-down mode saves the register contents but freezes the Oscillator, disabling all other chip functions until the next interrupt or hardware reset. In Power-save mode, the asynchronous timer continues to run, allowing the user to maintain a timer base while the rest of the device is sleeping. The ADC Noise Reduction mode stops the CPU and all I/O modules except asynchronous timer and ADC, to minimize switching noise during ADC conversions. In Standby mode, the crystal/resonator Oscillator is running while the rest of the device is sleeping. This allows very fast start-up combined with low-power consumption.

The device is manufactured using Atmel's high density non-volatile memory technology. The On-chip ISP Flash allows the program memory to be reprogrammed In-System through an SPI serial interface, by a conventional non-volatile memory programmer, or by an On-chip Boot program running on the AVR core. The Boot program can use any interface to download the application program in the Application Flash memory. Software in the Boot Flash section will continue to run while the Application Flash section is updated, providing true Read-While-Write operation. By combining an 8-bit RISC CPU with In-System Self-Programmable Flash on a monolithic chip, the Atmel ATmega165PA is a powerful microcontroller that provides a highly flexible and cost effective solution to many embedded control applications.

The ATmega165PA AVR is supported with a full suite of program and system development tools including: C Compilers, Macro Assemblers, Program Debugger/Simulators, In-Circuit Emulators, and Evaluation kits.



# 2.2 Pin Descriptions

#### 2.2.1 VCC

Digital supply voltage.

#### 2.2.2 GND

Ground.

#### 2.2.3 Port A (PA7:PA0)

Port A is an 8-bit bi-directional I/O port with internal pull-up resistors (selected for each bit). The Port A output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, Port A pins that are externally pulled low will source current if the pull-up resistors are activated. The Port A pins are tri-stated when a reset condition becomes active, even if the clock is not running.

Port A also serves the functions of various special features of the ATmega165PA as listed on "Alternate Functions of Port B" on page 69.

### 2.2.4 Port B (PB7:PB0)

Port B is an 8-bit bi-directional I/O port with internal pull-up resistors (selected for each bit). The Port B output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, Port B pins that are externally pulled low will source current if the pull-up resistors are activated. The Port B pins are tri-stated when a reset condition becomes active, even if the clock is not running.

Port B has better driving capabilities than the other ports.

Port B also serves the functions of various special features of the ATmega165PA as listed on "Alternate Functions of Port B" on page 69.

#### 2.2.5 Port C (PC7:PC0)

Port C is an 8-bit bi-directional I/O port with internal pull-up resistors (selected for each bit). The Port C output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, Port C pins that are externally pulled low will source current if the pull-up resistors are activated. The Port C pins are tri-stated when a reset condition becomes active, even if the clock is not running.

Port C also serves the functions of special features of the ATmega165PA as listed on "Alternate Functions of Port D" on page 72.

#### 2.2.6 Port D (PD7:PD0)

Port D is an 8-bit bi-directional I/O port with internal pull-up resistors (selected for each bit). The Port D output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, Port D pins that are externally pulled low will source current if the pull-up resistors are activated. The Port D pins are tri-stated when a reset condition becomes active, even if the clock is not running.

Port D also serves the functions of various special features of the ATmega165PA as listed on "Alternate Functions of Port D" on page 72.

#### 2.2.7 Port E (PE7:PE0)

Port E is an 8-bit bi-directional I/O port with internal pull-up resistors (selected for each bit). The Port E output buffers have symmetrical drive characteristics with both high sink and source



capability. As inputs, Port E pins that are externally pulled low will source current if the pull-up resistors are activated. The Port E pins are tri-stated when a reset condition becomes active, even if the clock is not running.

Port E also serves the functions of various special features of the ATmega165PA as listed on "Alternate Functions of Port E" on page 73.

### 2.2.8 Port F (PF7:PF0)

Port F serves as the analog inputs to the A/D Converter.

Port F also serves as an 8-bit bi-directional I/O port, if the A/D Converter is not used. Port pins can provide internal pull-up resistors (selected for each bit). The Port F output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, Port F pins that are externally pulled low will source current if the pull-up resistors are activated. The Port F pins are tri-stated when a reset condition becomes active, even if the clock is not running. If the JTAG interface is enabled, the pull-up resistors on pins PF7(TDI), PF5(TMS), and PF4(TCK) will be activated even if a reset occurs.

Port F also serves the functions of the JTAG interface, see "Alternate Functions of Port F" on page 75.

## 2.2.9 Port G (PG5:PG0)

Port G is a 6-bit bi-directional I/O port with internal pull-up resistors (selected for each bit). The Port G output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, Port G pins that are externally pulled low will source current if the pull-up resistors are activated. The Port G pins are tri-stated when a reset condition becomes active, even if the clock is not running.

Port G also serves the functions of various special features of the ATmega165PA as listed on page 77.

#### 2.2.10 RESET

Reset input. A low level on this pin for longer than the minimum pulse length will generate a reset, even if the clock is not running. The minimum pulse length is given in Table 27-3 on page 298. Shorter pulses are not guaranteed to generate a reset.

#### 2.2.11 XTAL1

Input to the inverting Oscillator amplifier and input to the internal clock operating circuit.

#### 2.2.12 XTAL2

Output from the inverting Oscillator amplifier.

#### 2.2.13 AVCC

AVCC is the supply voltage pin for Port F and the A/D Converter. It should be externally connected to  $V_{CC}$ , even if the ADC is not used. If the ADC is used, it should be connected to  $V_{CC}$  through a low-pass filter.

## 2.2.14 AREF

This is the analog reference pin for the A/D Converter.



# 3. Resources

A comprehensive set of development tools, application notes and datasheets are available for download on http://www.atmel.com/avr.

# 4. Data Retention

Reliability Qualification results show that the projected data retention failure rate is much less than 1 PPM over 20 years at 85°C or 100 years at 25°C.



# 5. Register Summary

Address	Name	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Page
(0xFF)	Reserved	_	_	_	_	_	_	_	_	
(0xFE)	Reserved	_	_	_	_	_	_	_	_	
(0xFD)	Reserved	_	_	_	_	_	_	_	_	
(0xFC)	Reserved	_	_	_	_	_	_	_	_	
(0xFB)	Reserved	_	_	_	_	_	_	_	_	
(0xFA)	Reserved	_	_	_	_	_	_	-	_	
(0xF9)	Reserved	_	_	_	_	_	-	-	-	
(0xF8)	Reserved	_	_	_	-	_	_	-	_	
(0xF7)	Reserved	-	-	-	-	-	-	-	-	
(0xF6)	Reserved	-	-	-	-	-	-	-	-	
(0xF5)	Reserved	_	-	-	-	-	-	-	-	
(0xF4)	Reserved	_	_	_	-	-	-	-	-	
(0xF3)	Reserved	-	-	-	-	-	-	-	-	
(0xF2)	Reserved	_	_	_	-	-	-	-	-	
(0xF1)	Reserved	-	-	-	-	-	-	-	-	
(0xF0)	Reserved	_	_	_	_	_	_	_	_	
(0xEF)	Reserved	-	_	_	_	-	_	_	_	
(0xEE) (0xED)	Reserved Reserved				_	_			_	
(0xEC)					_	_			_	
(0xEC)	Reserved Reserved				_	_			_	
(0xEA)	Reserved	_	_	_	_	_	_	_	_	
(0xE9)	Reserved	_	_	_	_	_	_	_	_	
(0xE8)	Reserved	_	_	_	_	_	_	_	_	
(0xE7)	Reserved	_	_	_	-	-	-	-	-	
(0xE6)	Reserved	_	_	_	-	_	_	-	-	
(0xE5)	Reserved	_	_	_	_	_	-	-	-	
(0xE4)	Reserved		-	-	-	-		-	-	
(0xE3)	Reserved	_	_	_	-	_	_	-	_	
(0xE2)	Reserved	-	-	-	-	-	-	-	-	
(0xE1)	Reserved	-	-	-	-	-	-	-	-	
(0xE0)	Reserved	_	-	-	-	-	-	-	-	
(0xDF)	Reserved	_	-	-	-	-	-	-	-	
(0xDE)	Reserved	_	-	-	-	-	-	-	-	
(0xDD)	Reserved	-	-	-	-	-	-	-	-	
(0xDC)	Reserved	_	_	_	-	_	_	_	-	
(0xDB)	Reserved	_	_	-	-	-	-	-	-	
(0xDA)	Reserved	_	_	_	-	-	-	-	-	
(0xD9)	Reserved	_	_	_	_	-	_	_	-	
(0xD8) (0xD7)	Reserved Reserved	_	_	_	_	_	_	_	_	
(0xD7)	Reserved				_					
(0xD6)	Reserved	_		_	_	_	_	_	_	
(0xD4)	Reserved	_	_	_	_	_	_	_	_	
(0xD3)	Reserved	_	-	_	-	_	_	-	-	
(0xD2)	Reserved	_	-	_	-	-	_	-	-	
(0xD1)	Reserved	-	-	-	-	-	-	-	-	
(0xD0)	Reserved	-	-	-	-	_	_	-	_	
(0xCF)	Reserved	-	-	-	-	-	-	-	-	
(0xCE)	Reserved	-	-	-	-	_	-	-	_	
(0xCD)	Reserved	-	-	-	-	-	-	-	_	
(0xCC)	Reserved	-	-	-	-	-	-	-	-	
(0xCB)	Reserved	-	-	-	-	-	-	-	-	
(0xCA)	Reserved	-	-	-	-	-	-	-	-	
(0xC9)	Reserved	_	_	_	_	-	_	_	-	
(0xC8)	Reserved	_	_	_	-	-	-	-	-	
(0xC7)	Reserved	-	-	-		-	-	-	-	
(0xC6)	UDR0				USART0 I/O	Data Register				181
(0xC5)	UBRR0H				LICARTOR	L. Desirio	USART0 Baud R	ate Register High		185
(0xC4)	UBRR0L Beconved		_	_		Rate Register Low	_	_	_	185
(0xC3)	Reserved	-		UPM01	UPM00	USBS0				100
(0xC2) (0xC1)	UCSR0C UCSR0B	- RXCIE0	UMSEL0 TXCIE0	UPM01 UDRIE0	RXEN0	TXEN0	UCSZ01 UCSZ02	UCSZ00 RXB80	UCPOL0 TXB80	183 182
(0xC1)	UCSR0B UCSR0A	RXC0	TXCIEU TXC0	UDRE0	FE0	DOR0	UPE0	U2X0	MPCM0	181
(UXCU)	UUSHUA	HXCU	IACU	UDKEU	reu	DOR0	UPEU	UZXU	IVIPUIVIU	181



Address	Name	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Page
(0xBF)	Reserved	-	-	-	-	-	-	-	-	
(0xBE)	Reserved	_	_	_	_	_	_	_	_	
(0xBD)	Reserved	_	_	_	-	-	-	-	-	
(0xBC)	Reserved	_	_	_	-	-	-	-	-	
(0xBB)	Reserved	_	_	_	-	-	-	-	-	
(0xBA)	USIDR				USI Data	a Register	•	•	•	194
(0xB9)	USISR	USISIF	USIOIF	USIPF	USIDC	USICNT3	USICNT2	USICNT1	USICNT0	194
(0xB8)	USICR	USISIE	USIOIE	USIWM1	USIWM0	USICS1	USICS0	USICLK	USITC	195
(0xB7)	Reserved	_		_	-	-	-	-	-	
(0xB6)	ASSR	_	_	_	EXCLK	AS2	TCN2UB	OCR2UB	TCR2UB	145
(0xB5)	Reserved	_	_	_	_	_	_	_	_	-
(0xB4)	Reserved	_	_	_	_	_	_	_	_	
(0xB3)	OCR2A			Tin	ner/Counter2 Outp	ut Compare Regist	ter A	·		144
(0xB2)	TCNT2					inter2 (8-bit)				144
(0xB1)	Reserved	_	_	_	_	_	_	_	_	144
(0xB0)	TCCR2A	FOC2A	WGM20	COM2A1	COM2A0	WGM21	CS22	CS21	CS20	142
(0xAF)	Reserved	- TOOZA	-	-	-		-	-		142
	•				_				-	
(0xAE)	Reserved	-	_			_	-	_	-	
(0xAD)	Reserved			_	_		-	_	_	
(0xAC)	Reserved	_	-	_	-	-	_	-	-	
(0xAB)	Reserved	-	-	-	-	_	_	-	-	
(0xAA)	Reserved	-	_	-	-	-	-	-	-	
(0xA9)	Reserved	-	-	-	-	-	-	-	-	
(8Ax0)	Reserved	-	-	-	-	-	-	-	-	
(0xA7)	Reserved	-	-	-	-	-	-	-	-	
(0xA6)	Reserved	_	_	-	-	-	-	_	-	
(0xA5)	Reserved	_	_	-	_	_	-	_	-	
(0xA4)	Reserved	_	_	_	-	-	-	_	-	
(0xA3)	Reserved	_	_	_	_	_	_	_	_	
(0xA2)	Reserved	_	_	_	_	_	_	_	_	
(0xA1)	Reserved	_	_	_	_	_	_	_	_	
(0xA0)	Reserved	_	_	_	_	_	_	_	_	
(0x9F)	Reserved	_	_	_	_	_	_	_	_	
(0x9E)	Reserved	_	_	_	_	_	_	_	_	
(0x9D)	Reserved	_	_	_	_	_	_	_	_	
(0x9C)	Reserved	_	_	_	_	_	_	_	_	
(0x9B)	Reserved	_	_	_	_	_	_	_	_	
(0x9A)	Reserved	_	_	_	_	_	_	_	_	
(0x99)	Reserved	_	_	_	_	_	_	_	_	
(0x98)	Reserved	_	_	_	_	_	_		_	
(0x97)	Reserved	-	_	=	=	=	-	-	-	
(0x96)	Reserved	-	-	-	-	-	-	-	-	
(0x95)	Reserved	-	-	_	-	-	-	_	-	
(0x94)	Reserved	-	_	_	-	-	-	-	-	
(0x93)	Reserved	-	-	-	-	-	-	-	-	
(0x92)	Reserved	-	-	-	-	-	-	-	-	
(0x91)	Reserved	-	_	-	-	-	-	-	-	
(0x90)	Reserved	_	-	_	-	-	-	-	-	
(0x8F)	Reserved	-	-	-	-	-	-	-	-	
(0x8E)	Reserved	-	_	_	-	-	-	-	-	
(0x8D)	Reserved	-	-	-	-	-	-	-	-	
(0x8C)	Reserved	-	-	-	-	-	-	-	-	
(0x8B)	OCR1BH			Timer/Co	unter1 - Output Co	mpare Register B	High Byte			122
(0x8A)	OCR1BL			Timer/Co	ounter1 - Output Co	ompare Register B	Low Byte			122
(0x89)	OCR1AH					ompare Register A				122
(0x88)	OCR1AL					ompare Register A				122
(0x87)	ICR1H					apture Register Hi	•			123
(0x86)	ICR1L					apture Register Lo				123
(0x85)	TCNT1H					nter Register High				123
· ,	TCNT1H TCNT1L						•			122
(0x84)	•	_	_			nter Register Low	1			122
(0x83)	Reserved			_	-	-	_	-	-	404
(0x82)	TCCR1C	FOC1A	FOC1B	-	-	-	-	-	-	121
(0x81)	TCCR1B	ICNC1	ICES1	-	WGM13	WGM12	CS12	CS11	CS10	120
(0x80)	TCCR1A	COM1A1	COM1A0	COM1B1	COM1B0	-	-	WGM11	WGM10	118
	DIDR1	_	_	_	_	_	-	AIN1D	AIN0D	201
(0x7F) (0x7E)	DIDR0	ADC7D	ADC6D	ADC5D	ADC4D	ADC3D	ADC2D	ADC1D	ADC0D	219



Address	Name	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Page
(0x7D)	Reserved	_	-	_	=	_	=	-	_	
(0x7C)	ADMUX	REFS1	REFS0	ADLAR	MUX4	MUX3	MUX2	MUX1	MUX0	215
(0x7B)	ADCSRB	-	ACME	-	-	-	ADTS2	ADTS1	ADTS0	200, 219
(0x7A)	ADCSRA	ADEN	ADSC	ADATE	ADIF	ADIE	ADPS2	ADPS1	ADPS0	217
(0x79)	ADCH					gister High byte				218
(0x78)	ADCL					gister Low byte				218
(0x77)	Reserved	-	-	_	_	_	_	-	_	
(0x76)	Reserved	_	_	_	_	_	_	_	_	
(0x75)	Reserved	-	_	-	_	-	-	-	-	
(0x74)	Reserved	-	_	-	_	-	-	-	-	
(0x73)	Reserved	_	-	-	_	_	-	-	_	
(0x72)	Reserved	-	_	-	_	-	-	-	-	
(0x71)	Reserved	_	_	_	_	_	-	_	_	
(0x70)	TIMSK2	_	_	_	_	_	-	OCIE2A	TOIE2	145
(0x6F)	TIMSK1	-	_	ICIE1	_	_	OCIE1B	OCIE1A	TOIE1	123
(0x6E)	TIMSK0	-	-	_	_	-	-	OCIE0A	TOIE0	95
(0x6D)	Reserved	_	_	_	_	-	-	-	-	
(0x6C)	PCMSK1	PCINT15	PCINT14	PCINT13	PCINT12	PCINT11	PCINT10	PCINT9	PCINT8	59
(0x6B)	PCMSK0	PCINT7	PCINT6	PCINT5	PCINT4	PCINT3	PCINT2	PCINT1	PCINT0	60
(0x6A)	Reserved	-	-	_	-	=	-	-	_	
(0x69)	EICRA	-	-	-	-	=	-	ISC01	ISC00	58
(0x68)	Reserved	-		-	=	=	-	=	-	
(0x67)	Reserved	_	-	-	=	_	_	=	_	
(0x66)	OSCCAL				Oscillator Calib	oration Register				34
(0x65)	Reserved	_		-	-	_	-	-	-	
(0x64)	PRR	_	_	-	-	PRTIM1	PRSPI	PRUSART0	PRADC	41
(0x63)	Reserved	-	_	-	-	_	-	-	-	
(0x62)	Reserved	-	-	-	-	-	-	-	-	
(0x61)	CLKPR	CLKPCE	-	-	-	CLKPS3	CLKPS2	CLKPS1	CLKPS0	34
(0x60)	WDTCR	-	-	-	WDCE	WDE	WDP2	WDP1	WDP0	50
0x3F (0x5F)	SREG	I	Т	Н	S	V	N	Z	С	9
0x3E (0x5E)	SPH	-	=	-	-	=	SP10	SP9	SP8	12
0x3D (0x5D)	SPL	SP7	SP6	SP5	SP4	SP3	SP2	SP1	SP0	12
0x3C (0x5C)	Reserved									
0x3B (0x5B)	Reserved									
0x3A (0x5A)	Reserved									
0x39 (0x59)	Reserved									
0x38 (0x58)	Reserved									
0x37 (0x57)	SPMCSR	SPMIE	RWWSB	-	RWWSRE	BLBSET	PGWRT	PGERS	SPMEN -	261
0x36 (0x56)	Reserved	-		-	-	-	-	-		
0x35 (0x55)	MCUCR	JTD		-	PUD	-	-	IVSEL	IVCE	56, 79, 246
0x34 (0x54)	MCUSR	-		_	JTRF	WDRF	BORF	EXTRF	PORF	246
0x33 (0x53)	SMCR	-		-	-	SM2	SM1	SM0	SE	41
0x32 (0x52)	Reserved	-	-	-	-	-	-	OCDR1	-	000
0x31 (0x51)	OCDR ACSR	IDRD/OCDR7	OCDR6	OCDR5 ACO	OCDR4 ACI	OCDR3 ACIE	OCDR2 ACIC	ACIS1	OCDR0 ACIS0	226 200
0x30 (0x50) 0x2F (0x4F)	Reserved	ACD –	ACBG	ACO –	ACI	ACIE	ACIO	ACIST	ACISU –	200
0x2F (0x4F) 0x2E (0x4E)	SPDR	-	_	_		Register	_	_	_	156
0x2E (0x4E) 0x2D (0x4D)	SPSR	SPIF	WCOL	-	SPI Data		_	_	SPI2X	155
0x2C (0x4C)	SPCR	SPIE	SPE	DORD	MSTR	CPOL	CPHA	SPR1	SPR0	154
0x2B (0x4B)	GPIOR2	OF IL:	JF L	שטחט		se I/O Register 2	OFTIA	OFNI	JE NU	25
0x2A (0x4A)	GPIOR2					se I/O Register 1				25
0x29 (0x49)	Reserved	-	=	_	– General Fulpos	-	_	_	_	
0x28 (0x48)	Reserved	_		_	_	_	_	_	_	
0x27 (0x47)	OCR0A				ner/Counter0 Outp	ut Compare Regist				95
0x26 (0x46)	TCNT0			111		nter0 (8 Bit)				95
0x25 (0x45)	Reserved	_	-	_	-	-	_	_	_	1 35
— · · · · ·	TCCR0A	FOC0A	WGM00	COM0A1	COM0A0	WGM01	CS02	CS01	CS00	93
0x24 (0x44)		50,,		-	-	-	-	PSR2	PSR10	127, 146
0x24 (0x44) 0x23 (0x43)	GTCCB	TSM	_					. 51 12	. 51110	· ·
0x23 (0x43)	GTCCR EEARH	TSM -		1	_				EEAR8	24
0x23 (0x43) 0x22 (0x42)	EEARH	TSM -	-	-	– EEPROM Address	- Register Low Byte	-	-	EEAR8	24
0x23 (0x43) 0x22 (0x42) 0x21 (0x41)	EEARH EEARL			-	EEPROM Address			-	EEAR8	24
0x23 (0x43) 0x22 (0x42) 0x21 (0x41) 0x20 (0x40)	EEARH EEARL EEDR			-	EEPROM Address	ata Register				24 24
0x23 (0x43) 0x22 (0x42) 0x21 (0x41)	EEARH EEARL	-	-	-	EEPROM Address EEPROM D			EEWE	EEAR8 EERE	24
0x23 (0x43) 0x22 (0x42) 0x21 (0x41) 0x20 (0x40) 0x1F (0x3F)	EEARH EEARL EEDR EECR	-	-	-	EEPROM Address EEPROM D	ata Register  EERIE				24 24 24



Address	Name	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Page
0x1B (0x3B)	Reserved	-	-	-	-	-	-	-	-	
0x1A (0x3A)	Reserved	-	-	-	-	-	-	-	-	
0x19 (0x39)	Reserved	-	-	-	-	-	-	-	-	
0x18 (0x38)	Reserved	-	-	-	-	-	-	-	-	
0x17 (0x37)	TIFR2	-	-	-	-	-	-	OCF2A	TOV2	145
0x16 (0x36)	TIFR1	-	-	ICF1	-	-	OCF1B	OCF1A	TOV1	124
0x15 (0x35)	TIFR0	-	-	-	-	-	-	OCF0A	TOV0	96
0x14 (0x34)	PORTG	-	-	PORTG5	PORTG4	PORTG3	PORTG2	PORTG1	PORTG0	81
0x13 (0x33)	DDRG	-	-	DDG5	DDG4	DDG3	DDG2	DDG1	DDG0	81
0x12 (0x32)	PING	-	-	PING5	PING4	PING3	PING2	PING1	PING0	81
0x11 (0x31)	PORTF	PORTF7	PORTF6	PORTF5	PORTF4	PORTF3	PORTF2	PORTF1	PORTF0	81
0x10 (0x30)	DDRF	DDF7	DDF6	DDF5	DDF4	DDF3	DDF2	DDF1	DDF0	81
0x0F (0x2F)	PINF	PINF7	PINF6	PINF5	PINF4	PINF3	PINF2	PINF1	PINF0	81
0x0E (0x2E)	PORTE	PORTE7	PORTE6	PORTE5	PORTE4	PORTE3	PORTE2	PORTE1	PORTE0	80
0x0D (0x2D)	DDRE	DDE7	DDE6	DDE5	DDE4	DDE3	DDE2	DDE1	DDE0	80
0x0C (0x2C)	PINE	PINE7	PINE6	PINE5	PINE4	PINE3	PINE2	PINE1	PINE0	81
0x0B (0x2B)	PORTD	PORTD7	PORTD6	PORTD5	PORTD4	PORTD3	PORTD2	PORTD1	PORTD0	80
0x0A (0x2A)	DDRD	DDD7	DDD6	DDD5	DDD4	DDD3	DDD2	DDD1	DDD0	80
0x09 (0x29)	PIND	PIND7	PIND6	PIND5	PIND4	PIND3	PIND2	PIND1	PIND0	80
0x08 (0x28)	PORTC	PORTC7	PORTC6	PORTC5	PORTC4	PORTC3	PORTC2	PORTC1	PORTC0	80
0x07 (0x27)	DDRC	DDC7	DDC6	DDC5	DDC4	DDC3	DDC2	DDC1	DDC0	80
0x06 (0x26)	PINC	PINC7	PINC6	PINC5	PINC4	PINC3	PINC2	PINC1	PINC0	80
0x05 (0x25)	PORTB	PORTB7	PORTB6	PORTB5	PORTB4	PORTB3	PORTB2	PORTB1	PORTB0	79
0x04 (0x24)	DDRB	DDB7	DDB6	DDB5	DDB4	DDB3	DDB2	DDB1	DDB0	79
0x03 (0x23)	PINB	PINB7	PINB6	PINB5	PINB4	PINB3	PINB2	PINB1	PINB0	79
0x02 (0x22)	PORTA	PORTA7	PORTA6	PORTA5	PORTA4	PORTA3	PORTA2	PORTA1	PORTA0	79
0x01 (0x21)	DDRA	DDA7	DDA6	DDA5	DDA4	DDA3	DDA2	DDA1	DDA0	79
0x00 (0x20)	PINA	PINA7	PINA6	PINA5	PINA4	PINA3	PINA2	PINA1	PINA0	79

Note:

- 1. For compatibility with future devices, reserved bits should be written to zero if accessed. Reserved I/O memory addresses should never be written.
- 2. I/O Registers within the address range 0x00 0x1F are directly bit-accessible using the SBI and CBI instructions. In these registers, the value of single bits can be checked by using the SBIS and SBIC instructions.
- 3. Some of the Status Flags are cleared by writing a logical one to them. Note that, unlike most other AVRs, the CBI and SBI instructions will only operate on the specified bit, and can therefore be used on registers containing such Status Flags. The CBI and SBI instructions work with registers 0x00 to 0x1F only.
- 4. When using the I/O specific commands IN and OUT, the I/O addresses 0x00 0x3F must be used. When addressing I/O Registers as data space using LD and ST instructions, 0x20 must be added to these addresses. The ATmega165PA is a complex microcontroller with more peripheral units than can be supported within the 64 location reserved in Opcode for the IN and OUT instructions. For the Extended I/O space from 0x60 0xFF in SRAM, only the ST/STS/STD and LD/LDS/LDD instructions can be used.



# 6. Instruction Set Summary

Mnemonics	Operands	Description	Operation	Flags	#Clocks
ARITHMETIC AND L	OGIC INSTRUCTIONS	3			
ADD	Rd, Rr	Add two Registers	Rd ← Rd + Rr	Z,C,N,V,H	1
ADC	Rd, Rr	Add with Carry two Registers	$Rd \leftarrow Rd + Rr + C$	Z,C,N,V,H	1
ADIW	Rdl,K	Add Immediate to Word	Rdh:Rdl ← Rdh:Rdl + K	Z,C,N,V,S	2
SUB	Rd, Rr	Subtract two Registers	Rd ← Rd - Rr	Z,C,N,V,H	1
SUBI	Rd, K	Subtract Constant from Register	Rd ← Rd - K	Z,C,N,V,H	1
SBC	Rd, Rr	Subtract with Carry two Registers	$Rd \leftarrow Rd - Rr - C$	Z,C,N,V,H	1
SBCI	Rd, K	Subtract with Carry Constant from Reg.	Rd ← Rd - K - C	Z,C,N,V,H	1
SBIW	Rdl,K	Subtract Immediate from Word	Rdh:Rdl ← Rdh:Rdl - K	Z,C,N,V,S	2
AND	Rd, Rr	Logical AND Registers	Rd ← Rd • Rr	Z,N,V	1
ANDI	Rd, K	Logical AND Register and Constant	$Rd \leftarrow Rd \bullet K$	Z,N,V	1
OR	Rd, Rr	Logical OR Registers	$Rd \leftarrow Rd v Rr$	Z,N,V	1
ORI	Rd, K	Logical OR Register and Constant	$Rd \leftarrow Rd \vee K$	Z,N,V	1
EOR	Rd, Rr	Exclusive OR Registers	$Rd \leftarrow Rd \oplus Rr$	Z,N,V	1
COM	Rd	One's Complement	$Rd \leftarrow 0xFF - Rd$	Z,C,N,V	1
NEG	Rd	Two's Complement	Rd ← 0x00 − Rd	Z,C,N,V,H	1
SBR	Rd,K	Set Bit(s) in Register	Rd ← Rd v K	Z,N,V	1
CBR	Rd,K	Clear Bit(s) in Register	$Rd \leftarrow Rd \bullet (0xFF - K)$	Z,N,V	1
INC	Rd	Increment	Rd ← Rd + 1	Z,N,V	1
DEC	Rd	Decrement	Rd ← Rd − 1	Z,N,V	1
TST	Rd	Test for Zero or Minus	Rd ← Rd • Rd	Z,N,V	1
CLR	Rd	Clear Register	$Rd \leftarrow Rd \oplus Rd$ $Rd \leftarrow 0xFF$	Z,N,V	1
SER	Rd	Set Register		None	1
MULS	Rd, Rr	Multiply Unsigned	R1:R0 ← Rd x Rr	Z,C	2
MULSU	Rd, Rr Rd, Rr	Multiply Signed	R1:R0 $\leftarrow$ Rd x Rr R1:R0 $\leftarrow$ Rd x Rr	Z,C Z,C	2
FMUL	Rd, Rr	Multiply Signed with Unsigned Fractional Multiply Unsigned	R1:R0 ← (Rd x Rr) << 1	Z,C	2
FMULS	Rd, Rr	Fractional Multiply Signed	R1:R0 ¬ (Rd x Rr) << 1	Z,C	2
FMULSU	Rd, Rr	Fractional Multiply Signed with Unsigned	R1:R0 ¬ (Rd x Rr) << 1	Z,C	2
BRANCH INSTRUCT		Traditional Manaphy Digited With Orloighted	THE CHANTED ACT	2,0	
RJMP	k	Relative Jump	PC ← PC + k + 1	None	2
IJMP		Indirect Jump to (Z)	PC ← Z	None	2
JMP	k	Direct Jump	PC ← k	None	3
RCALL	k	Relative Subroutine Call	PC ← PC + k + 1	None	3
ICALL		Indirect Call to (Z)	PC ← Z	None	3
CALL	k	Direct Subroutine Call	PC ← k	None	4
RET		Subroutine Return	PC ← STACK	None	4
RETI		Interrupt Return	PC ← STACK	1	4
CPSE	Rd,Rr	Compare, Skip if Equal	if (Rd = Rr) PC ← PC + 2 or 3	None	1/2/3
СР	Rd,Rr	Compare	Rd – Rr	Z, N,V,C,H	1
CPC	Rd,Rr	Compare with Carry	Rd – Rr – C	Z, N,V,C,H	1
CPI	Rd,K	Compare Register with Immediate	Rd – K	Z, N,V,C,H	1
SBRC	Rr, b	Skip if Bit in Register Cleared	if (Rr(b)=0) PC ← PC + 2 or 3	None	1/2/3
SBRS	Rr, b	Skip if Bit in Register is Set	if (Rr(b)=1) PC ← PC + 2 or 3	None	1/2/3
SBIC	P, b	Skip if Bit in I/O Register Cleared	if (P(b)=0) PC ← PC + 2 or 3	None	1/2/3
SBIS	P, b	Skip if Bit in I/O Register is Set	if (P(b)=1) PC ← PC + 2 or 3	None	1/2/3
BRBS	s, k	Branch if Status Flag Set	if $(SREG(s) = 1)$ then $PC \leftarrow PC + k + 1$	None	1/2
BRBC	s, k	Branch if Status Flag Cleared	if $(SREG(s) = 0)$ then $PC \leftarrow PC + k + 1$	None	1/2
BREQ	k	Branch if Equal	if (Z = 1) then PC ← PC + k + 1	None	1/2
BRNE	k	Branch if Not Equal	if (Z = 0) then PC ← PC + k + 1	None	1/2
BRCS	k	Branch if Carry Set	if (C = 1) then PC ← PC + k + 1	None	1/2
BRCC	k	Branch if Carry Cleared	if (C = 0) then PC $\leftarrow$ PC + k + 1	None	1/2
BRSH	k	Branch if Same or Higher	if (C = 0) then PC $\leftarrow$ PC + k + 1	None	1/2
BRLO	k	Branch if Lower	if (C = 1) then PC ← PC + k + 1	None	1/2
BRMI	k	Branch if Minus	if (N = 1) then PC ← PC + k + 1	None	1/2
BRPL	k	Branch if Plus	if (N = 0) then PC ← PC + k + 1	None	1/2
BRGE	k	Branch if Greater or Equal, Signed	if (N ⊕ V= 0) then PC ← PC + k + 1	None	1/2
BRLT	k	Branch if Less Than Zero, Signed	if (N ⊕ V= 1) then PC ← PC + k + 1	None	1/2
BRHS	k	Branch if Half Carry Flag Set	if (H = 1) then PC ← PC + k + 1	None	1/2
BRHC	k	Branch if Half Carry Flag Cleared	if (H = 0) then PC ← PC + k + 1	None	1/2
BRTS	k	Branch if T Flag Set	if (T = 1) then PC ← PC + k + 1	None	1/2
DDTO					
BRTC BRVS	k	Branch if T Flag Cleared  Branch if Overflow Flag is Set	if (T = 0) then PC $\leftarrow$ PC + k + 1 if (V = 1) then PC $\leftarrow$ PC + k + 1	None None	1/2



Mnemonics	Operands	Description	Operation	Flags	#Clocks
BRVC	k	Branch if Overflow Flag is Cleared	if (V = 0) then PC ← PC + k + 1	None	1/2
BRIE	k	Branch if Interrupt Enabled	if ( I = 1) then PC ← PC + k + 1	None	1/2
BRID	k	Branch if Interrupt Disabled	if (I = 0) then PC $\leftarrow$ PC + k + 1	None	1/2
BIT AND BIT-TEST I	INSTRUCTIONS				
SBI	P,b	Set Bit in I/O Register	I/O(P,b) ← 1	None	2
CBI	P,b	Clear Bit in I/O Register	I/O(P,b) ← 0	None	2
LSL	Rd	Logical Shift Left	$Rd(n+1) \leftarrow Rd(n), Rd(0) \leftarrow 0$	Z,C,N,V	1
LSR	Rd	Logical Shift Right	$Rd(n) \leftarrow Rd(n+1), Rd(7) \leftarrow 0$	Z,C,N,V	1
ROL	Rd	Rotate Left Through Carry	$Rd(0)\leftarrow C,Rd(n+1)\leftarrow Rd(n),C\leftarrow Rd(7)$	Z,C,N,V	1
ROR	Rd	Rotate Right Through Carry	$Rd(7)\leftarrow C,Rd(n)\leftarrow Rd(n+1),C\leftarrow Rd(0)$	Z,C,N,V	1
ASR	Rd	Arithmetic Shift Right	$Rd(n) \leftarrow Rd(n+1), n=06$	Z,C,N,V	1
SWAP	Rd	Swap Nibbles	Rd(30)←Rd(74),Rd(74)←Rd(30)	None	1
BSET	s	Flag Set	SREG(s) ← 1	SREG(s)	1
BCLR	s	Flag Clear	SREG(s) ← 0	SREG(s)	1
BST	Rr, b	Bit Store from Register to T	$T \leftarrow Rr(b)$	Т	1
BLD	Rd, b	Bit load from T to Register	$Rd(b) \leftarrow T$	None	1
SEC		Set Carry	C ← 1	С	1
CLC		Clear Carry	C ← 0	С	1
SEN		Set Negative Flag	N ← 1	N	1
CLN		Clear Negative Flag	N ← 0	N	1
SEZ		Set Zero Flag	Z ← 1	Z	1
CLZ		Clear Zero Flag	Z ← 0	Z	1
SEI		Global Interrupt Enable	I ← 1	1	1
CLI		Global Interrupt Disable	1 ← 0	I	1
SES		Set Signed Test Flag	S ← 1	S	1
CLS		Clear Signed Test Flag	S ← 0	S	1
SEV		Set Twos Complement Overflow.	V ← 1	V	1
CLV		Clear Twos Complement Overflow	V ← 0	V	1
SET		Set T in SREG	T ← 1	T	1
CLT		Clear T in SREG	T ← 0	T	1
SEH		Set Half Carry Flag in SREG	H ← 1	H	1
CLH		Clear Half Carry Flag in SREG	H ← 0	Н	1
DATA TRANSFER IN	1	I.v. D.:			1 .
MOV	Rd, Rr	Move Between Registers	Rd ← Rr Rd+1:Rd ← Rr+1:Rr	None	1
MOVW	Rd, Rr	Copy Register Word	nu+1.nu ← ni+1.ni	None	1
	D4 K	Load Immediate	Dd . V	Nene	4
LDI	Rd, K	Load Immediate	Rd ← K	None	1
LDI LD	Rd, X	Load Indirect	$Rd \leftarrow (X)$	None	2
LDI LD LD	Rd, X Rd, X+	Load Indirect Load Indirect and Post-Inc.	$Rd \leftarrow (X)$ $Rd \leftarrow (X), X \leftarrow X + 1$	None None	2 2
LDI LD LD	Rd, X Rd, X+ Rd, - X	Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec.	$Rd \leftarrow (X)$ $Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$	None None None	2 2 2
LDI LD LD LD LD	Rd, X Rd, X+ Rd, - X Rd, Y	Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect	$\begin{aligned} &Rd \leftarrow (X) \\ &Rd \leftarrow (X), X \leftarrow X + 1 \\ &X \leftarrow X - 1, Rd \leftarrow (X) \\ &Rd \leftarrow (Y) \end{aligned}$	None None None	2 2 2 2
LDI LD LD LD LD LD LD	Rd, X Rd, X+ Rd, - X Rd, Y Rd, Y+	Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect Load Indirect and Post-Inc.	$\begin{aligned} &Rd \leftarrow (X) \\ &Rd \leftarrow (X), X \leftarrow X + 1 \\ &X \leftarrow X - 1, Rd \leftarrow (X) \\ &Rd \leftarrow (Y) \\ &Rd \leftarrow (Y), Y \leftarrow Y + 1 \end{aligned}$	None None None None None	2 2 2 2 2 2
LDI LD LD LD LD LD LD LD LD	Rd, X Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y	Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec.	$Rd \leftarrow (X)$ $Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$	None None None None None None None	2 2 2 2 2 2 2
LDI LD	Rd, X Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, Y+q	Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement	$Rd \leftarrow (X)$ $Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$	None None None None None None None None	2 2 2 2 2 2 2 2 2
LDI LD LD LD LD LD LD LD LD	Rd, X Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y	Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec.	$Rd \leftarrow (X)$ $Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$	None None None None None None None	2 2 2 2 2 2 2
LDI LD	Rd, X Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd,Y+q Rd, Z Rd, Z+	Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect Load Indirect and Post-Inc.	$Rd \leftarrow (X)$ $Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$ $Rd \leftarrow (Z)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LDI LD	Rd, X Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, Y+ Rd, Z	Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect	$Rd \leftarrow (X)$ $Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$ $Rd \leftarrow (Z)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2
LDI LD	Rd, X Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, - Y Rd, - Y Rd, Z+ Rd, Z+ Rd, -Z	Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec.	$Rd \leftarrow (X)$ $Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$ $Rd \leftarrow (Z)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z + q)$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LDI LD	Rd, X Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, - Y Rd, Y+q Rd, Z Rd, Z+ Rd, -Z Rd, Z+q	Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect with Displacement	$Rd \leftarrow (X)$ $Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$ $Rd \leftarrow (Z)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LDI LD	Rd, X Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, - Y Rd, Y+q Rd, Z Rd, Z Rd, Z+ Rd, -Z Rd, Z+q Rd, k	Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect with Displacement Load Indirect with Displacement Load Indirect with Displacement Load Direct from SRAM	$Rd \leftarrow (X)$ $Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$ $Rd \leftarrow (Z)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z + q)$ $Rd \leftarrow (X + q)$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LDI LD	Rd, X Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, Y+ Rd, - Y Rd, Z+ Rd, Z- Rd, Z+ Rd, -Z Rd, Z+q Rd, k X, Rr	Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Direct from SRAM Store Indirect	$Rd \leftarrow (X)$ $Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$ $Rd \leftarrow (Z)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z + q)$ $Rd \leftarrow (X + q)$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LDI LD	Rd, X Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, Y+q Rd, Z Rd, Z Rd, Z Rd, Z Rd, Z+ Rd, X Rd, X Rr X+, Rr	Load Indirect  Load Indirect and Post-Inc.  Load Indirect and Pre-Dec.  Load Indirect and Post-Inc.  Load Indirect and Post-Inc.  Load Indirect and Pre-Dec.  Load Indirect with Displacement  Load Indirect and Post-Inc.  Load Indirect and Post-Inc.  Load Indirect and Post-Inc.  Load Indirect and Pre-Dec.  Load Indirect with Displacement  Load Direct from SRAM  Store Indirect  Store Indirect and Post-Inc.	$Rd \leftarrow (X)$ $Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X \cdot 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y \cdot 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$ $Rd \leftarrow (Y + q)$ $Rd \leftarrow (Z)$ $Rd \leftarrow (Z)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z \cdot 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z + q)$ $Rd \leftarrow (X $	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LDI LD	Rd, X Rd, X+ Rd, -X Rd, -X Rd, Y Rd, Y+ Rd, - Y Rd, Y+q Rd, Z Rd, Z Rd, Z Rd, Z- Rd, Z- Rd, Z- Rd, X, Rr X+, Rr - X, Rr	Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Direct from SRAM Store Indirect Store Indirect and Post-Inc. Store Indirect and Post-Inc.	$Rd \leftarrow (X)$ $Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X \cdot 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y \cdot 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$ $Rd \leftarrow (Z)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z \cdot 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z + q)$ $Rd \leftarrow (K)$ $(X) \leftarrow Rr$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LDI LD	Rd, X Rd, X+ Rd, -X Rd, -X Rd, Y Rd, Y+ Rd, -Y Rd, Y+q Rd, Z Rd, Z Rd, Z- Rd, Z- Rd, Z- Rd, Z- Rd, X- Rd, X	Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Direct from SRAM Store Indirect Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec.	$Rd \leftarrow (X)$ $Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z + q)$ $Rd \leftarrow (X + q)$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LDI LD	Rd, X Rd, X+ Rd, -X Rd, Y Rd, Y+ Rd, -Y Rd, Y+ Rd, Z Rd, Z Rd, Z+ Rd, -Z Rd, Z- Rd, -Z Rd, -X	Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect with Displacement Load Indirect with Displacement Load Direct from SRAM Store Indirect Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec.	$Rd \leftarrow (X)$ $Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z + q)$ $Rd \leftarrow (Z + q)$ $Rd \leftarrow (X + q)$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LDI LD	Rd, X Rd, X+ Rd, -X Rd, -X Rd, Y Rd, Y+ Rd, - Y Rd, Y+ Rd, Z Rd, Z+ Rd, -Z Rd, Z+ Rd, -Z Rd, K X, Rr X+, Rr - X, Rr Y+, Rr - Y, Rr	Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Direct from SRAM Store Indirect Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect Store Indirect and Pre-Dec. Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Post-Inc.	$Rd \leftarrow (X)$ $Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z + q)$ $Rd \leftarrow (Z + q)$ $Rd \leftarrow (X + q)$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LDI LD LS ST ST ST ST STD	Rd, X Rd, X+ Rd, -X Rd, -X Rd, Y Rd, Y+ Rd, - Y Rd, Y+ Rd, -Y Rd, Z+ Rd, Z- Rd, X- Rd, -Z Rd, X- Rd, -Z Rd, X- Rd, -Z Rd,	Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Direct from SRAM Store Indirect Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect Store Indirect and Pre-Dec. Store Indirect Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec.	$ \begin{array}{c} Rd \leftarrow (X) \\ Rd \leftarrow (X), X \leftarrow X + 1 \\ X \leftarrow X - 1, Rd \leftarrow (X) \\ Rd \leftarrow (Y) \\ Rd \leftarrow (Y) \\ Rd \leftarrow (Y), Y \leftarrow Y + 1 \\ Y \leftarrow Y - 1, Rd \leftarrow (Y) \\ Rd \leftarrow (Y + q) \\ Rd \leftarrow (Z) \\ Rd \leftarrow (Z), Z \leftarrow Z + 1 \\ Z \leftarrow Z - 1, Rd \leftarrow (Z) \\ Rd \leftarrow (Z + q) \\ Rd$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LDI LD LS ST	Rd, X Rd, X+ Rd, -X Rd, -X Rd, Y Rd, Y+ Rd, - Y Rd, Y+ Rd, -Y Rd, Z+ Rd, Z- Rd, Z- Rd, Z- Rd, Z+ Rd, -Z Rd, Z+q Rd, k X, Rr X+, Rr - X, Rr Y, Rr - Y, Rr Y+q, Rr Z, Rr	Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Direct from SRAM Store Indirect Store Indirect and Post-Inc. Store Indirect and Pre-Dec.	$ \begin{array}{c} Rd \leftarrow (X) \\ Rd \leftarrow (X), X \leftarrow X + 1 \\ X \leftarrow X - 1, Rd \leftarrow (X) \\ Rd \leftarrow (Y) \\ Rd \leftarrow (Y) \\ Rd \leftarrow (Y), Y \leftarrow Y + 1 \\ Y \leftarrow Y - 1, Rd \leftarrow (Y) \\ Rd \leftarrow (Y + q) \\ Rd \leftarrow (Z) \\ Rd \leftarrow (Z), Z \leftarrow Z + 1 \\ Z \leftarrow Z - 1, Rd \leftarrow (Z) \\ Rd \leftarrow (Z + q) \\ Rd \leftarrow (Z + q) \\ Rd \leftarrow (X + q) \\ Rd$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LDI LD LS	Rd, X Rd, X+ Rd, -X Rd, -X Rd, Y Rd, Y+ Rd, - Y Rd,Y+q Rd, Z Rd, Z+ Rd, -Z Rd, Z+q Rd, k X, Rr X+, Rr -X, Rr Y+, Rr -Y, Rr Y+q,Rr Z, Rr Z+, Rr Z+, Rr	Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Direct from SRAM Store Indirect Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect with Displacement Store Indirect with Displacement Store Indirect	$ \begin{array}{c} Rd \leftarrow (X) \\ Rd \leftarrow (X), X \leftarrow X + 1 \\ X \leftarrow X - 1, Rd \leftarrow (X) \\ Rd \leftarrow (Y) \\ Rd \leftarrow (Y) \\ Rd \leftarrow (Y), Y \leftarrow Y + 1 \\ Y \leftarrow Y - 1, Rd \leftarrow (Y) \\ Rd \leftarrow (Y + q) \\ Rd \leftarrow (Z) \\ Rd \leftarrow (Z), Z \leftarrow Z + 1 \\ Z \leftarrow Z - 1, Rd \leftarrow (Z) \\ Rd \leftarrow (Z + q) \\ Rd \leftarrow (Z + q) \\ Rd \leftarrow (X + q) \\ Rd$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LDI LD	Rd, X Rd, X+ Rd, -X Rd, -X Rd, Y Rd, Y+ Rd, -Y Rd, Y+ Rd, -Y Rd, Z Rd, Z+ Rd, -Z Rd, Z+ Rd, -Z Rd, Z+q Rd, k X, Rr X+, Rr -X, Rr Y+, Rr -Y, Rr Y+q,Rr Z, Rr Z+, Rr Z+, Rr -Z, Rr	Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Direct from SRAM Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Post-Inc.	$ \begin{array}{c} Rd \leftarrow (X) \\ Rd \leftarrow (X), X \leftarrow X + 1 \\ X \leftarrow X - 1, Rd \leftarrow (X) \\ Rd \leftarrow (Y) \\ Rd \leftarrow (Y) \\ Rd \leftarrow (Y), Y \leftarrow Y + 1 \\ Y \leftarrow Y - 1, Rd \leftarrow (Y) \\ Rd \leftarrow (Y + q) \\ Rd \leftarrow (Z) \\ Rd \leftarrow (Z), Z \leftarrow Z + 1 \\ Z \leftarrow Z - 1, Rd \leftarrow (Z) \\ Rd \leftarrow (Z + q) \\ Rd \leftarrow (Z + q) \\ Rd \leftarrow (X + q) \\ Rd$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LDI LD	Rd, X Rd, X+ Rd, -X Rd, -X Rd, Y Rd, Y+ Rd, -Y Rd, Y+ Rd, -Y Rd, Z+ Rd, Z- Rd, Z+ Rd, -Z Rd, Z+q Rd, k X, Rr X+, Rr -X, Rr Y+, Rr -Y, Rr Y+q,Rr Z, Rr Z+, Rr Z+, Rr Z+q,Rr	Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Direct from SRAM Store Indirect and Pre-Dec. Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect with Displacement Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Post-Inc.	$ \begin{array}{c} Rd \leftarrow (X) \\ Rd \leftarrow (X), X \leftarrow X + 1 \\ X \leftarrow X - 1, Rd \leftarrow (X) \\ Rd \leftarrow (Y) \\ Rd \leftarrow (Y) \\ Rd \leftarrow (Y), Y \leftarrow Y + 1 \\ Y \leftarrow Y - 1, Rd \leftarrow (Y) \\ Rd \leftarrow (Y + q) \\ Rd \leftarrow (Z) \\ Rd \leftarrow (Z), Z \leftarrow Z + 1 \\ Z \leftarrow Z - 1, Rd \leftarrow (Z) \\ Rd \leftarrow (Z + q) \\ Rd \leftarrow (X + q) \\ Rd$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LDI LD	Rd, X Rd, X+ Rd, -X Rd, -X Rd, Y Rd, Y+ Rd, -Y Rd, Y+ Rd, -Y Rd, Z+ Rd, Z- Rd, Z+ Rd, -Z Rd, Z+q Rd, k X, Rr X+, Rr -X, Rr Y+, Rr -Y, Rr Y+q,Rr Z, Rr Z+, Rr Z+, Rr Z+q,Rr	Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Direct from SRAM Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect and Post-Inc. Store Indirect with Displacement Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec.	$ \begin{array}{c} Rd \leftarrow (X) \\ Rd \leftarrow (X), X \leftarrow X + 1 \\ X \leftarrow X - 1, Rd \leftarrow (X) \\ Rd \leftarrow (Y) \\ Rd \leftarrow (Y) \\ Rd \leftarrow (Y), Y \leftarrow Y + 1 \\ Y \leftarrow Y - 1, Rd \leftarrow (Y) \\ Rd \leftarrow (Y + q) \\ Rd \leftarrow (Z) \\ Rd \leftarrow (Z), Z \leftarrow Z + 1 \\ Z \leftarrow Z - 1, Rd \leftarrow (Z) \\ Rd \leftarrow (Z + q) \\ Rd \leftarrow (X + q) \\ Rd$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LDI LD	Rd, X Rd, X+ Rd, Y+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, Y+q Rd, Z Rd, Z+ Rd, Z- Rd, Z+ Rd, Z+ Rd, K X, Rr X+, Rr - X, Rr Y+Rr - Y, Rr Y+q,Rr Z, Rr Z+, Rr Z+q, Rr k, Rr	Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect with Displacement Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec.	$ \begin{array}{c} Rd \leftarrow (X) \\ Rd \leftarrow (X), X \leftarrow X + 1 \\ X \leftarrow X \cdot 1, Rd \leftarrow (X) \\ Rd \leftarrow (Y) \\ Rd \leftarrow (Y) \\ Rd \leftarrow (Y), Y \leftarrow Y + 1 \\ Y \leftarrow Y \cdot 1, Rd \leftarrow (Y) \\ Rd \leftarrow (Y + q) \\ Rd \leftarrow (Z) \\$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LDI LD	Rd, X Rd, X+ Rd, Y+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, Y+q Rd, Z Rd, Z+ Rd, Z- Rd, Z+ Rd, Z+ Rd, K X, Rr X+, Rr - X, Rr Y+, Rr - Y+, Rr - Y+q, Rr Z, Rr Z+q, Rr Rd, Z	Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Direct from SRAM Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect sond Pre-Dec. Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect with Displacement Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect with Displacement Store Indirect and Pre-Dec.	$Rd \leftarrow (X)$ $Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X \cdot 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y \cdot 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$ $Rd \leftarrow (Z)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z \cdot 1, Rd \leftarrow (Z)$ $Rd \leftarrow (k)$ $(X) \leftarrow Rr$ $(X) \leftarrow Rr$ $(X) \leftarrow Rr$ $(X) \leftarrow Rr$ $(Y) \leftarrow Rr$ $(Y + q) \leftarrow Rr$ $(Z) \leftarrow Rr$ $(Z \rightarrow R, Z \leftarrow Z + 1$ $Z \leftarrow Z \cdot 1, (Z) \leftarrow Rr$ $(Z + q) \leftarrow Rr$ $(k) \leftarrow Rr$ $(k) \leftarrow Rr$ $(k) \leftarrow Rr$ $(k) \leftarrow Rr$ $(R) \leftarrow (Z)$ $Rd \leftarrow (Z)$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LDI LD ST	Rd, X Rd, X+ Rd, Y+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, Y+q Rd, Z Rd, Z+ Rd, Z- Rd, Z+ Rd, Z+ Rd, K X, Rr X+, Rr - X, Rr Y+, Rr - Y+, Rr - Y+q, Rr Z, Rr Z+q, Rr Rd, Z	Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Direct from SRAM Store Indirect Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect with Displacement Store Indirect with Displacement Store Indirect and Pre-Dec.	$Rd \leftarrow (X)$ $Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (K)$ $(X) \leftarrow Rr$ $(X) \leftarrow Rr$ $(X) \leftarrow Rr$ $(X) \leftarrow Rr$ $(Y) \leftarrow Rr$ $(Y + q) \leftarrow Rr$ $(Z) \leftarrow Rr$ $(Z \leftarrow Z - 1, (Z) \leftarrow Rr$ $(Z \leftarrow Rr)$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2



Mnemonics	Operands	Description	ription Operation Flags		#Clocks
PUSH	Rr	Push Register on Stack	STACK ← Rr	None	2
POP	Rd	Pop Register from Stack	Rd ← STACK	None	2
MCU CONTROL INS	TRUCTIONS				
NOP		No Operation		None	1
SLEEP		Sleep	(see specific descr. for Sleep function)	None	1
WDR		Watchdog Reset	(see specific descr. for WDR/timer)	None	1
BREAK		Break	For On-chip Debug Only	None N/A	



# **Ordering Information**

Speed (MHz) <sup>(3)</sup>	Power Supply	Ordering Code	Package <sup>(1)(2)</sup>	Operation Range
16	1.8 - 5.5V	ATmega165PA-AU ATmega165PA-AUR <sup>(4)</sup> ATmega165PA-MU ATmega165PA-MUR <sup>(4)</sup>	64A 64A 64M1 64M1	Industrial (-40°C to 85°C)


- Notes: 1. This device can also be supplied in wafer form. Please contact your local Atmel sales office for detailed ordering information and minimum quantities.
  - 2. Pb-free packaging, complies to the European Directive for Restriction of Hazardous Substances (RoHS directive). Also Halide free and fully Green.
  - 3. For Speed vs.  $V_{CC}$ , see Figure 27-1 on page 297.
  - 4. Tape & Reel

	Package Type
64A	64-Lead, Thin (1.0 mm) Plastic Gull Wing Quad Flat Package (TQFP)
64M1	64-pad, 9 x 9 x 1.0 mm body, lead pitch 0.50 mm, Quad Flat No-Lead/Micro Lead Frame Package (QFN/MLF)



# 8. Packaging Information

# 8.1 64A

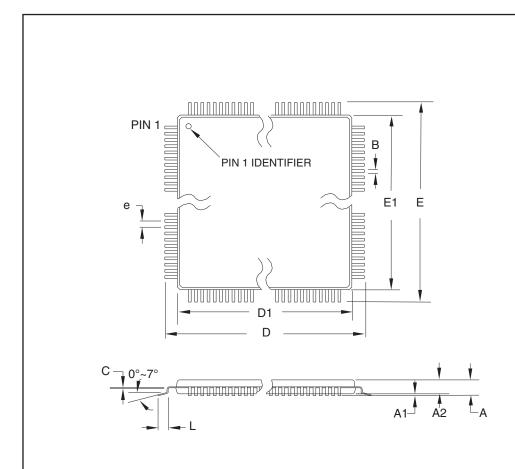

# COMMON DIMENSIONS (Unit of Measure = mm)

SYMBOL	MIN	NOM	MAX	NOTE
Α	_	_	1.20	
A1	0.05	_	0.15	
A2	0.95	1.00	1.05	
D	15.75	16.00	16.25	
D1	13.90	14.00	14.10	Note 2
Е	15.75	16.00	16.25	
E1	13.90	14.00	14.10	Note 2
В	0.30	_	0.45	
С	0.09	_	0.20	
L	0.45	_	0.75	
е		0.80 TYP		

### 10/5/2001

#### Notes

- 1. This package conforms to JEDEC reference MS-026, Variation AEB.
- Dimensions D1 and E1 do not include mold protrusion. Allowable protrusion is 0.25 mm per side. Dimensions D1 and E1 are maximum plastic body size dimensions including mold mismatch.
- 3. Lead coplanarity is 0.10 mm maximum.


TITLE
-------

**64A**, 64-lead, 14 x 14 mm Body Size, 1.0 mm Body Thickness, 0.8 mm Lead Pitch, Thin Profile Plastic Quad Flat Package (TQFP)

DRAWING NO.	REV.
64A	В



## 8.2 64M1

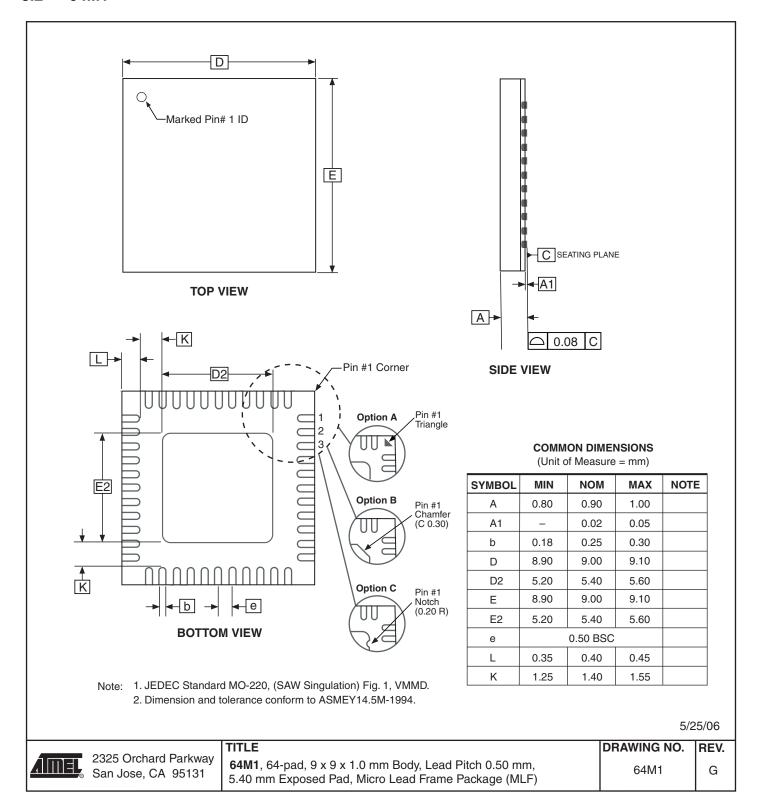

- 9. Errata
- 9.1 ATmega165PA Rev. G

No known errata.

9.2 ATmega165PA Rev. A to F

Not sampled.



# 10. Datasheet Revision History

Please note that the referring page numbers in this section are referring to this document. The referring revisions in this section are referring to the document revision.

# 10.1 8289A - 03/10

- 1. Initial revision (Based on the ATmega165P/V datasheet 8019I-AVR-08/07).
- 2. Changes done compared to ATmega165P/V datasheet 8019I-AVR-08/07:
  - New EIMSK and EIFR register overview
  - New graphics in "Typical Characteristics" on page 343.
  - Ordering Information includes Tape & Reel
  - New "Ordering Information" on page 379.





### Headquarters

Atmel Corporation

2325 Orchard Parkway San Jose, CA 95131 USA

Tel: 1(408) 441-0311 Fax: 1(408) 487-2600

#### International

Atmel Asia

Unit 1-5 & 16, 19/F BEA Tower, Millennium City 5 418 Kwun Tong Road Kwun Tong, Kowloon Hong Kong

Tel: (852) 2245-6100 Fax: (852) 2722-1369 Atmel Europe

Le Krebs 8, Rue Jean-Pierre Timbaud BP 309 78054 Saint-Quentin-en-Yvelines Cedex

France

Tel: (33) 1-30-60-70-00 Fax: (33) 1-30-60-71-11

Atmel Japan

9F, Tonetsu Shinkawa Bldg. 1-24-8 Shinkawa Chuo-ku, Tokyo 104-0033

Japan

Tel: (81) 3-3523-3551 Fax: (81) 3-3523-7581

#### **Product Contact**

Web Site

www.atmel.com

Technical Support

avr@atmel.com

Sales Contact

www.atmel.com/contacts

Literature Requests

www.atmel.com/literature

Disclaimer: The information in this document is provided in connection with Atmel products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Atmel products. EXCEPT AS SET FORTH IN ATMEL'S TERMS AND CONDITIONS OF SALE LOCATED ON ATMEL'S WEB SITE, ATMEL ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL ATMEL BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION, OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF ATMEL HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Atmel makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Atmel does not make any commitment to update the information contained herein. Unless specifically provided otherwise, Atmel products are not suitable for, and shall not be used in, automotive applications. Atmel's products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.

© 2010 Atmel Corporation. All rights reserved. Atmel<sup>®</sup>, Atmel logo and combinations thereof, AVR<sup>®</sup>, AVR<sup>®</sup> logo, and others are registered trademarks or trademarks of Atmel Corporation or its subsidiaries. Other terms and product names may be trademarks of others.