

LM384 5W Audio Power Amplifier

General Description


The LM384 is a power audio amplifier for consumer application. In order to hold system cost to a minimum, gain is internally fixed at 34 dB. A unique input stage allows inputs to be ground referenced. The output is automatically self-centering to one half the supply voltage.

The output is short-circuit proof with internal thermal limiting. The package outline is standard dual-in-line. A copper lead frame is used with the center three pins on either side comprising a heat sink. This makes the device easy to use in standard p-c layout.

Uses include simple phonograph amplifiers, intercoms, line drivers, teaching machine outputs, alarms, ultrasonic drivers, TV sound systems, AM-FM radio, sound projector systems, etc. See AN-69 for circuit details.

Features

- Wide supply voltage range
- Low quiescent power drain
- Voltage gain fixed at 50
- High peak current capability
- Input referenced to GND
- High input impedance
- Low distortion
- Quiescent output voltage is at one half of the supply voltage
- Standard dual-in-line package

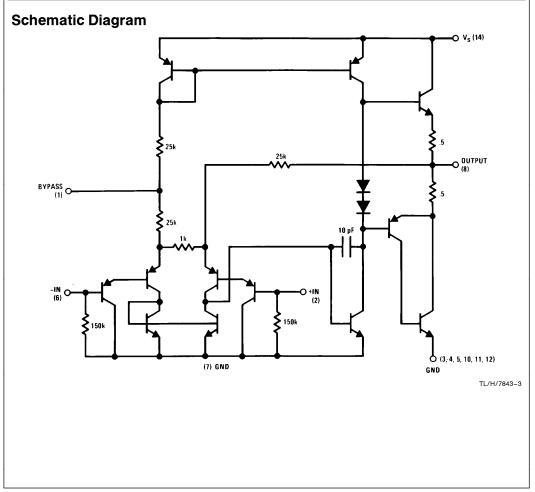

Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

 Supply Voltage
 28V

 Peak Current
 1.3A

 Power Dissipation (See Notes 3 and 4)
 1.67W

 Input Voltage
 ± 0.5V

 $\begin{array}{lll} \mbox{Storage Temperature} & -65^{\circ}\mbox{C to } +150^{\circ}\mbox{C} \\ \mbox{Operating Temperature} & 0^{\circ}\mbox{C to } +70^{\circ}\mbox{C} \\ \mbox{Lead Temperature (Soldering, 10 sec.)} & 260^{\circ}\mbox{C} \\ \mbox{Thermal Resistance} \end{array}$

 $\begin{array}{ccc} \theta_{
m JC} & 30^{\circ} {
m C/W} \\ \theta_{
m JA} & 79^{\circ} {
m C/W} \end{array}$

Electrical Characteristics (Note 1)

Symbol	Parameter	Conditions	Min	Тур	Max	Units
Z _{IN}	Input Resistance			150		kΩ
I _{BIAS}	Bias Current	Inputs Floating		100		nA
A_V	Gain		40	50	60	V/V
Pout	Output Power	THD = 10%, $R_L = 8\Omega$	5	5.5		W
IQ	Quiescent Supply Current			8.5	25	mA
V _{OUT Q}	Quiescent Output Voltage			11		٧
BW	Bandwidth	$P_{OUT} = 2W, R_L = 8\Omega$		450		kHz
V+	Supply Voltage		12		26	٧
I _{SC}	Short Circuit Current (Note 5)			1.3		А
PSRR _{RTO}	Power Supply Rejection Ratio (Note 2)			31		dB
THD	Total Harmonic Distortion	$P_{OUT} = 4W, R_L = 8\Omega$		0.25	1.0	%

Note 1: $V^+ = 22V$ and $T_A = 25^{\circ}C$ operating with a Staver V7 heat sink for 30 seconds.

Note 2: Rejection ratio referred to the output with $C_{BYPASS}=5~\mu F$, freq = 120 Hz.

Note 3: The maximum junction temperature of the LM384 is 150°C.


Note 4: The package is to be derated at 15°C/W junction to heat sink pins.


Note 5: Output is fully protected against a shorted speaker condition at all voltages up to 22V.


Heat Sink Dimensions


Staver Company 41 Saxon Ave. P.O. Drawer H Bay Shore, N.Y. Tel: (516) 666-8000 Staver "V7" Heat Sink


Typical Performance Characteristics



























Block and Connection Diagrams Dual-In-Line Package NON-INVERTING INPUT 2 - 13 NC INPUT 11 GND * 3, 4, 5 10, 11, 12 INVERTING INPUT 6 GND GND TL/H/7843-1 *Heatsink Pins TL/H/7843-2 **Top View** Order Number LM384N See NS Package Number N14A **Typical Applications Typical 5W Amplifier** TL/H/7843-6 **Bridge Amplifier** LM384


Typical Applications (Continued) Intercom LISTEN *For stability with high current loads

Phase Shift Oscillator

TL/H/7843-8

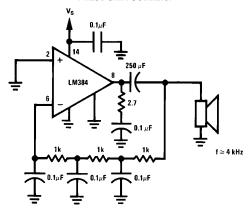

Physical Dimensions inches (millimeters)

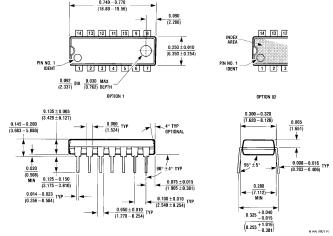

Molded Dual-In-Line Package (N) Order Number LM384N NS Package Number N14A

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation 1111 West Bardin Road Arlington, TX 76017 Tel: 1(800) 272-9959 Fax: 1(800) 737-7018 National Semiconductor Europe

Fax: (+49) 0-180-530 85 86 Email: cnjwge@tevm2.nsc.com Deutsch Tel: (+49) 0-180-530 85 85 English Tel: (+49) 0-180-532 78 32 Français Tel: (+49) 0-180-532 93 58 Italiano Tel: (+49) 0-180-534 16 80 National Semiconductor Hong Kong Ltd. 13th Floor, Straight Block, Ocean Centre, 5 Canton Rd. Tsimshatsui, Kowloon Hong Kong Tel: (852) 2737-1600 Fax: (852) 2736-9960 National Semiconductor Japan Ltd. Tel: 81-043-299-2309 Fax: 81-043-299-2408