



CYPRESS

B9949

3.3V 160-MHz 1:15 Clock Distribution Buffer

Features

- 160MHz Clock Support
- LVPECL or LVC MOS/LVTTL Clock Input
- LVC MOS/LVTTL Compatible Inputs
- 15 Clock Outputs: Drive up to 30 Clock Lines
- 1X and 1/2X Configurable Outputs
- Output Three-state Control
- 350 ps Maximum Output-to-Output Skew
- Pin Compatible with MPC949
- Industrial Temp. Range: -40°C to +85°C
- 52-Pin TQFP Package


Description


The B9949 is a low-voltage clock distribution buffer with the capability to select either a differential LVPECL or LVC MOS/LVTTL compatible input clocks. These clock sources can be used to provide for test clocks as well as the primary system clocks. All other control inputs are LVC MOS/LVTTL compatible. The 15 outputs are 3.3V LVC MOS or LVTTL compatible and can drive two series terminated 50Ω transmission lines. With this capability the B9949 has an effective fan-out of 1:30.

The B9949 is capable of generating 1X and 1/2X signals from a 1X source. These signals are generated and retimed internally to ensure minimal skew between the 1X and 1/2X signals. SEL(A:D) inputs allow flexibility in selecting the ratio of 1X to 1/2X outputs.

The B9949 outputs can also be three-stated via MR/OE# input. When MR/OE# is set HIGH, it resets the internal flip-flops and three-states the outputs.

Block Diagram

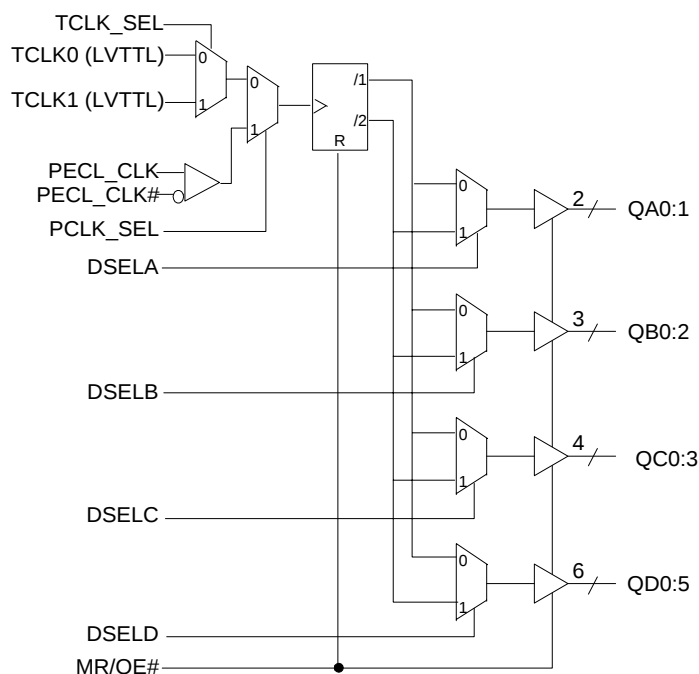

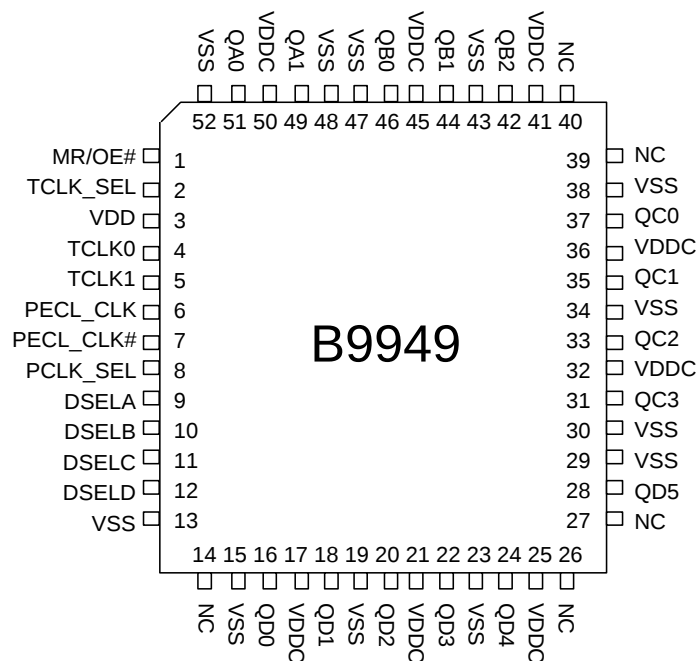Pin Configuration


Pin Description ^[1]

Pin	Name	PWR	I/O	Description
6	PECL_CLK		I, PD	PECL Input Clock.
7	PECL_CLK#		I, PU	PECL Input Clock.
4, 5	TCLK(0,1)		I, PU	External Reference/Test Clock Input.
49, 51	QA(1,0)	VDDC	O	Clock Outputs.
42, 44, 46	QB(2:0)	VDDC	O	Clock Outputs.
31, 33, 35, 37	QC(3:0)	VDDC	O	Clock Outputs.
16, 18, 20, 22, 24, 28	QD(5:0)	VDDC	O	Clock Outputs.
9, 10, 11, 12	DSEL(A:D)		I, PD	Divider Select Inputs. When HIGH, selects ÷2 input divider. When LOW, selects ÷1 input divider.
2	TCLK_SEL		I, PD	TCLK Select Input. When LOW, TCLK0 clock is selected and when HIGH TCLK1 is selected.
8	PCLK_SEL		I, PD	PECL Select Input. When HIGH, PECL clock is selected and when LOW TCLK(0,1) is selected
1	MR_OE#		I, PD	Output Enable Input. When asserted LOW, the outputs are enabled and when asserted HIGH, internal flip-flops are reset and the outputs are three-stated.
17, 21, 25, 32, 36, 41, 45, 50	VDDC			3.3V Power Supply for Output Clock Buffers.
3	VDD			3.3V Power Supply
13, 15, 19, 23, 29, 30, 34, 38, 43, 47, 48, 52	VSS			Common Ground
14, 26, 27, 39, 40,	NC			Not Connected

Note:

1. PD = Internal Pull-Down, PU = Internal Pull-Up.

Maximum Ratings

Maximum Input Voltage Relative to V_{SS} : $V_{SS} - 0.3V$
 Maximum Input Voltage Relative to V_{DD} : $V_{DD} + 0.3V$
 Storage Temperature: $-65^{\circ}C$ to $+150^{\circ}C$
 Operating Temperature: $-40^{\circ}C$ to $+85^{\circ}C$
 Maximum ESD protection 2KV
 Maximum Power Supply: 5.5V
 Maximum Input Current: $\pm 20mA$

This device contains circuitry to protect the inputs against damage due to high static voltages or electric field; however, precautions should be taken to avoid application of any voltage higher than the maximum rated voltages to this circuit. For proper operation, V_{in} and V_{out} should be constrained to the range:

$$V_{SS} < (V_{in} \text{ or } V_{out}) < V_{DD}$$

Unused inputs must always be tied to an appropriate logic voltage level (either V_{SS} or V_{DD}).

DC Parameters: $V_{DDC} = 3.3V \pm 5\%$, $V_{DD} = 3.3V \pm 5\%$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$

Parameter	Description	Conditions	Min.	Typ.	Max.	Unit
V_{IL}	Input Low Voltage	PECL_CLK, Single Ended	1.49		1.825	V
		All other inputs	V_{SS}		0.8	
V_{IH}	Input High Voltage	PECL_CLK, Single Ended	2.135		2.42	V
		All other inputs	2.0		V_{DD}	
I_{IL}	Input Low Current (@ $V_{IL} = V_{SS}$)	Note 2			-100	μA
I_{IH}	Input High Current (@ $V_{IL} = V_{DD}$)				100	μA
V_{PP}	Peak-to-Peak Input Voltage PECL_CLK	Note 3	300		1000	mV
V_{CMR}	Common Mode Range PECL_CLK		$V_{DD} - 2.0$		$V_{DD} - 0.6$	V
V_{OL}	Output Low Voltage	$I_{OL} = 20 \text{ mA}$, Note 4			0.4	V
V_{OH}	Output High Voltage	$I_{OH} = -20 \text{ mA}$, $V_{DDC} = 3.3V$, Note 4	2.5			V
I_{DD}	Quiescent Supply Current	All V_{DDC} and V_{DD}		1	2	mA
C_{in}	Input Capacitance				4	pF

Notes:


- Inputs have pull-up/pull-down resistors that effect input current.
- The V_{CMR} is the difference from the most positive side of the differential input signal. Normal operation is obtained when the "High" input is within the V_{CMR} range and the input lies within the V_{PP} specification.
- Driving series or parallel terminated 50 Ω (or 50 Ω to $V_{DD}/2$) transmission lines.

AC Parameters^[5]: $V_{DDC} = 3.3V \pm 5\%$, $V_{DD} = 3.3V \pm 5\%$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$

Parameter	Description	Conditions	Min.	Typ.	Max.	Unit
Fmax	Maximum Input Frequency ^[6]		160			MHz
Tpd	PECL_CLK to Q Delay ^[6]		4.0	-	8.6	ns
	TCLK to Q Delay ^[6]		4.2	-	10.5	
FoutDC	Output Duty Cycle ^[6, 7]	Measured at $V_{DDC}/2$	$TCYCLE/2 - 1$		$TCYCLE/2 + 1$	ns
tpZL, tpZH	Output Enable Time (all outputs)		2		10	ns
tpLZ, tpHZ	Output Disable Time (all outputs)		2		10	ns
Tskew	Output-to-Output Skew ^[6, 8]	$F_{in} < 130MHz$			350	ps
Tskew (pp)	Part-to-Part Skew ^[9]	PECL_CLK to Q		1.5	2.75	ns
		TCLK to Q		2.0	4.0	
Tr/Tf	Output Clocks Rise/Fall Time ^[8]	0.8V to 2.0V	0.10		1.0	ns

Notes:

5. Parameters are guaranteed by design and characterization. Not 100% tested in production. All parameters specified with loaded outputs.
6. Outputs driving 50Ω transmission lines.
7. 50% input duty cycle.
8. Outputs loaded with 30 pF each
9. Part-to-Part Skew at a given temperature and voltage

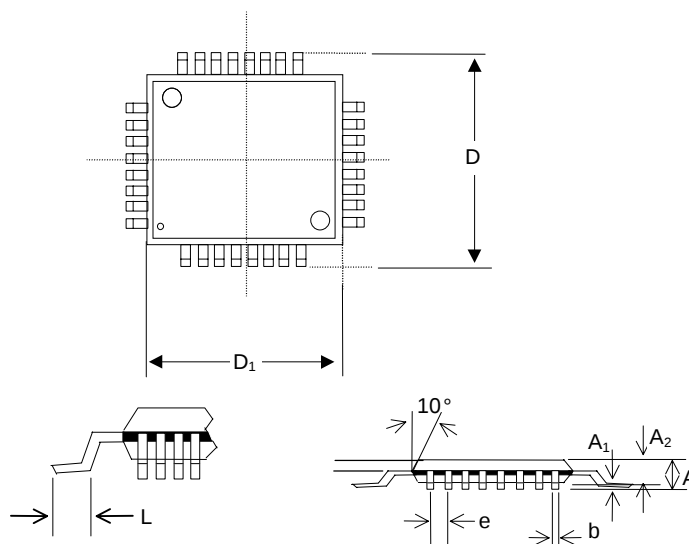Package Drawing and Dimensions (52 TQFP)

52-Pin TQFP Outline Dimensions

Symbol	Inches			Millimeters		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	-	-	0.047	-	-	1.20
A ₁	0.002	-	0.006	0.05	-	0.15
A ₂	0.037	-	0.041	0.95	-	1.05
D	-	0.472	-	-	12.00	-
D ₁	-	0.394	-	-	10.00	-
b	0.009	-	0.015	0.22	-	0.38
e	0.026 BSC			0.65 BSC		
L	0.018	-	0.030	0.45	-	0.75


Ordering Information

Part Number	Package Type	Production Flow
B9949CA ^[10]	52 PIN TQFP	Industrial, –40°C to +85°C

Note:

10. The ordering part number is formed by a combination of device number, device revision, package style, and screening as shown below.

Marking: Example: Cypress
B9949CA,
Date Code, Lot #

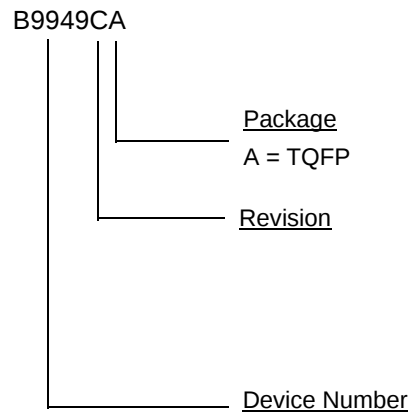

Document Title: B9949 3.3V, 160-MHz, 1:15 Clock Distribution Buffer
Document Number: 38-07081

Rev.	ECN No.	Issue Date	Orig. of Change	Description of Change
**	107117	06/06/01	IKA	Convert from IMI to Cypress
*A	108062	07/03/01	NDP	Changed Commercial to Industrial
*B	109807	02/01/02	DSG	Convert from Word Doc to Adobe Framemaker