

**SANYO****DBF40T**

Silicon Diffused Junction Type

**4.0A Single-Phase Bridge Rectifier****Applications**

- For primary rectification as switching regulator.


**Features**

- High reliability attained glass passivation.
- High surge.
- Plastic molded structure.
- Peak reverse voltage:  $V_{RM}=200$  to  $600V$ .
- Average rectified current:  $I_O=4.0A$ .

**Package Dimensions**

unit:mm

1203

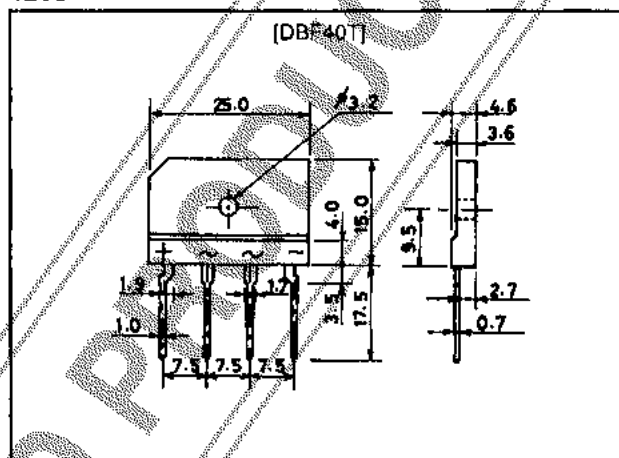
**Specifications**Absolute Maximum Ratings at  $T_a = 25^\circ C$ 

Parameter	Symbol	Conditions	DBF40TC	DBF40TE	DBF40TG	Unit
Peak Reverse Voltage	$V_{RM}$		200	400	600	V
Average Rectified Current	$I_O$	$T_c=108^\circ C$ , with $88 \times 80 \times 1.5 mm^3$ Al fin	→	→	4.0	A
		$T_a=25^\circ C$ , without fin	→	→	2.3	A
Surge Forward Current	$I_{FSM}$	50Hz sine wave, 1 cycle	→	→	120	A
Junction Temperature	$T_j$		→	→	150	$^\circ C$
Storage Temperature	$T_{stg}$		→	→	-40 to +150	$^\circ C$

Electrical Characteristics at  $T_a = 25^\circ C$ , per constituent element of bridge.

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Forward Voltage	$V_F$	$I_F=2.0A$			1.05	V
Reverse Current	$I_R$	$V_R$ At each $V_{RM}$			10	$\mu A$
Thermal Resistance (Junction-Ambient)	$R_{th(j-a)}$	Without fin			30	$^\circ C/W$
Thermal Resistance (Junction-Case)	$R_{th(j-c)}$	With Al fin			5.5	$^\circ C/W$






Note: Mounting torque: 5kg·cm·max

**Electrical Connection****SANYO Electric Co., Ltd. Semiconductor Business Headquarters**

TOKYO OFFICE, Tokyo Bldg., 1-10, Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

52098HA (KT)/N120MH (KOTO) No.3403-1/2

# DBF40T

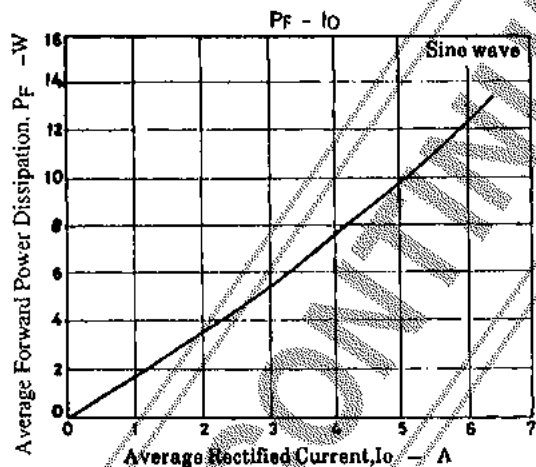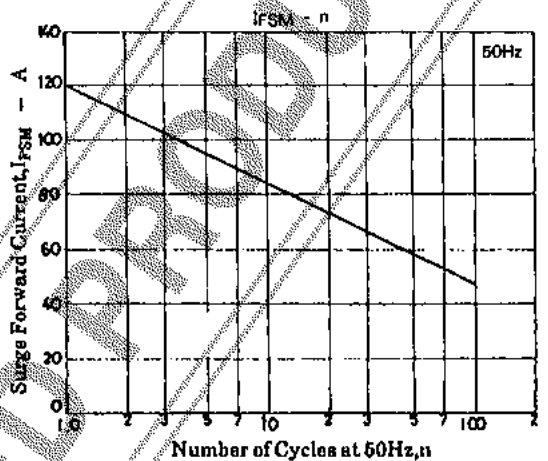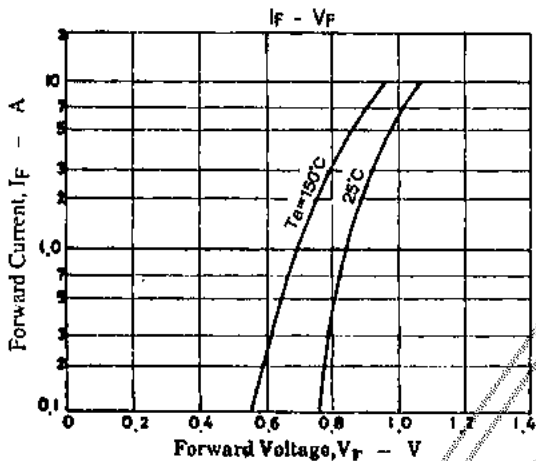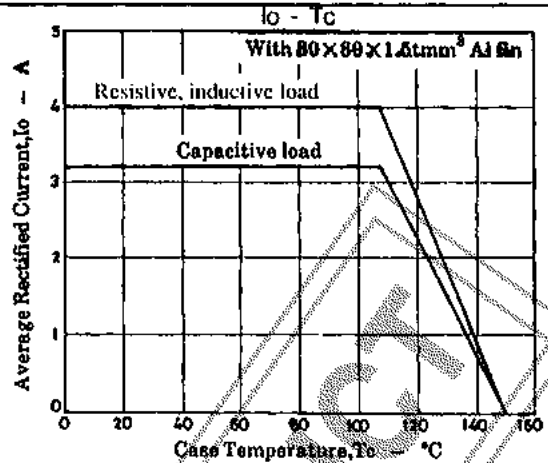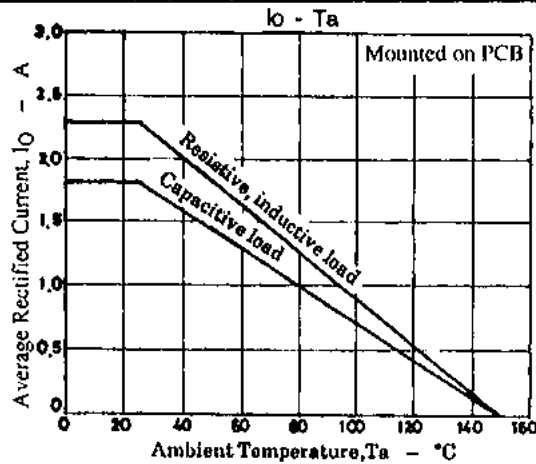

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:

- ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
- ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of May, 1998. Specifications and information herein are subject to change without notice.