


24- TO 40-PIN DIP (600 MIL)

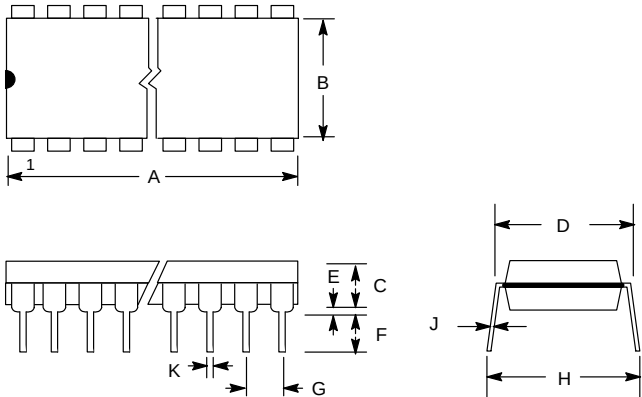

PKG	24-PIN		28-PIN		40-PIN	
DIM	MIN	MAX	MIN	MAX	MIN	MAX
A IN. MM	1.245 31.62	1.270 32.25	1.445 36.70	1.470 37.34	2.050 52.07	2.075 52.71
B IN. MM	0.530 13.46	0.550 13.97	0.530 13.46	0.550 13.97	0.530 13.46	0.550 13.97
C IN. MM	0.140 3.56	0.160 4.06	0.140 3.56	0.160 4.06	0.140 3.56	0.160 4.06
D IN. MM	0.600 15.24	0.625 15.88	0.600 15.24	0.625 15.88	0.600 15.24	0.625 15.88
E IN. MM	0.015 0.380	0.050 1.27	0.015 0.380	0.040 1.02	0.015 0.380	0.040 1.02
F IN. MM	0.120 3.05	0.145 3.68	0.120 3.05	0.145 3.68	0.120 3.05	0.145 3.68
G IN. MM	0.090 2.29	0.110 2.79	0.090 2.29	0.110 2.79	0.090 2.29	0.110 2.79
H IN. MM	0.625 15.88	0.675 17.15	0.625 15.88	0.675 17.15	0.625 15.88	0.675 17.15
J IN. MM	0.008 0.20	0.012 0.30	0.008 0.20	0.012 0.30	0.008 0.20	0.012 0.30
K IN. MM	0.015 0.38	0.022 0.56	0.015 0.38	0.022 0.56	0.015 0.38	0.022 0.56