




INDEX AREA




- 1 DIMENSIONS D AND E1 INCLUDE MOLD MISMATCH, BUT DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.254 MM PER SIDE.
- 2 SECTION A-A DIMENSIONS APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN 0.13 TO 0.25 MM FROM THE LEAD TIP.
- 3 THE CHAMFER ON THE BODY IS OPTIONAL. IF IT IS NOT PRESENT, A VISUAL INDEX FEATURE MUST BE LOCATED WITHIN THE CROSS-HATCHED AREA.

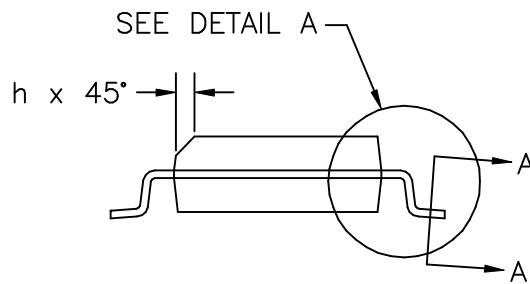


SECTION A-A

DIM	MIN	MAX
A	2.44	2.64
A1	0.12	—
b	0.29	0.43
c	0.23	0.32
D	15.20	15.54
E	10.11	10.52
E1	7.40	7.60
e	0.80	BSC
h	0.25	0.71
L	0.51	1.02

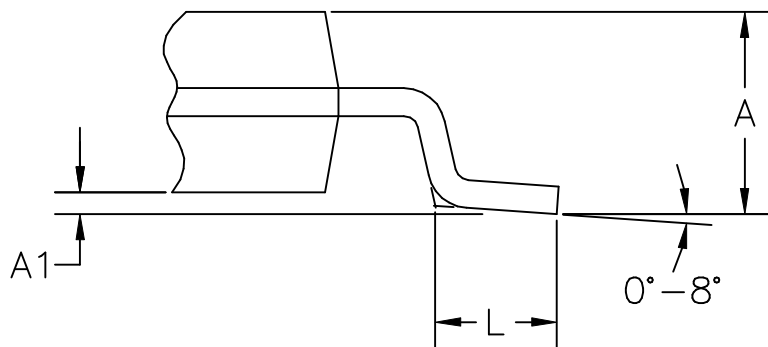

DETAIL A

DIMENSIONS ARE IN MILLIMETERS

SIGNATURE		DATE		 Dallas Semiconductor	
DOC. CONTROL:					
ENGR. MGR:					
MFG. ENGR:					
CHECKED BY:				TITLE	
DRAWN BY:				MARKETING OUTLINE, 36 LEAD SSOP 7.5 MM BODY, .80 MM LEAD PITCH	
		SIZE A	FSCM NO	PART NO.	REV A
DO NOT SCALE DWG.		SCALE N/A		SHEET 1 OF 1	