

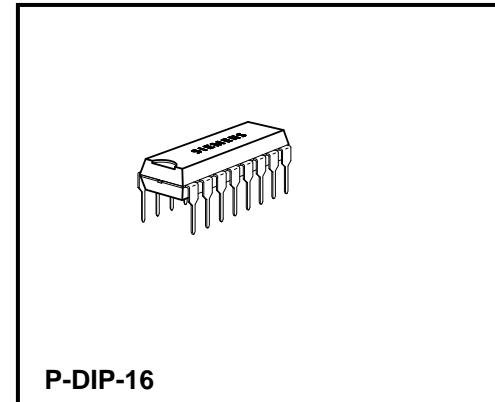
Dual Sound FM IF Amplifier

TBA 229-5

Bipolar IC

Features

- High AM suppression over a very wide input voltage range
- High sensitivity
- Very high symmetry



The component contains two separate limiter amplifiers with FM demodulators and separate AF outputs.

Type	Ordering Code	Package
TBA 229-5	Q67000-A5133	P-DIP-16

Circuit Description

The component contains two separate FM sound IF sections for television stereo applications or for multistandard receivers. Each FM section consists of an eight-stage symmetrical limiter amplifier followed by a coincidence demodulator and an AF pre-amplifier with a low-ohmic output. The component features considerably improved AM suppression characteristics with small input signals, as well as a very low frequency deviation between THD_{min} and AM_{min} .

Absolute Maximum Ratings

Parameter	Symbol	Limit Values		Unit
		min.	max.	
Supply voltage	V_s	0	16	V
Reference current	I_{REF}	0	2	mA
IF input voltage	$V_{I\text{ IF rms}}$	0	600	mV
DC voltages	$V_{9, 10, 11}$ $V_{14, 15, 16}$	0 0	V_{REF} V_{REF}	V V
DC currents	$I_{1, 2, 4, 5, 7, 8}$	0	2	mA
Junction temperature	T_j		150	°C
Storage temperature range	T_{stg}	-40	125	°C
Thermal resistance (system-air)	$R_{th\text{ SA}}$		80	K/W

Operating Range

Supply voltage	V_s	10.5	15.75	V
Ambient temperature	T_A	0	70	°C
Frequency	f_I	0.1	12	MHz

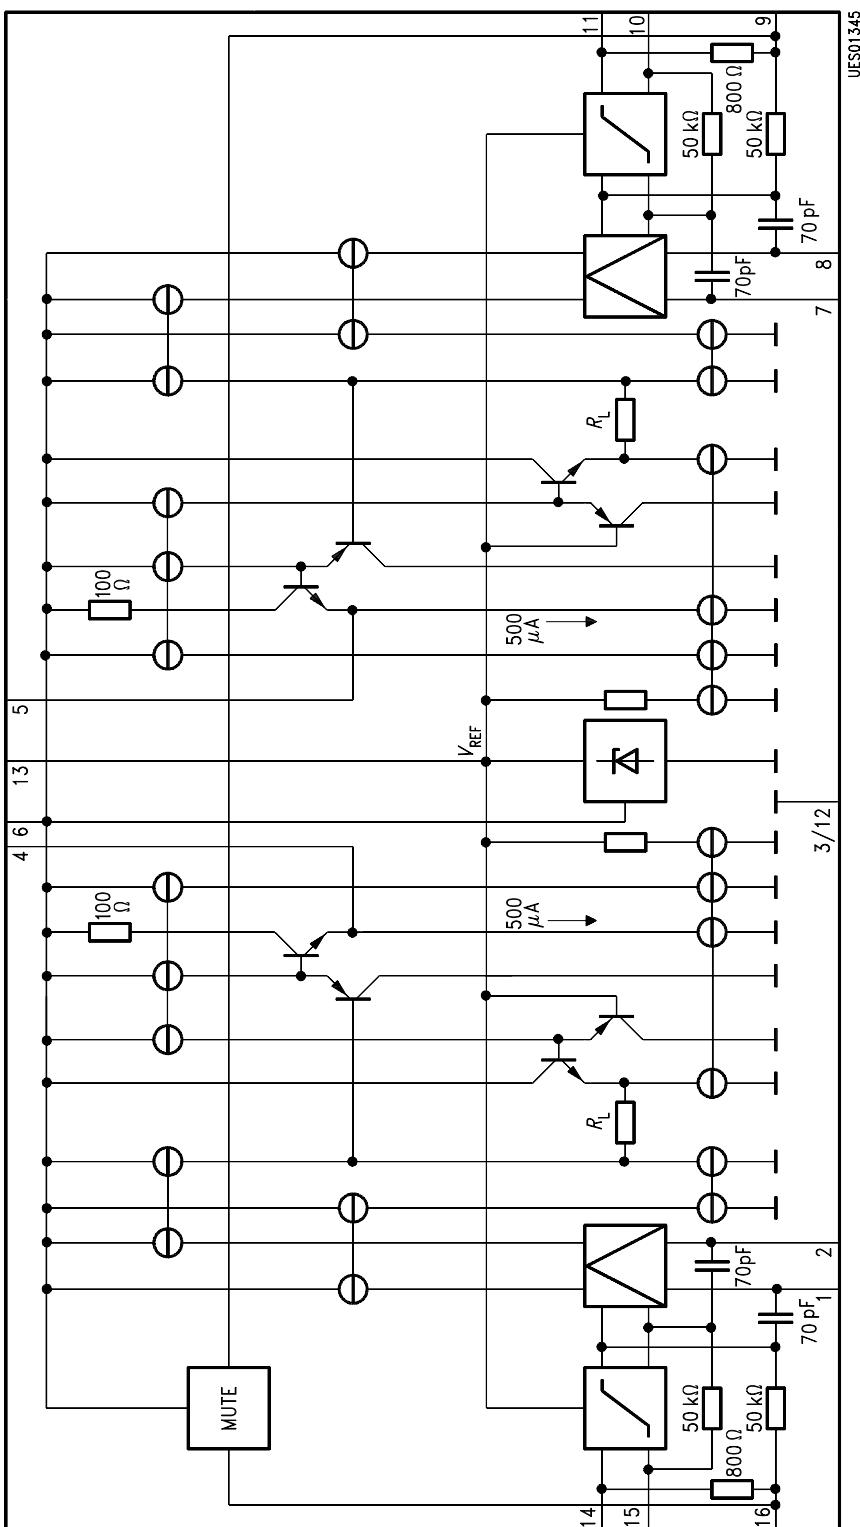
Characteristics

$V_s = 12 \text{ V}$; $T_A = 25^\circ\text{C}$; $V_{I\text{ IF}14\text{ rms}} = 10 \text{ mV}$; $f_{I\text{ IF}11,14} = 5.5 \text{ MHz}$; $f_{\text{mod}} = 1 \text{ kHz}$; $\Delta f = \pm 30 \text{ kHz}$
(if not stated otherwise)

Parameter	Symbol	Limit Values			Unit	Test Condition
		min.	typ.	max.		
Current consumption	I_s	25	35	42	mA	
Input voltage for limiter threshold	$V_{I11\text{ rms}}$ $V_{I14\text{ rms}}$		50 50	100 100	μV μV	$V_{Q4,5} = -3 \text{ dB}$
Output voltage	$V_{Q4\text{ rms}}$ $V_{Q5\text{ rms}}$	510 510	600 600	700 700	mV mV	
DC voltage portion	$V_{Q4} =$ $V_{Q5} =$	4.8 4.8	6 6	6.2 6.2	V V	$\Delta f = 0$; $THD = THD \text{ min}$
Total harmonic distortion	THD_4, THD_5		0.4	0.8	%	$THD = THD \text{ min}$
AM suppression $V_{i\text{ rms}} = 1 \text{ mV}; m = 30\%$	α_{AM4} α_{AM5}	55 55	60 60		dB dB	$V_{i\text{ rms}} = 1 \text{ mV}; m = 30\%$
Cross-talk rejection	$C_{IF1-2} = V_{Q4}/V_{Q5}$ $C_{IF1-2} = V_{Q4}/V_{Q5}$	60			dB dB	$f_{I\text{ IF}11} = 5.5 \text{ MHz}; \Delta f_{11} = 0 \text{ kHz}$ $V_{I11\text{ rms}} = 4 \text{ mV}; V_{I14\text{ rms}} = 10 \text{ mV}$ $f_{I\text{ IF}11} = 5.74 \text{ MHz}; \Delta f_{14} = 0 \text{ kHz}$ $V_{I11\text{ rms}} = 4 \text{ mV}; V_{I14\text{ rms}} = 10 \text{ mV}$
Reference voltage	$V_{13} =$	5.4	6	6.6	V	
Switching voltage muting ON (AF off) OFF	V_{16} V_{16}	8 0		V_s 3	V V	

Design-Related Values

Input resistance	$R_{I1,2}$ $R_{I7,8}$	20 20			$\text{k}\Omega$ $\text{k}\Omega$	
Output resistance	$R_{Q4,5}$			100	Ω	
Input impedance	$Z_{I11,14}$		800		Ω	
IF residual voltage	$V_{Q4,5\text{ (IF)}}$		15		mV	
Hum suppression	$\alpha_{Q\text{ hum}}$		32		dB	$f_s = 100 \text{ Hz}$ $\Delta V_s \text{ rms} = 500 \text{ mV}; V_s/V_{Q4}; V_s/V_{Q5}$
Frequency deviation $AM \text{ min} - THD \text{ min}$	Δf_{IF}		± 10		kHz	

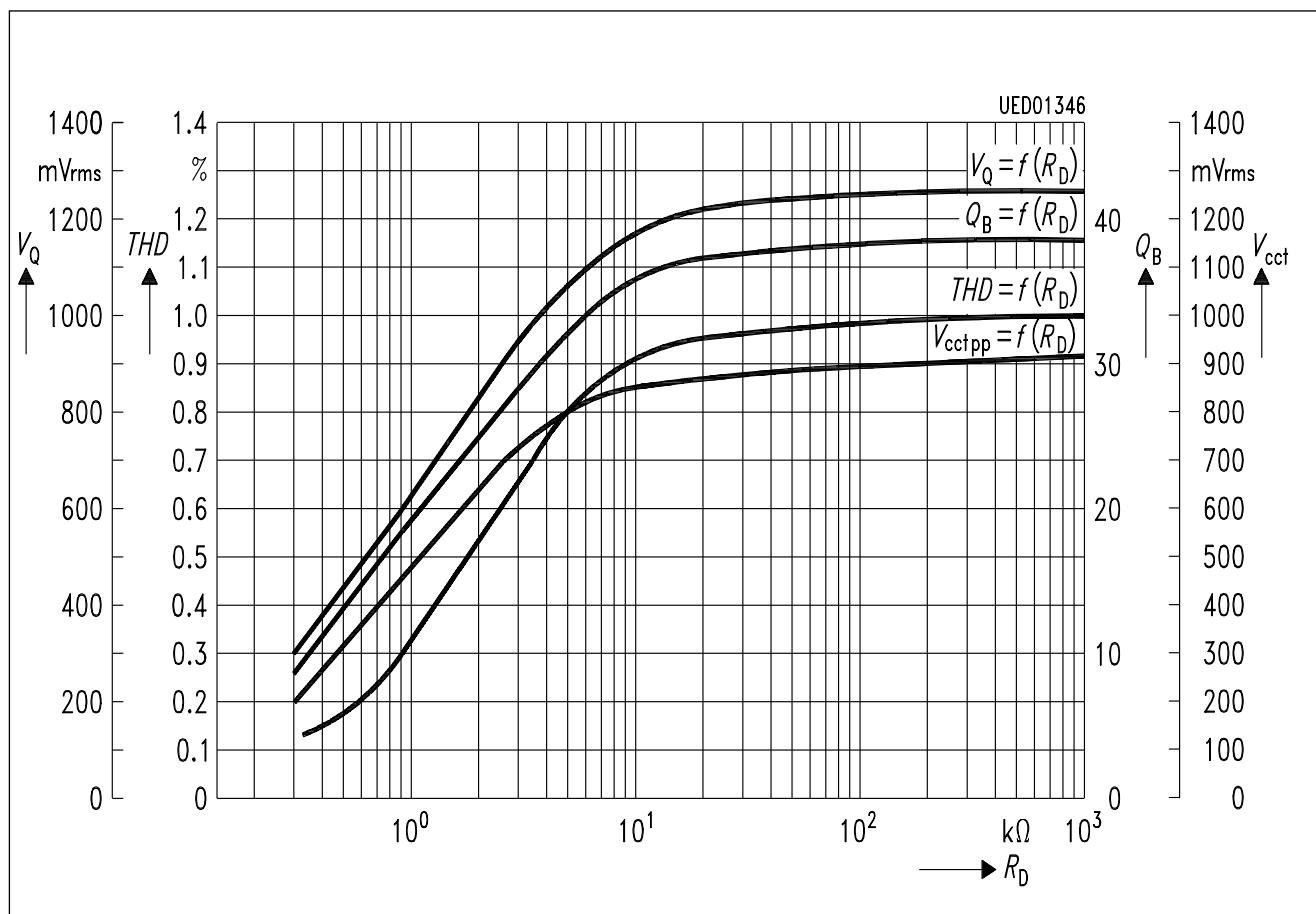


Block Diagram

Pin Functions

Pin No.	Function
1, 2	Demodulator tank circuit connection IF 1 (high impedance input – slope of S-curve can be determined by external resistor between pins 1 and 2)
3	GND
4	AF output IF 1 (emitter follower)
5	AF output IF 2 (emitter follower)
6	Supply voltage
7, 8	Demodulator tank circuit connection IF 2 (high impedance input – slope of S-curve can be determined by external resistor between pins 1 and 2)
9	Operating point feedback of limiter amplifier and low end IF 2 (RF decoupling of IF amplifiers with appropriate capacitors is required!)
10	Operating point feedback of limiter amplifier IF 2 (RF decoupling of IF amplifiers with appropriate capacitors is required!)
11	IF 2 input (input of limiter amplifier IF 2; internal resistor between pins 9 and 11 is typ. 800 Ω)
12	GND
13	Internal reference voltage (typ. 6 V)
14	IF 1 input (input of limiter amplifier IF 2; internal resistor between pins 14 and 15 is typ. 800 Ω)
15	Operating feedback of limiter amplifier IF 1 (RF decoupling of IF amplifiers with appropriate capacitors is required!)
16	Operating point feedback of limiter amplifier and low end IF 1 (RF decoupling of IF amplifiers with appropriate capacitors is required!)

Diagrams

AF Output Voltage, Total Harmonic Distortion,
Circuit Voltage versus Circuit Q_B 

V_Q : V_Q 4 rms; V_Q 5 rms

THD : THD 4; THD 5

Measured at: $f_{I\text{ IF}} = 5.5$ MHz; $\Delta f = 30$ kHz; $f_{\text{mod}} = 1$ kHz; $V_{I\text{ IF}} = 10$ mV

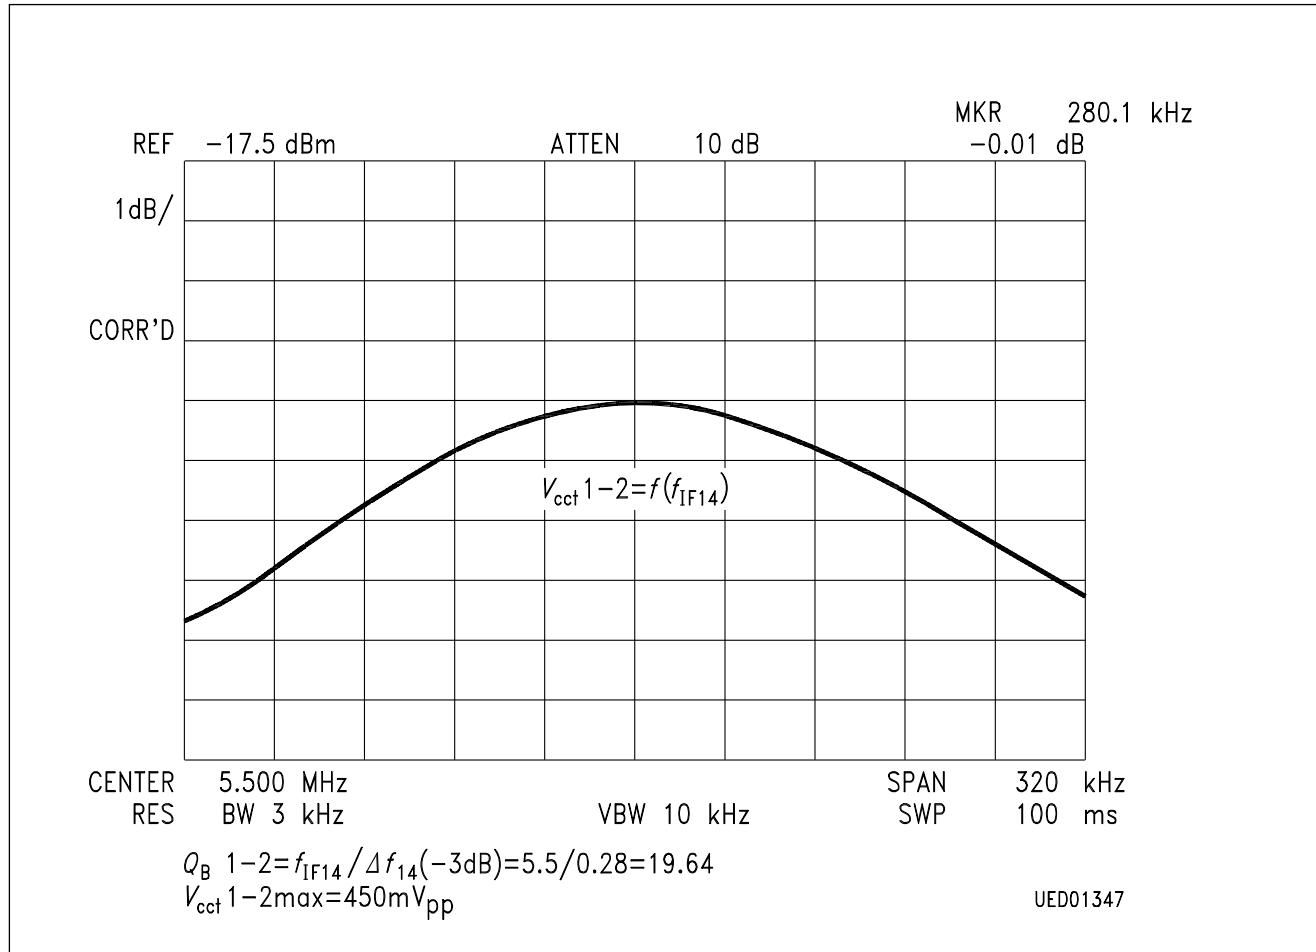
V_{cct} : $V_{1,2} = V_{7,8}$

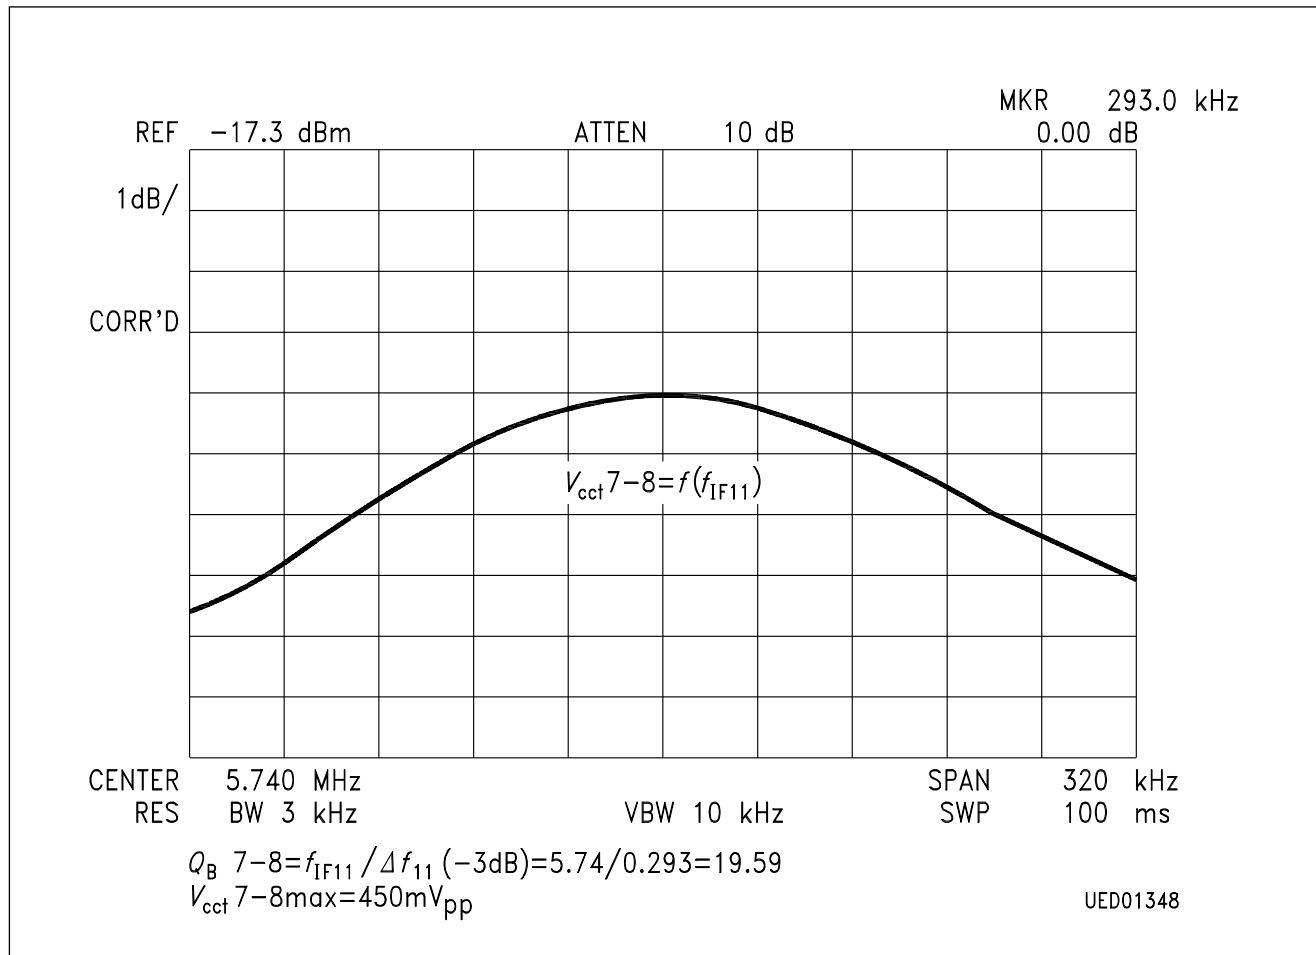
Measured at: $f_{I\text{ IF}} = 5.5$ MHz; $\Delta f = 0$ kHz; $V_{I\text{ IF}} = 10$ mV

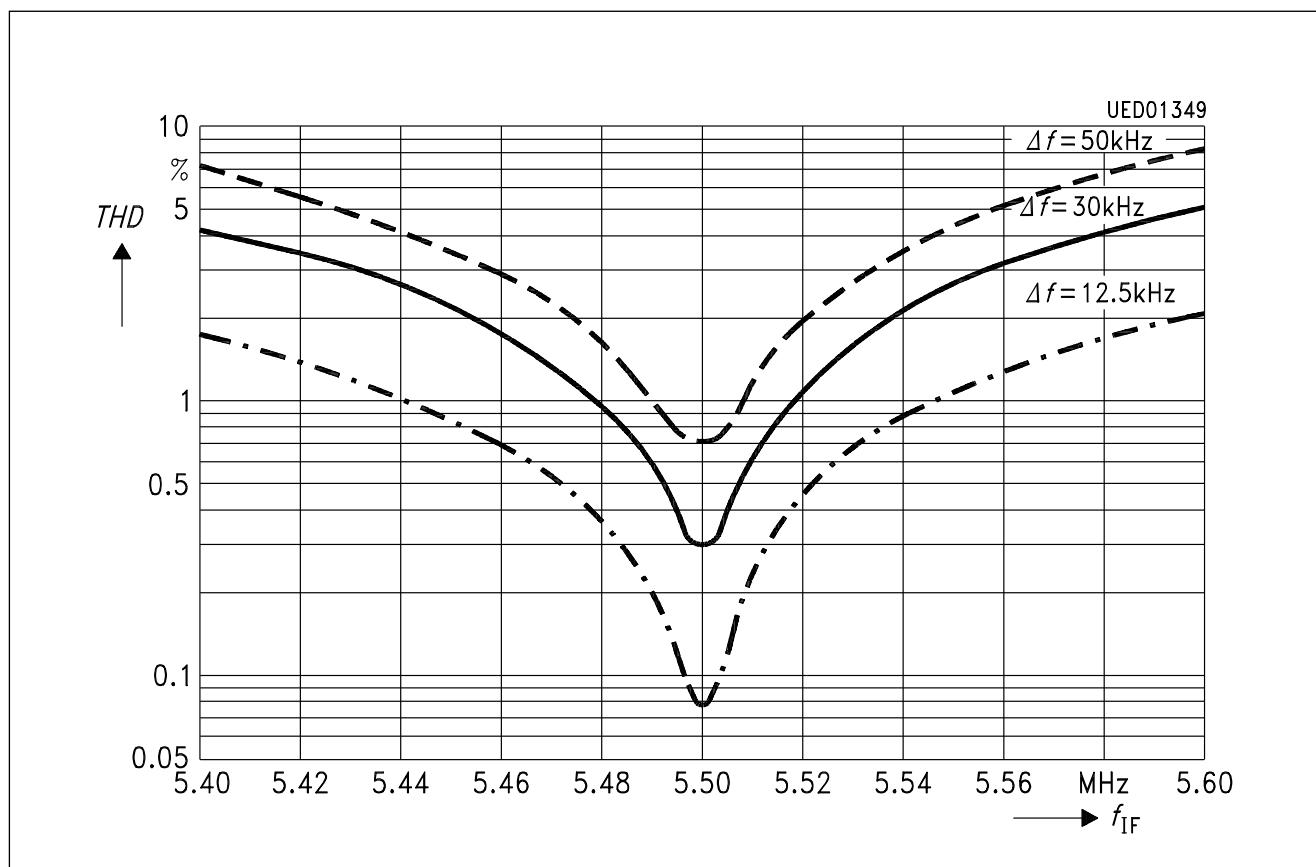
Q_B : Q between connections 1, 2 and 7, 8

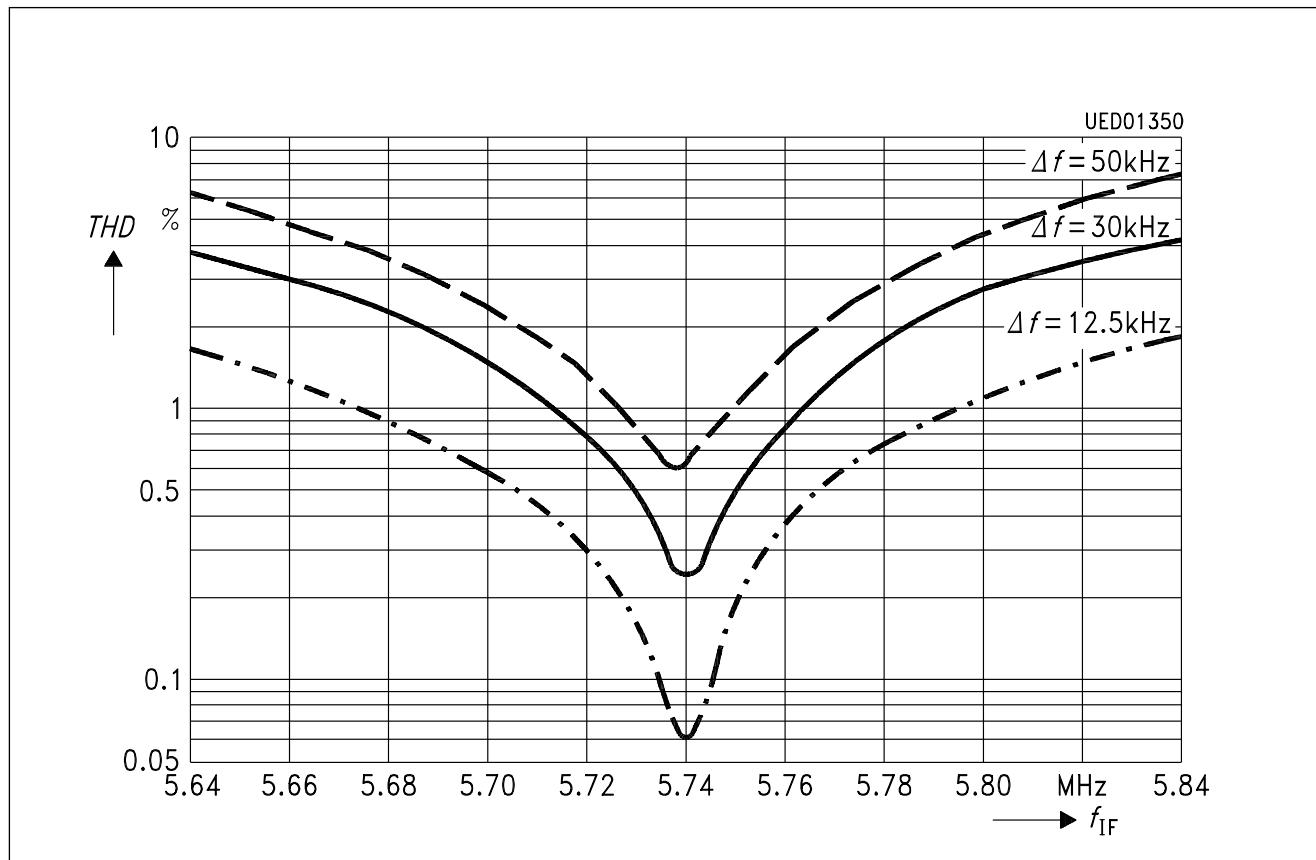
Measured at: $f_{I\text{ IF}} = 5.5$ MHz/ $\Delta f_{I\text{ IF}}$ for 3 dB bandwidth, $\Delta f = 0$ kHz; $V_{I\text{ IF}} = 10$ mV

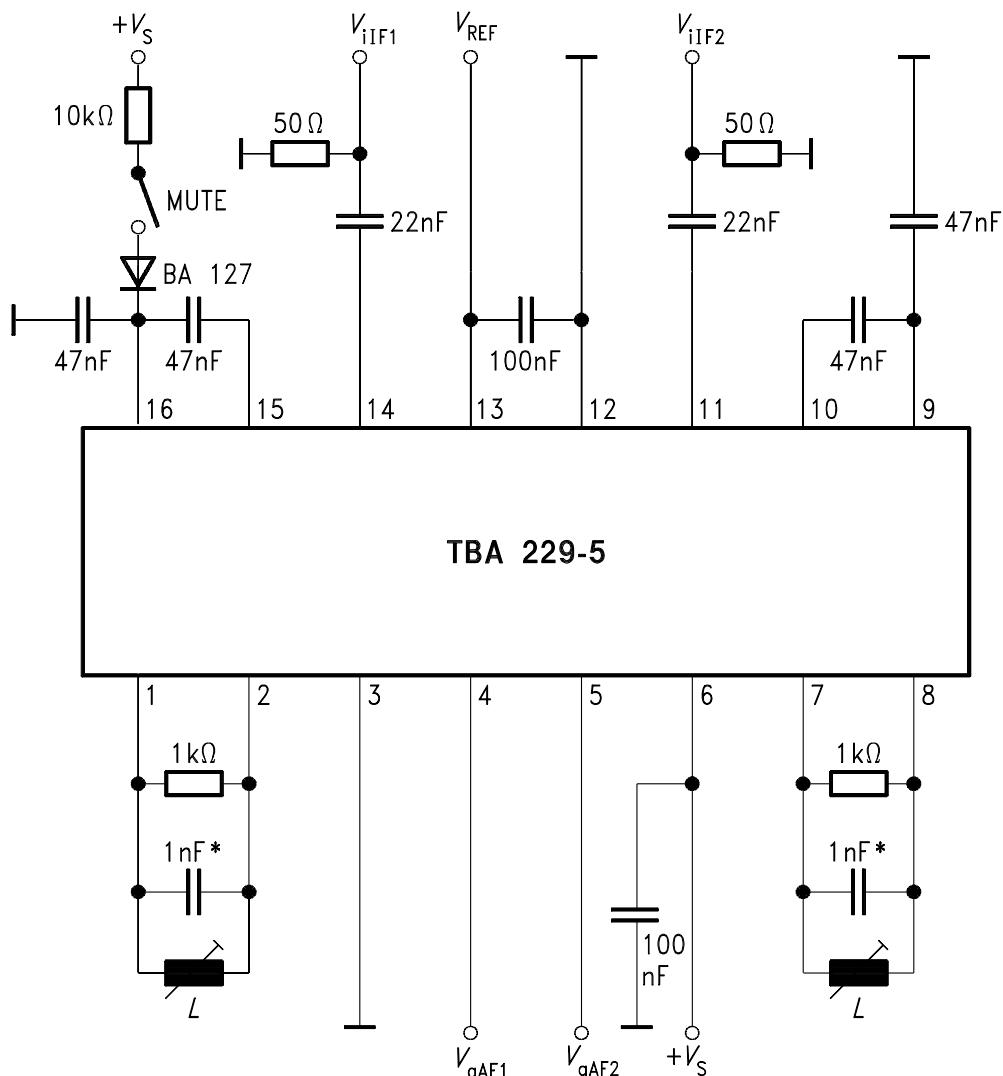
Circuit: $L = 10$ turns 0.25 CuL; Vogt Coil Assembly 517 12 000 00 without cap
 $C = 1$ nF STYROFLEX Capacitor

Tank Voltage versus f_{IF} 

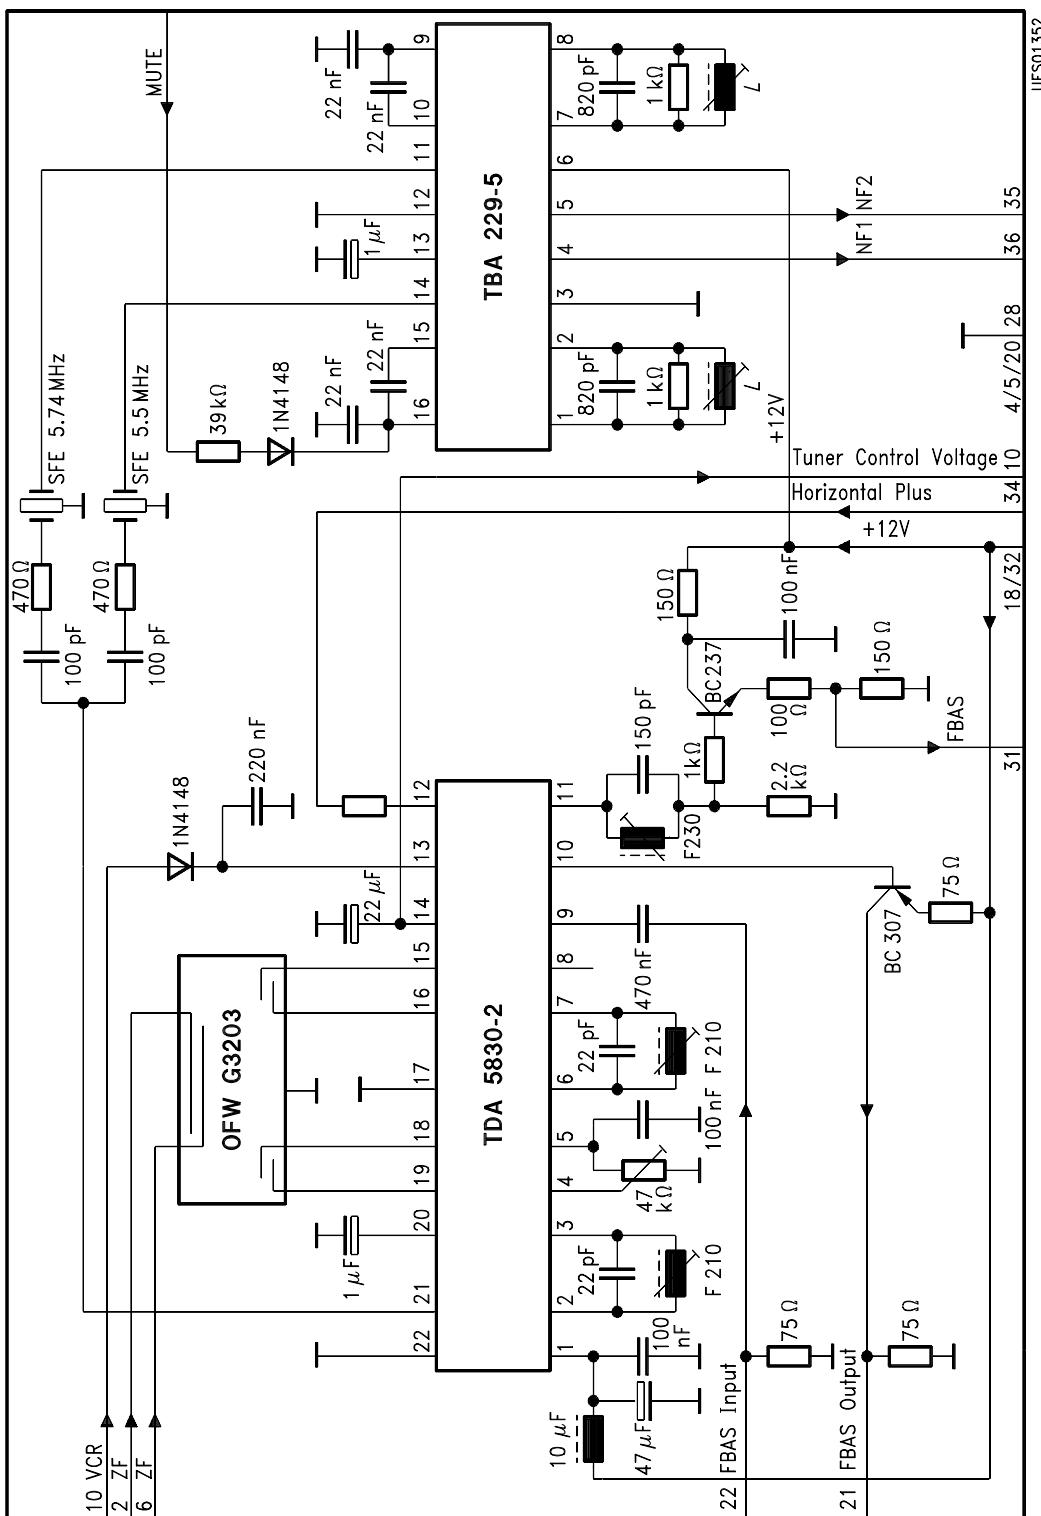
Tank Voltage versus f_{IF} 

Total Harmonic Distortion versus Detuning (FM Operation) $THD = f(f_{IF})$; $V_I = 10 \text{ mV}$; $V_S = 12 \text{ V}$; $f_{\text{mod}} = 1 \text{ kHz}$, $\Delta f = 50 \text{ kHz}, 30 \text{ kHz}, 12.5 \text{ kHz}$ 

Total Harmonic Distortion versus Detuning (FM Operation)compensated for minimum total harmonic distortion at $f_{IF} = 5.5$ MHz; $THD = f(f_{IF})$; $V_I = 10$ mV; $V_S = 12$ V; $f_{mod} = 1$ kHz, $\Delta f = 50$ kHz; 30 kHz; 12.5 kHz



Test Circuit



Application Circuit

$L = 10$ turns 0.2 CuL; Q_B approx. 25
e.g. Vogt Coil Assembly 517 12 000 00