

UMC3N / FMC3A

- 1) Both the DTA114E chip and DTC114E chip in a UMT or SMT package.
- 2) Ideal for power switch circuits.
- 3) Mounting cost and area can be cut in half.

Epitaxial planar type
NPN/PNP silicon transistor
(Built-in resistor type)

UMC3N

2.0 $\pm$ 0.2
1.3 $\pm$ 0.1
0.65 0.65
(2)
(3) (1)
(4) (5)
1.25 $\pm$ 0.1
2.1 $\pm$ 0.1
0.2 $\overset{+0.1}{-0.05}$
0.15 $\pm$ 0.05
0.1Min.

All terminals have same dimensions

FMC3A

2.9 $\pm$ 0.2
1.9 $\pm$ 0.2
0.95 0.95
(3) (4) (5)
(2) (1)
1.6 $\overset{+0.2}{-0.1}$
2.8 $\pm$ 0.2
1.1 $\overset{+0.2}{-0.1}$
0.8 $\pm$ 0.1
0.3 $\overset{+0.1}{-0.05}$
0.15 $\overset{+0.1}{-0.06}$
0.3~0.6

All terminals have same dimensions

ROHM : UMT5
EIAJ : SC-88A

ROHM : SMT5
EIAJ : SC-74A

Circuit diagram showing a differential pair with resistors $R_1 = 10k\Omega$ and $R_2 = 10k\Omega$, and diodes DTr_1 and DTr_2 .

Abbreviated symbol: C3

Parameter		Symbol	Limits	Unit
Supply voltage		V _{CC}	50	V
Input voltage		V _{IN}	40	V
			−10	
Output current		I _o	50	mA
		I _C (Max.)	100	
Power dissipation	UMC3N	P _d	150(TOTAL)	mW
	FMC3A		300(TOTAL)	
Junction temperature		T _j	150	℃
Storage temperature		T _{stg}	−55~+150	℃

*2 200mW per element must not be exceeded.

●Electrical characteristics (Ta = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Input voltage	$V_{I(off)}$	—	—	0.5	V	$V_{CC}=5V, I_o=100\mu A$
	$V_{I(on)}$	3	—	—		$V_o=0.3V, I_o=10mA$
Output voltage	$V_{O(on)}$	—	0.1	0.3	V	$I_o=10mA, I_i=0.5mA$
Input current	I_i	—	—	0.88	mA	$V_i=5V$
Output current	$I_o(off)$	—	—	0.5	μA	$V_{CC}=50V, V_i=0V$
DC current gain	G_i	30	—	—	—	$V_o=5V, I_o=5mA$
Transition frequency	f_T	—	250	—	MHz	$V_{CE}=10mA, I_E=-5mA, f=100MHz*$
Input resistance	R_i	7	10	13	k Ω	—
Resistance ratio	R_z/R_i	0.8	1	1.2	—	—

* Transition frequency of the device

●Packaging specifications

Part No.	Packaging type	Taping	
	Code	TR	T148
	Basic ordering unit (pieces)	3000	3000
UMC3N		○	—
FMC3A		—	○

●Electrical characteristic curves

DT_{r1} (NPN)

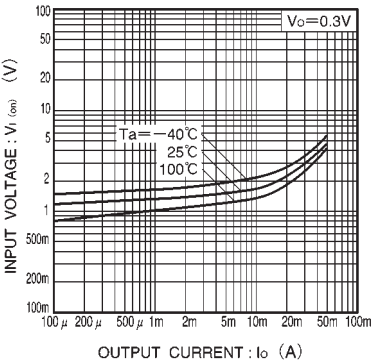


Fig.1 Input voltage vs. output current (ON characteristics)

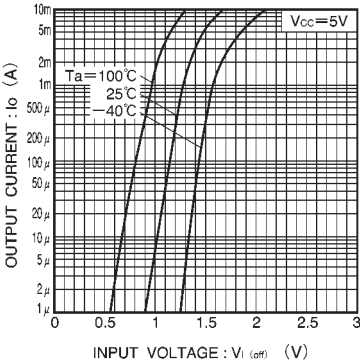


Fig.2 Output current vs. input voltage (OFF characteristics)

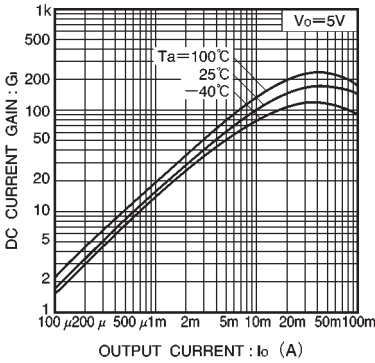


Fig.3 DC current gain vs. output current

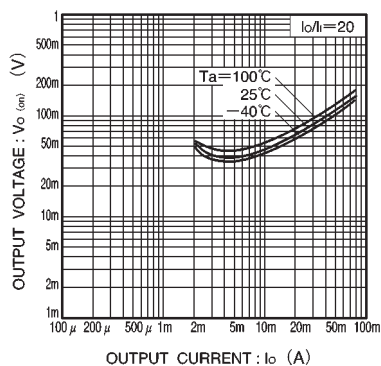


Fig.4 Output voltage vs. output current

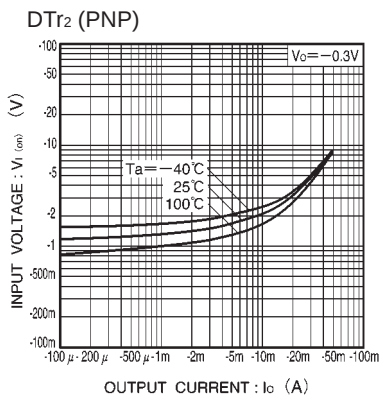


Fig.5 Input voltage vs. output current (ON characteristics)

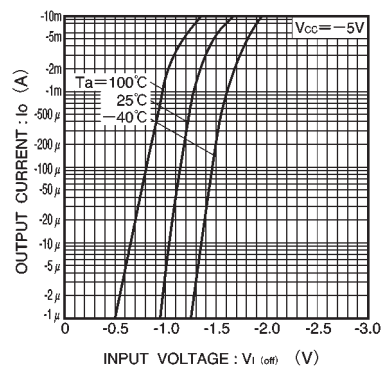


Fig.6 Output current vs. input voltage (OFF characteristics)

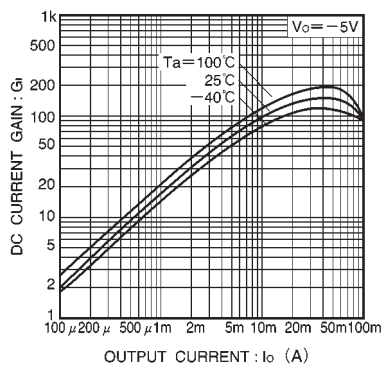


Fig.7 DC current gain vs. output current

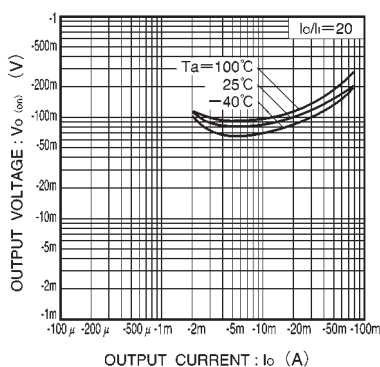


Fig.8 Output voltage vs. output current