


- All resistors are 1/2 watt, 10% unless otherwise noted.
- | | | | | |
|-----------------------------|-----------------------------|-------------------------|-------------------------|--------------------------------|
| R 1 1.2 megohms | R 18 1.2 megohms | R 35 470,000 ohms | C 9 330 pf mica 5% | D 1 Silicon rectifier, 500 ma, |
| R 2 150,000 ohms 1 watt 5% | R 19 47,000 ohms | R 36 470,000 ohms | C 10 3.3 nf 10% | 1000 PIV |
| R 3 5,600 ohms 5% | R 20 390 ohms | R 37 82,000 ohms 5% | C 11 10 nf 10% | D 2 Silicon rectifier, 500 ma, |
| R 4 120 ohms 1 watt 5% | R 21 18,000 ohms 5% | R 38 22,000 ohms | C 12 10 nf 10% | 1000 PIV |
| R 5 120 ohms 1 watt 5% | R 22 100,000 ohms 5% | R 39 2200 ohms 1 watt | C 13 3.3 nf 10% | volume control—250,000 ohms |
| R 6 1.2 megohms | R 23 47,000 ohms | R 40 2200 ohms 1 watt | C 14 3.3 nf 10% | balance control—750,000 ohms |
| R 7 47,000 ohms | R 24 1.5 megohms | R 41 50 ohms 5 watts | C 15 22 nf 10% | bass control—2 megohms |
| R 8 390 ohms | R 25 10,000 ohms | R 42 95 ohms 5 watts 5% | C 16 22 nf 10% | treble control—500,000 ohms |
| R 9 18,000 ohms 5% | R 26 10,000 ohms | C 1 1 mfd @ 16 v. | C 17 1 mfd @ 16 v. | hum control—1,000 ohms |
| R 10 100,000 ohms 5% | R 27 18,000 ohms | C 2 22 nf @ 400 v. | C 18 1 mfd @ 250 v. | V 1 12AX7/ECC-83 |
| R 11 47,000 ohms | R 28 18,000 ohms | C 3 1 mfd @ 400 v. | C 19 1 mfd @ 400 v. | V 2 12AX7/ECC-83 |
| R 12 1.5 megohms | R 29 4.7 megohms | C 4 330 pf mica 5% | C 20 1 mfd @ 400 v. | V 3 7199 |
| R 13 1.2 megohms | R 30 270,000 ohms 1 watt 5% | C 5 3.3 pf 10% | C 21 12 pf @ 600 v. 5% | V 4 7199 |
| R 14 150,000 ohms 1 watt 5% | R 31 560 ohms 5% | C 6 1 mfd @ 16 v. | C 22 .02 mfd @ 500 v. | V 5 6BQ5/EL-84 |
| R 15 5,600 ohms 5% | R 32 22,000 ohms 1 watt 5% | C 7 22 nf @ 400 v. | C 23 50/50 mfd @ 450 v. | V 6 6BQ5/EL-84 |
| R 16 120 ohms 1 watt 5% | R 33 120,000 ohms 5% | C 8 1 mfd @ 400 v. | C 24 60/40/20 @ 450 v. | V 7 6BQ5/EL-84 |
| R 17 120 ohms 1 watt 5% | R 34 27,000 ohms 1 watt 5% | | 100 @ 25 v. | V 8 6BQ5/EL-84 |



SCHEMATIC DIAGRAM

DYNACO SCA-35

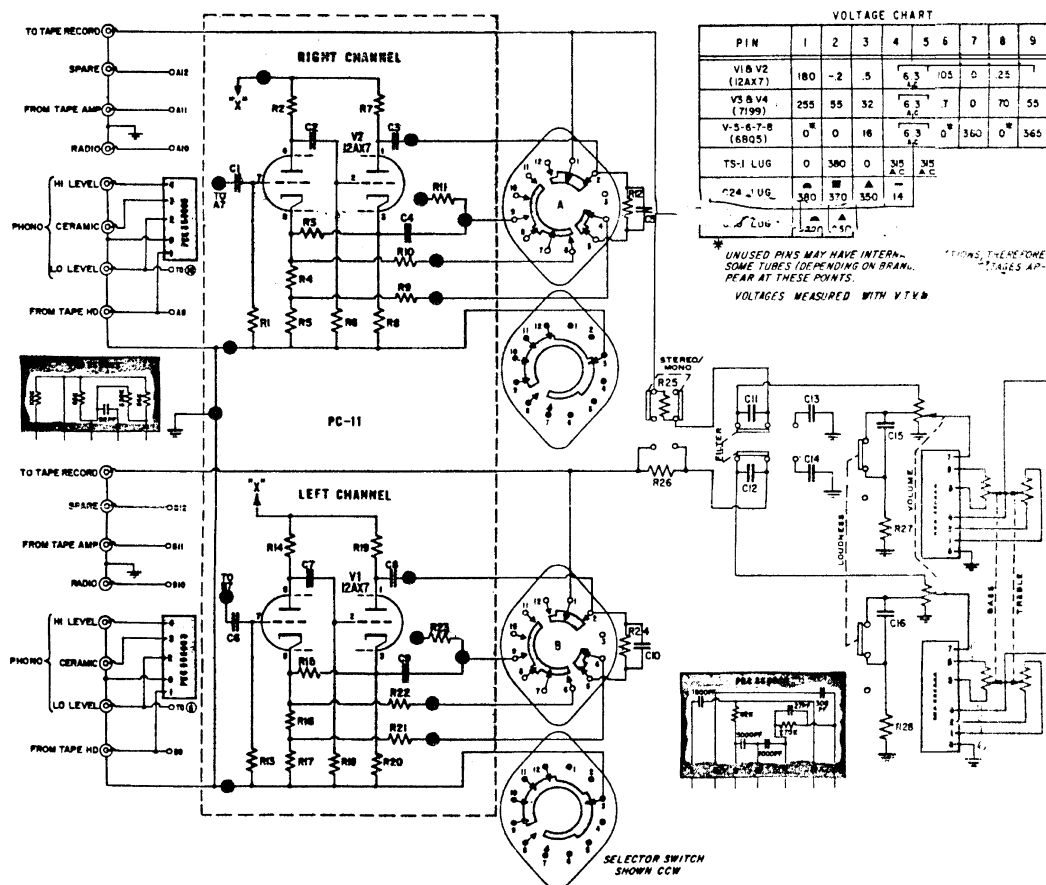