

YG801C06R

(60V / 5A TO-220F15)

SCHOTTKY BARRIER DIODE

Features

- Low V_F
- Super high speed switching.
- High reliability by planer design.

Applications

- High speed power switching.

Maximum Ratings and Characteristics

- Absolute Maximum Ratings

Item	Symbol	Conditions	Rating	Unit
Repetitive peak reverse voltage	V_{RRM}		60	V
Repetitive peak surge reverse voltage	V_{RSM}	$t_w=500ns$, duty=1/40	60	V
Isolating voltage	V_{ISO}	Terminals to Case, AC. 1min.	1500	V
Average output current	I_O	duty=1/2, $T_c=125^{\circ}C$ Square wave	5*	A
Suege current	I_{FSM}	Sine wave 10ms	60	A
Operating junction temperature	T_j		-40 to +150	$^{\circ}C$
Storage temperature	T_{stg}		-40 to +150	$^{\circ}C$

* Out put current of centertap full wave connection.

- Electrical Characteristics ($T_a=25^{\circ}C$ Unless otherwise specified)

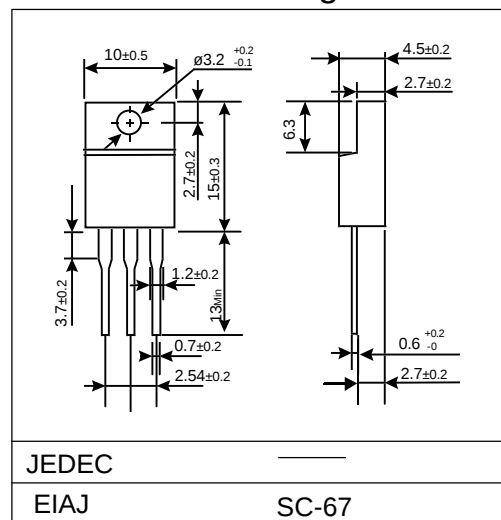
Item	Symbol	Conditions	Max.	Unit
Forward voltage drop **	V_F	$I_F=2.0A$	0.58	V
Reverse current **	I_R	$V_R=V_{RRM}$	5.0	mA
Thermal resistance	$R_{th(j-c)}$	Junction to case	5.0	$^{\circ}C/W$

** Rating per element


- Mechanical Characteristics






Mounting torque	Recommended torque	0.3 to 0.5	N · m
Weight		2.3	g

Outline Drawings



Connection Diagram

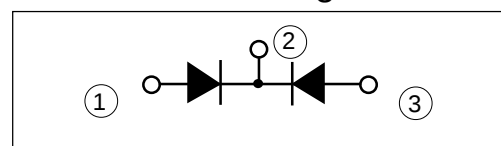

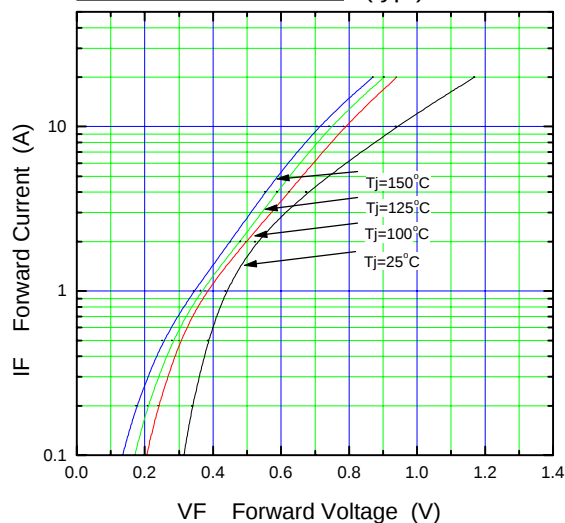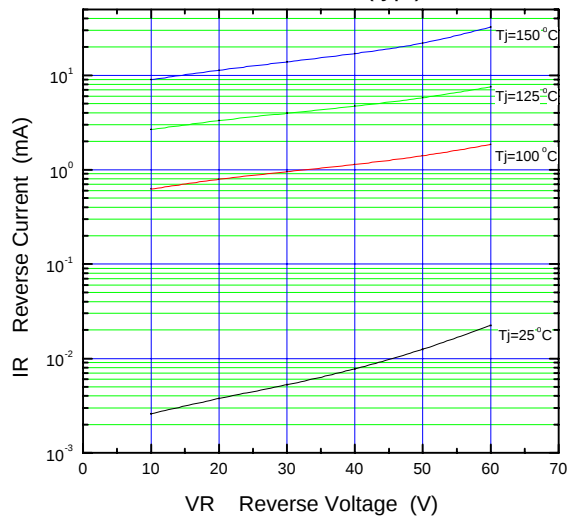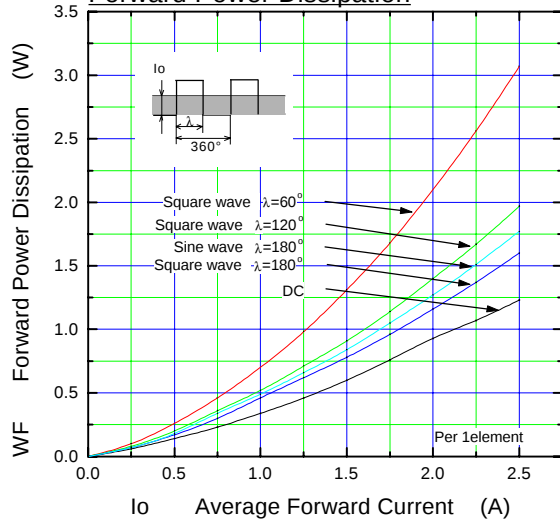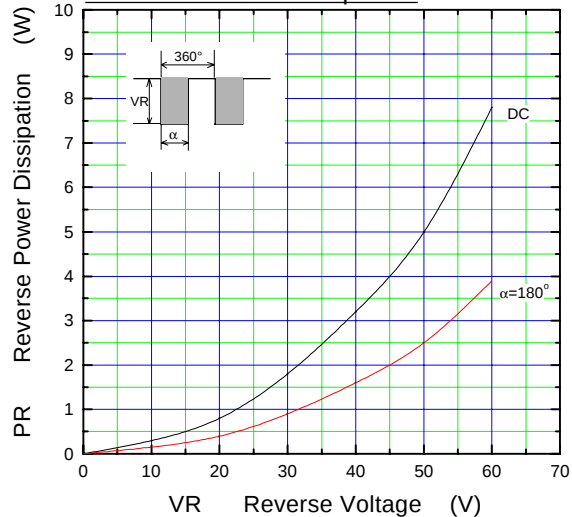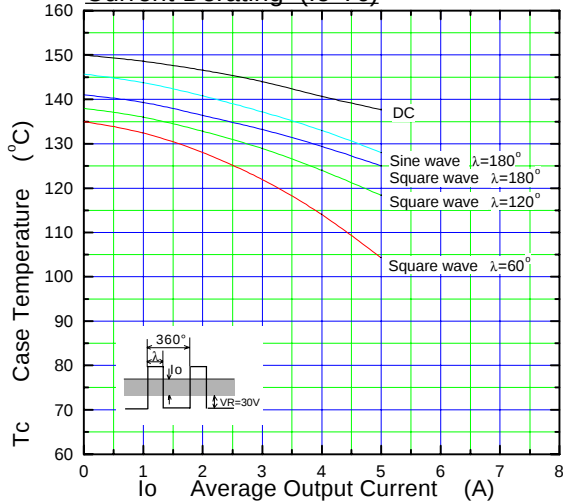■ Characteristics**Forward Characteristic (typ.)****Reverse Characteristic (typ.)****Forward Power Dissipation****Reverse Power Dissipation****Current Derating (I_o - T_c)**

λ : Conduction angle of forward current for each rectifier element
 I_o : Output current of center-tap full wave connection

Junction Capacitance Characteristic (typ.)