

4.0 Amps Single Phase Full Wave

Bridge Rectifier

Features

- Diode chips are glass passivated
- Suitable for Universal hole mounting
- Easy to assemble & install on P.C.B.
- High Surge Current Capability
- High Isolation between terminals and molded case
- Leads are suitable for high temperature
- Soldering at 260°C for 8-10 seconds
- UL evaluation is under process

$$I_{O(AV)} = 4A$$

$$V_{RRM} = 50/ 1200V$$

Description

These GBU Series of Single Phase Bridges consist of four glass passivated silicon junction connected as a Full Wave Bridge. These four junctions are encapsulated by plastic molding technique. These Bridges are mainly used in Switch Mode power supply and in industrial and consumer equipment.

Major Ratings and Characteristics

Parameters	4GBU	Units
I_o	4	A
@ T_c	100	°C
I_{FSM}	150	A
@50Hz	158	A
@60Hz	113	A ² s
I^2t	104	A ² s
V_{RRM} range	50 to 1200	V
T_J	- 55 to 150	°C



4GBU

4GBU Series

Preliminary Data Sheet rev. B I2717 12/00

International
IR Rectifier

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V_{RRM} , max repetitive peak rev. voltage $T_J = T_J \text{ max.}$ V	V_{RSM} , max non-repetitive peak rev. voltage $T_J = T_J \text{ max.}$ V	I_{RRM} max. @ rated V_{RRM} $T_J = 25^\circ\text{C}$ μA	I_{RRM} max. @ rated V_{RRM} $T_J = 150^\circ\text{C}$ μA
4GBU	005	50	80	5	400
	01	100	150	5	400
	02	200	300	5	400
	04	400	500	5	400
	06	600	700	5	400
	08	800	900	5	400
	10	1000	1100	5	400
	12	1200	1300	5	400

Forward Conduction


Parameters	4GBU	Unit	Conditions
I_O Maximum DC output current	4	A	$T_C = 100^\circ\text{C}$, Resistive & inductive load $T_C = 100^\circ\text{C}$, Capacitive load
	3.2		
I_{FSM} Maximum peak, one-cycle non-repetitive surge current, following any rated load condition and with rated V_{RRM} reapplied	150		$T_J = 150^\circ\text{C}$
	158		
I^2t Maximum I^2t for fusing, initial $T_J = T_J \text{ max}$	113	A^2s	$t = 10\text{ms}$ $t = 8.3\text{ms}$
	104		
V_{FM} Maximum peak forward voltage per diode	1.0	V	$T_J = 25^\circ\text{C}$, $I_{FM} = 4\text{A}$
I_{RM} Typical peak reverse leakage current per diode	5	μA	$T_J = 25^\circ\text{C}$, 100% V_{RRM}
V_{RRM} Maximum repetitive peak reverse voltage range	50 to 1200	V	

Thermal and Mechanical Specifications


Parameters	4GBU	Unit	Conditions
T_J Operating and storage temperature range	-55 to 150	$^\circ\text{C}$	
R_{thJC} Max. thermal resistance junction to case	4.2	$^\circ\text{C}/\text{W}$	DC rated current through bridge (1)
R_{thJA} Thermal resistance, junction to ambient	22	$^\circ\text{C}/\text{W}$	DC rated current through bridge (1)
W Approximate weight	4(0.14)	g(oz)	
T Mounting Torque	1.0	Nm	Bridge to Heatsink
	9.0	Lb.in	

Note (1): Devices mounted on 40x40x1.5mm aluminum plate; use silicon thermal compound for maximum heat transfer and bolt down using 3mm screw

Ordering Information Table

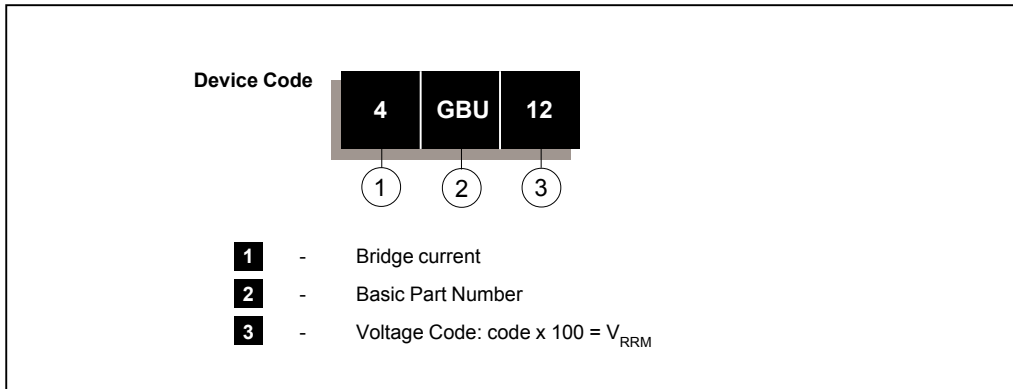

Outline Table

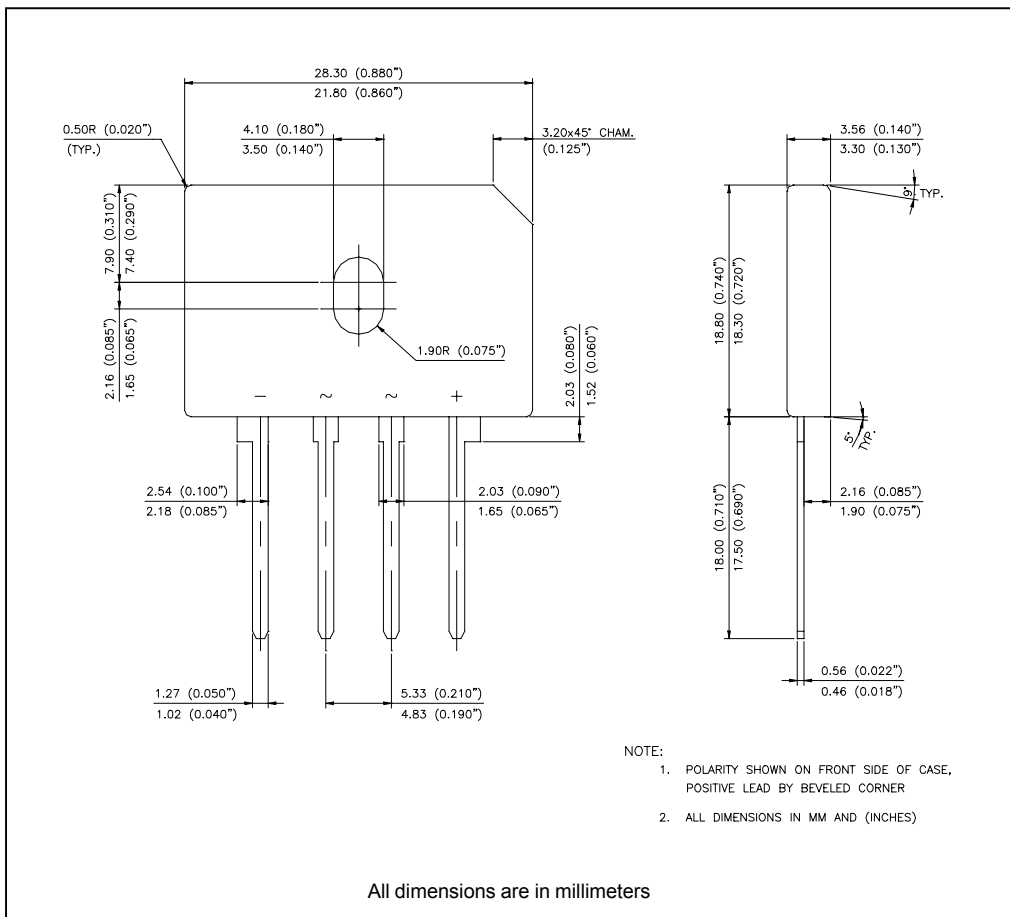

4GBU Series

Preliminary Data Sheet rev. B I2717 12/00

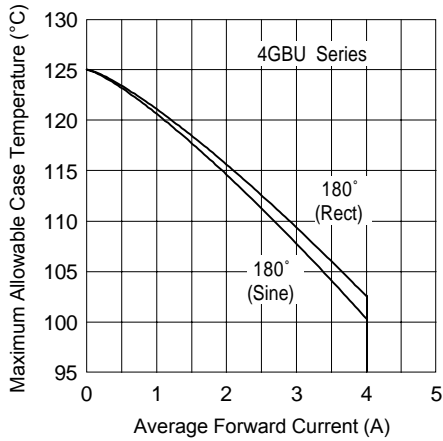


Fig. 1 - Current Ratings Characteristics

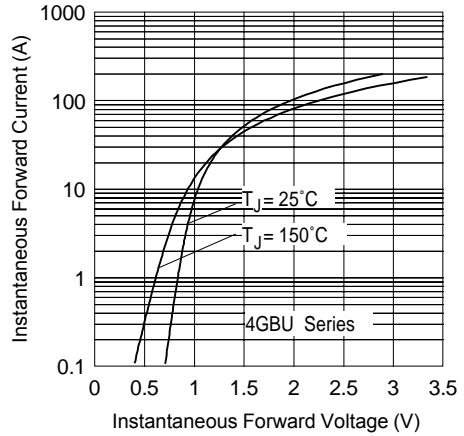


Fig. 2 - Forward Voltage Drop Characteristics

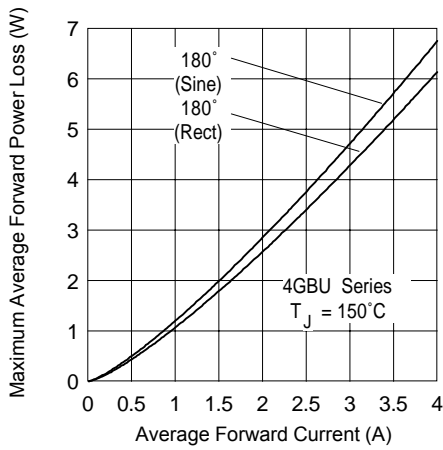


Fig. 3 - Total Power Loss Characteristics

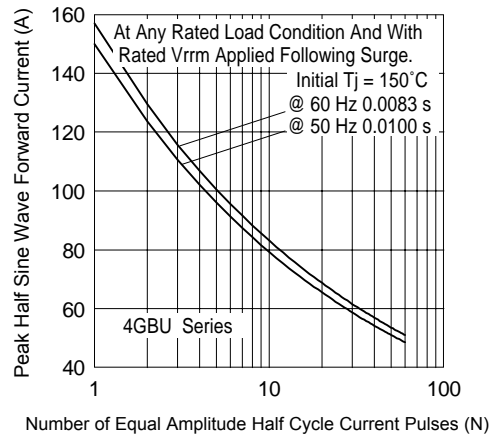


Fig. 4 - Maximum Non-Repetitive Surge Current

WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245 U.S.A. Tel: (310) 322 3331. Fax: (310) 322 3332.
EUROPEAN HEADQUARTERS: Hurst Green, Oxted, Surrey RH8 9BB, U.K. Tel: ++ 44 1883 732020. Fax: ++ 44 1883 733408.
IR CANADA: 15 Lincoln Court, Brampton, Markham, Ontario L6T3Z2. Tel: (905) 453 2200. Fax: (905) 475 8801.
IR GERMANY: Saalburgstrasse 157, 61350 Bad Homburg. Tel: ++ 49 6172 96590. Fax: ++ 49 6172 965933.
IR ITALY: Via Liguria 49, 10071 Borgaro, Torino. Tel: ++ 39 11 4510111. Fax: ++ 39 11 4510220.
IR FAR EAST: K&H Bldg., 2F, 30-4 Nishi-Ikebukuro 3-Chome, Toshima-Ku, Tokyo, Japan 171. Tel: 81 3 3983 0086.
IR SOUTHEAST ASIA: 1 Kim Seng Promenade, Great World City West Tower, 13-11, Singapore 237994. Tel: ++ 65 838 4630.
IR TAIWAN: 16 Fl. Suite D.207, Sec. 2, Tun Haw South Road, Taipei, 10673, Taiwan. Tel: 886 2 2377 9936.

<http://www.irf.com> Fax-On-Demand: +44 1883 733420

Data and specifications subject to change without notice.