

International
IR Rectifier

100BGQ100
100BGQ100J

SCHOTTKY RECTIFIER

100 Amp

Major Ratings and Characteristics

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform	100	A
@ T_C	129	°C
I_{DC} Maximum	141	A
V_{RRM}	100	V
I_{FSM} @ $t_p = 5 \mu s$ sine	6300	A
V_F @ 100A pk typical	0.74	V
@ T_J	125	°C
T_J range	-55 to 175	°C

Description/Features

This NEW Schottky rectifier has been optimized for low reverse leakage at high temperature

The proprietary barrier technology allows for reliable operation up to 175°C junction temperature. Typical applications are in switching power supplies, converters, reverse battery protection, and redundant power subsystems.

- 175°C T_J operation
- High Frequency Operation
- Low forward voltage drop
- Continuous High Current operation
- Guard ring for enhanced ruggedness and long term reliability
- **PowIRtab™ package**

Case Styles

100BGQ100



100BGQ100J



100BGQ100, 100BGQ100J

Preliminary Data Sheet PD-20999 rev. A 10/99

International
IR Rectifier

Voltage Ratings

Part number	100BGQ100, 100BGQ100J
V_R Max. DC Reverse Voltage (V)	100
V_{RWM} Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters	Values	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current	100	A	50% duty cycle @ $T_C = 129^\circ\text{C}$, rectangular waveform
$I_{F(RMS)}$ RMS Forward Current	141	A	$T_C = 120^\circ\text{C}$
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current	6300	A	5 μs Sine or 3 μs Rect. pulse
	800		10ms Sine or 6ms Rect. pulse
E_{AS} Non-Repetitive Avalanche Energy	9	mJ	Following any rated load condition and with rated V_{RWM} applied
I_{AR} Repetitive Avalanche Current	2	A	$T_J = 25^\circ\text{C}$, $I_{AS} = 2$ Amps, $L = 4.5$ mH Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical

Electrical Specifications

Parameters	Values		Units	Conditions	
	Typ.	Max.			
V_{FM} Forward Voltage Drop (1) (2)	0.80	0.84	V	@ 50A	$T_J = 25^\circ\text{C}$
	0.96	1.04	V	@ 100A	
	0.64	0.66	V	@ 50A	$T_J = 125^\circ\text{C}$
	0.74	0.77	V	@ 100A	
I_{RM} Reverse Leakage Current (1)	22	300	μA	$T_J = 25^\circ\text{C}$	$V_R = \text{rated } V_R$
	14	18	mA	$T_J = 125^\circ\text{C}$	
$V_{F(To)}$ Threshold Voltage	0.484		V	$T_J = T_J \text{ max.}$	
r_t Forward Slope Resistance	2.0		m Ω		
C_T Max. Junction Capacitance	1320		pF	$V_R = 5V_{DC}$, (test signal range 100Khz to 1Mhz) 25°C	
L_S Typical Series Inductance	3.5		nH	Measured from tab to mounting plane	
dv/dt Max. Voltage Rate of Change (Rated V_R)	10,000		V/ μs		

(1) Pulse Width < 300 μs , Duty Cycle < 2%

(2) $V_{FM} = V_{F(To)} + r_t \times I_F$

Thermal-Mechanical Specifications

Parameters			Values	Units	Conditions
T _J	Max. Junction Temperature Range		-55 to 175	°C	
T _{stg}	Max. Storage Temperature Range		-55 to 175	°C	
R _{thJC}	Max. Thermal Resistance Junction to Case		0.50	°C/W	DC operation
R _{thCS}	Typical Thermal Resistance, Case to Heatsink		0.20	°C/W	Mounting surface, smooth and greased
wt	Approximate Weight		5 (0.18)	g (oz.)	
T	Mounting Torque	Min.	1.2 (10)	N•m (lbf-in)	
		Max.	2.4 (20)		
Case Style			PowIRtab™		

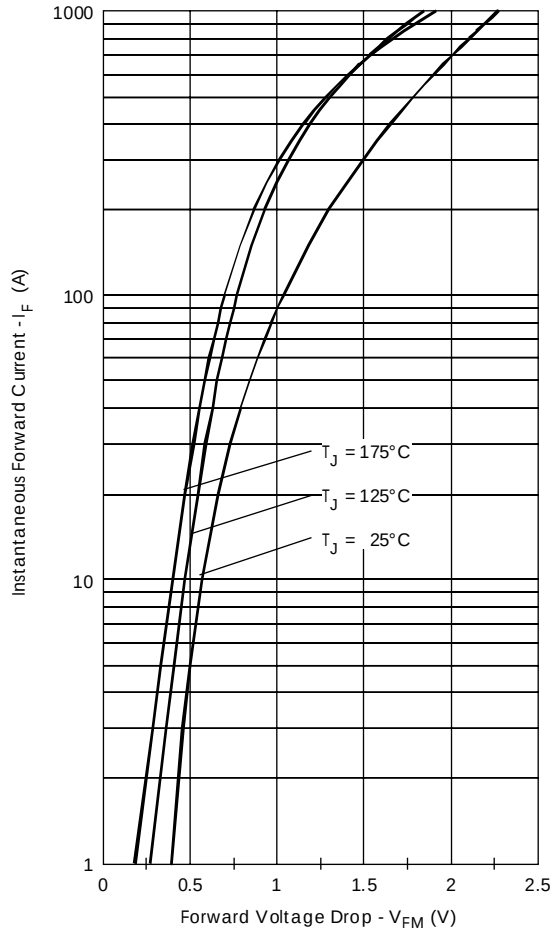


Fig. 1 - Maximum Forward Voltage Drop Characteristics

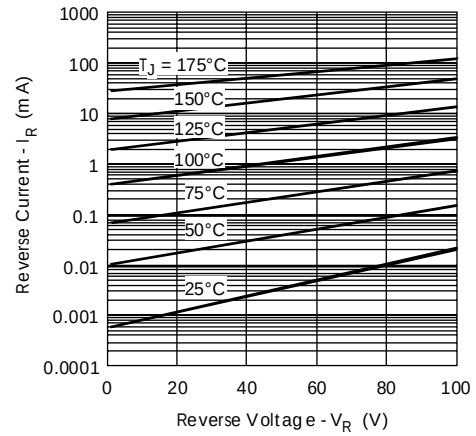


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

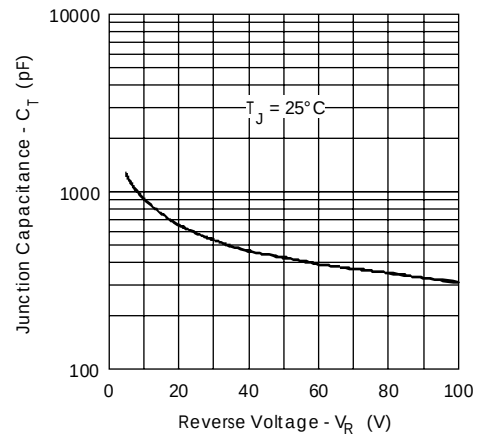


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

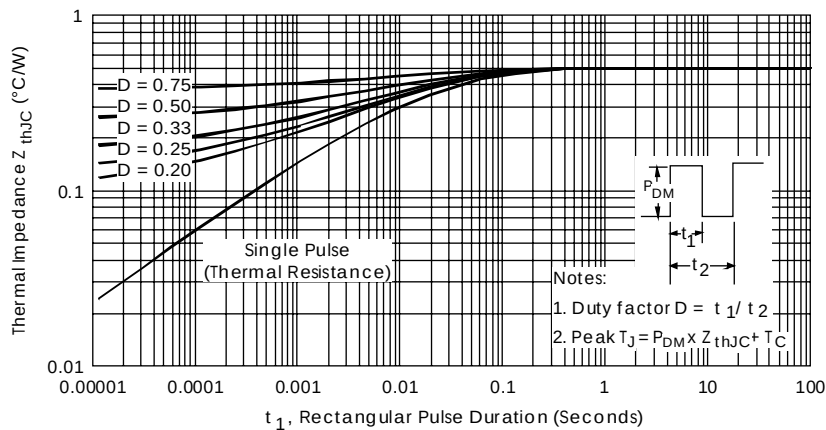


Fig. 4 - Maximum Thermal Impedance Z_{thJC} Characteristics

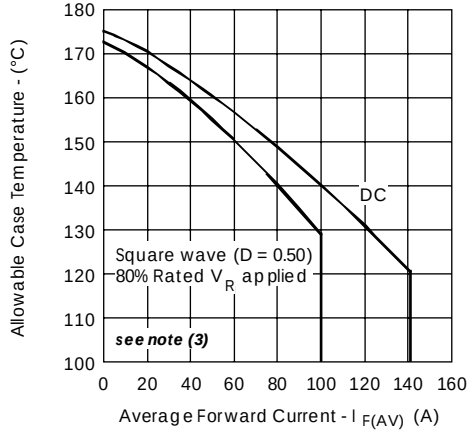


Fig. 5 - Maximum Allowable Case Temperature Vs. Average Forward Current

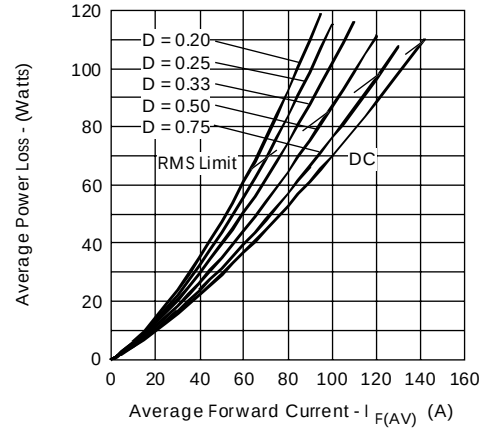


Fig. 6 - Forward Power Loss Characteristics

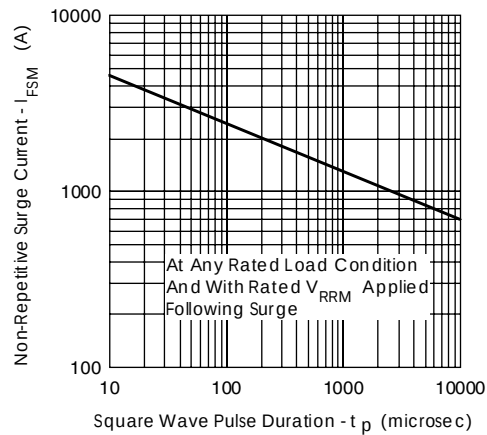


Fig. 7 - Maximum Non-Repetitive Surge Current

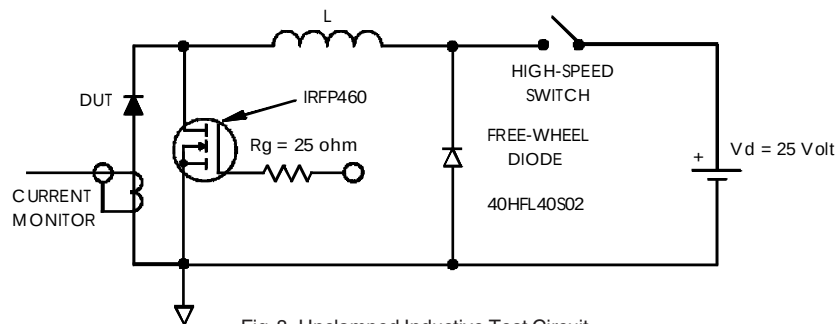


Fig. 8 - Unclamped Inductive Test Circuit

(3) Formula used: $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$;


P_d = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);

$P_{d_{REV}}$ = Inverse Power Loss = $V_{R1} \times I_{R1} (1 - D)$; $I_{R1} @ V_{R1} = 80\% \text{ rated } V_R$

Ordering Information Table

Device Code			
100	BGQ	100	J
①	②	③	④
1	-	Current Rating	
2	-	Essential Part Number	
3	-	Voltage code: Code = V_{RRM}	
4	-	none = PowIRtab™ standard	
	J	= Short Lead Version	

Outline Table

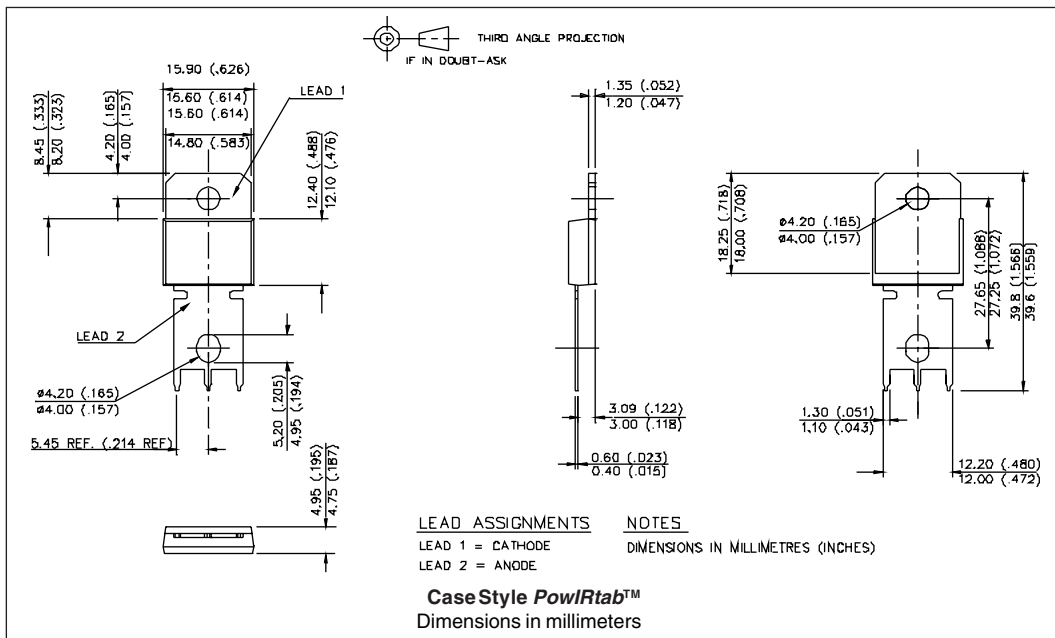


100BGQ100, 100BGQ100J

Preliminary Data Sheet PD-20999 rev. A 10/99

International
IR Rectifier

Outline Table

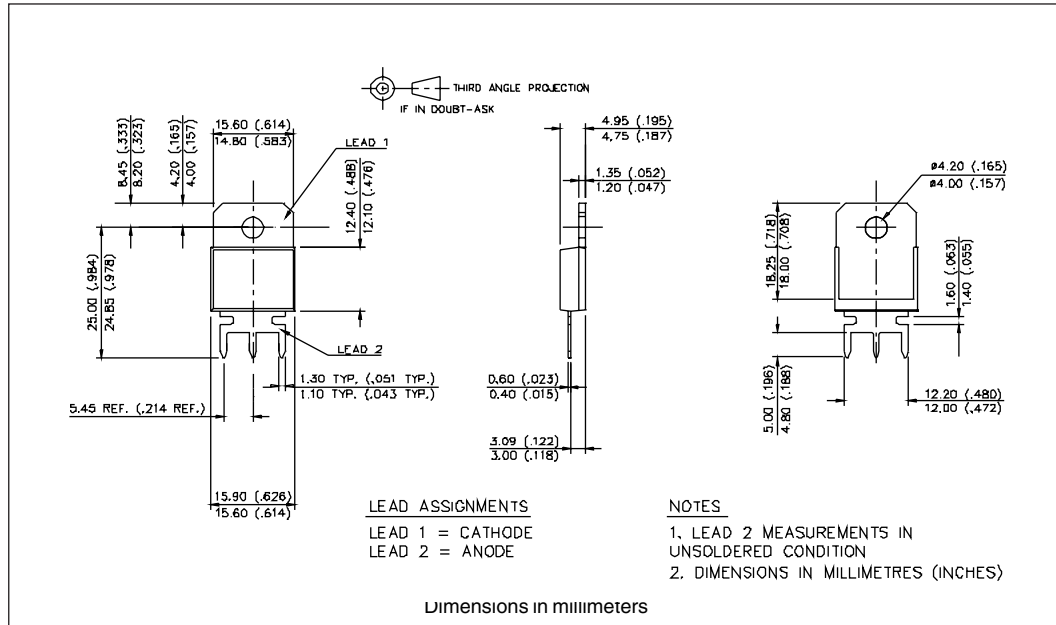

International
IR Rectifier

WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245 U.S.A. Tel: (310) 322 3331. Fax: (310) 322 3332.
EUROPEAN HEADQUARTERS: Hurst Green, Oxted, Surrey RH8 9BB, U.K. Tel: ++ 44 1883 732020. Fax: ++ 44 1883 733408.
IR CANADA: 15 Lincoln Court, Brampton, Markham, Ontario L6T3Z2. Tel: (905) 453 2200. Fax: (905) 475 8801.
IR GERMANY: Saalburgstrasse 157, 61350 Bad Homburg. Tel: ++ 49 6172 96590. Fax: ++ 49 6172 965933.
IR ITALY: Via Liguria 49, 10071 Borgaro, Torino. Tel: ++ 39 11 4510111. Fax: ++ 39 11 4510220.
IR FAR EAST: K&H Bldg., 2F, 30-4 Nishi-Ikebukuro 3-Chome, Toshima-Ku, Tokyo, Japan 171. Tel: 81 3 3983 0086.
IR SOUTHEAST ASIA: 1 Kim Seng Promenade, Great World City West Tower, 13-11, Singapore 237994. Tel: ++ 65 838 4630.
IR TAIWAN: 16 Fl. Suite D.207, Sec. 2, Tun Haw South Road, Taipei, 10673, Taiwan. Tel: 886 2 2377 9936.

<http://www.irf.com>

Fax-On-Demand: +44 1883 733420

Data and specifications subject to change without notice.