

International  
**IOR** Rectifier

175BGQ045  
 175BGQ045J

SCHOTTKY RECTIFIER

175 Amp

#### Major Ratings and Characteristics

| Characteristics                             | 175BGQ045   | Units   |
|---------------------------------------------|-------------|---------|
| $I_{F(AV)}$ Rectangular waveform<br>@ $T_C$ | 175<br>107  | A<br>°C |
| $I_{DC}$ Maximum                            | 248         | A       |
| $V_{RRM}$                                   | 45          | V       |
| $I_{FSM}$ @ $t_p = 5 \mu s$ sine            | 8700        | A       |
| $V_F$ @ 175A pk typical<br>@ $T_J$          | 0.61<br>150 | V<br>°C |
| $T_J$ range                                 | -55 to 150  | °C      |

#### Description/Features

The NEW 175BGQ045 Schottky rectifier has been optimized for ultra low forward voltage drop specifically for low voltage output in high current AC/DC power supplies.

The proprietary barrier technology allows for reliable operation up to 150°C junction temperature. Typical applications are in switching power supplies, converters, reverse battery protection, and redundant power subsystems.

- 150°C  $T_J$  operation
- High Frequency Operation
- Ultra low forward voltage drop
- Continuous High Current operation
- Guard ring for enhanced ruggedness and long term reliability
- **PowIRtab™ package**

#### Case Styles

175BGQ045



175BGQ045J



# 175BGQ045, 175BGQ045J

PD-20710 rev. C 11/99

International  
IR Rectifier

## Voltage Ratings

|                                                 |           |
|-------------------------------------------------|-----------|
| Part number                                     | 175BGQ045 |
| $V_R$ Max. DC Reverse Voltage (V)               | 45        |
| $V_{RWM}$ Max. Working Peak Reverse Voltage (V) |           |

## Absolute Maximum Ratings

| Parameters                                                 | 175BGQ | Units | Conditions                                                                                                               |
|------------------------------------------------------------|--------|-------|--------------------------------------------------------------------------------------------------------------------------|
| $I_{F(AV)}$ Max. Average Forward Current                   | 175    | A     | 50% duty cycle @ $T_C = 107^\circ\text{C}$ , rectangular wave form                                                       |
| $I_{F(RMS)}$ RMS Forward Current                           | 248    | A     | $T_C = 104^\circ\text{C}$                                                                                                |
| $I_{FSM}$ Max. Peak One Cycle Non-Repetitive Surge Current | 8700   | A     | 5 $\mu\text{s}$ Sine or 3 $\mu\text{s}$ Rect. pulse                                                                      |
|                                                            | 1550   |       | 10ms Sine or 6ms Rect. pulse                                                                                             |
| $E_{AS}$ Non-Repetitive Avalanche Energy                   | 40     | mJ    | $T_J = 25^\circ\text{C}$ , $I_{AS} = 6\text{ Amps}$ , $L = 2.0\text{ mH}$                                                |
| $I_{AR}$ Repetitive Avalanche Current                      | 6      | A     | Current decaying linearly to zero in 1 $\mu\text{sec}$<br>Frequency limited by $T_J$ max. $V_A = 1.5 \times V_R$ typical |

## Electrical Specifications

| Parameters                                         | 175BGQ |      | Units            | Conditions                                                              |                           |
|----------------------------------------------------|--------|------|------------------|-------------------------------------------------------------------------|---------------------------|
|                                                    | Typ.   | Max. |                  |                                                                         |                           |
| $V_{FM}$ Forward Voltage Drop (1) (2)              | 0.53   | 0.56 | V                | @ 100A                                                                  | $T_J = 25^\circ\text{C}$  |
|                                                    | 0.64   | 0.69 | V                | @ 175A                                                                  |                           |
|                                                    | 0.48   | 0.52 | V                | @ 100A                                                                  | $T_J = 150^\circ\text{C}$ |
|                                                    | 0.61   | 0.64 | V                | @ 175A                                                                  |                           |
| $I_{RM}$ Reverse Leakage Current (1)               | 0.6    | 2    | mA               | $T_J = 25^\circ\text{C}$                                                | $V_R = \text{rated } V_R$ |
|                                                    | 360    | 640  | mA               | $T_J = 125^\circ\text{C}$                                               |                           |
|                                                    | 1200   | 2000 | mA               | $T_J = 150^\circ\text{C}$                                               | $V_R = 45\text{V}$        |
| $V_{F(TO)}$ Threshold Voltage                      | 0.352  |      | V                | $T_J = T_J \text{ max.}$                                                |                           |
| $r_t$ Forward Slope Resistance                     | 1.5    |      | m $\Omega$       |                                                                         |                           |
| $C_T$ Max. Junction Capacitance                    | 5600   |      | pF               | $V_R = 5V_{DC}$ , (test signal range 100Khz to 1Mhz) $25^\circ\text{C}$ |                           |
| $L_S$ Typical Series Inductance                    | 3.5    |      | nH               | Measured from tab to mounting plane                                     |                           |
| $dv/dt$ Max. Voltage Rate of Change (Rated $V_R$ ) | 10,000 |      | V/ $\mu\text{s}$ |                                                                         |                           |

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

(2)  $V_{FM} = V_{F(TO)} + r_t \times I_F$

## Thermal-Mechanical Specifications

| Parameters                                              | 175BGQ     | Units              | Conditions                           |
|---------------------------------------------------------|------------|--------------------|--------------------------------------|
| $T_J$ Max. Junction Temperature Range                   | -55 to 150 | $^\circ\text{C}$   |                                      |
| $T_{stg}$ Max. Storage Temperature Range                | -55 to 150 | $^\circ\text{C}$   |                                      |
| $R_{thJC}$ Max. Thermal Resistance Junction to Case     | 0.25       | $^\circ\text{C/W}$ | DC operation                         |
| $R_{thCS}$ Typical Thermal Resistance, Case to Heatsink | 0.20       | $^\circ\text{C/W}$ | Mounting surface, smooth and greased |
| wt Approximate Weight                                   | 5(0.18)    | g(oz.)             |                                      |
| T Mounting Torque                                       | Min.       | 1.2(10)            | N*m<br>(lbf-in)                      |
|                                                         | Max.       | 2.4(20)            |                                      |
| Case Style                                              | PowIRtab™  |                    |                                      |

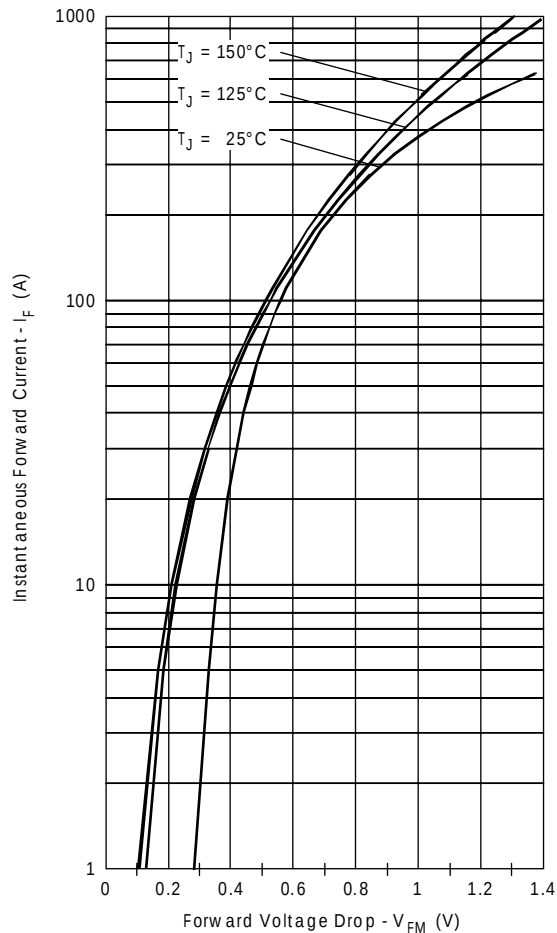


Fig. 1 - Maximum Forward Voltage Drop Characteristics

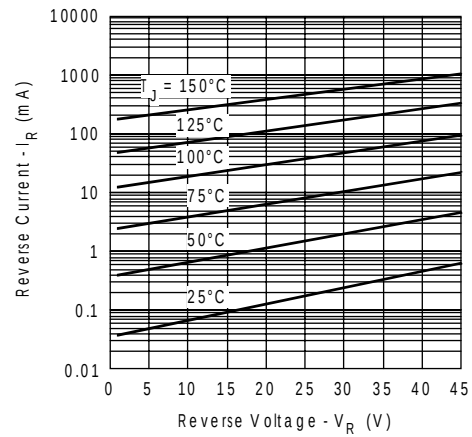


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

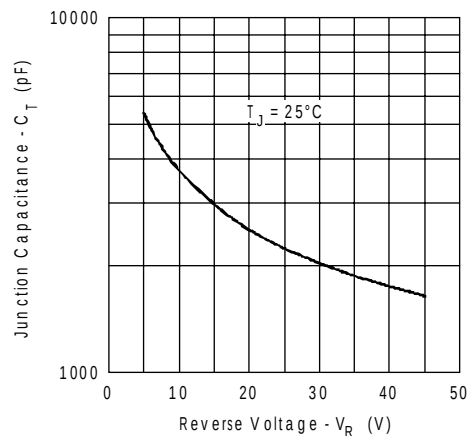


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

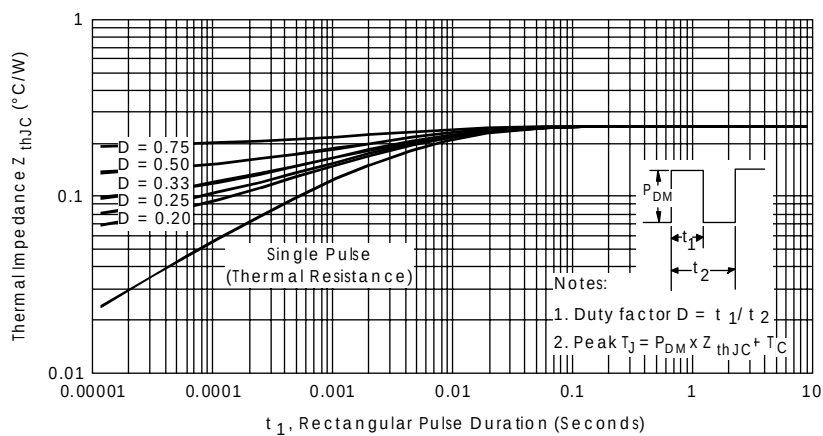


Fig. 4 - Maximum Thermal Impedance  $Z_{thJC}$  Characteristics

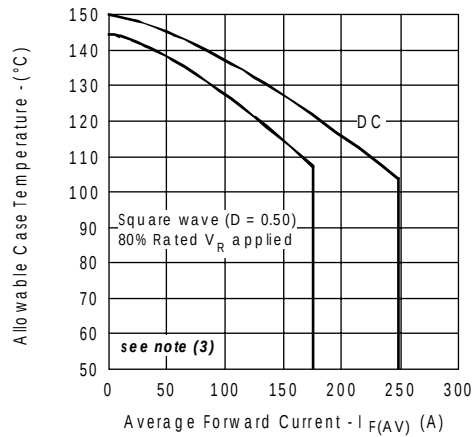


Fig. 5 - Maximum Allowable Case Temperature Vs. Average Forward Current

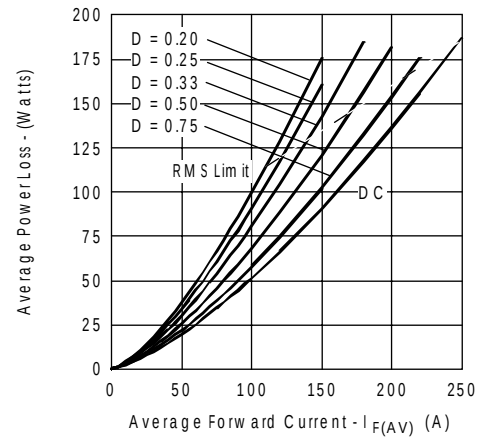


Fig. 6 - Forward Power Loss Characteristics

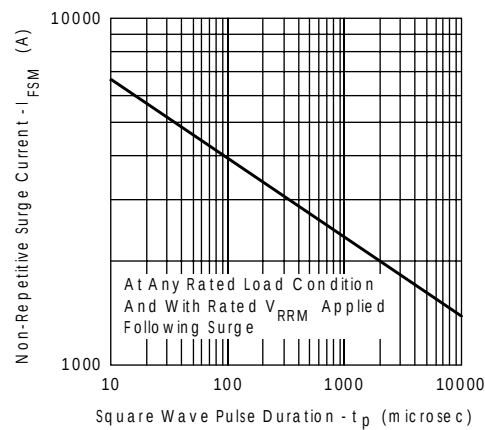


Fig. 7 - Maximum Non-Repetitive Surge Current

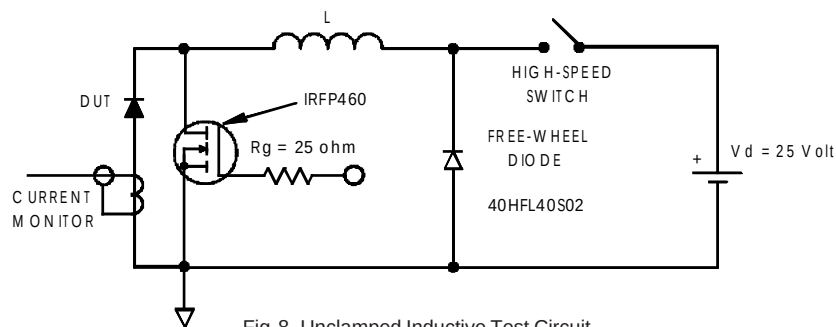


Fig. 8 - Unclamped Inductive Test Circuit

(3) Formula used:  $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$ ;


$P_d$  = Forward Power Loss =  $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$  (see Fig. 6);

$P_{d_{REV}}$  = Inverse Power Loss =  $V_{R1} \times I_R (1 - D)$ ;  $I_R @ V_{R1} = 80\% \text{ rated } V_R$


Ordering Information Table

| Device Code |                                  |     |   |
|-------------|----------------------------------|-----|---|
| 175         | BGQ                              | 045 | J |
| ①           | ②                                | ③   | ④ |
| 1           | - Current Rating                 |     |   |
| 2           | - Essential Part Number          |     |   |
| 3           | - Voltage code: Code = $V_{RRM}$ |     |   |
| 4           | - none = PowIRtab™ standard      |     |   |
|             | J = Short Lead Version           |     |   |

Outline Table

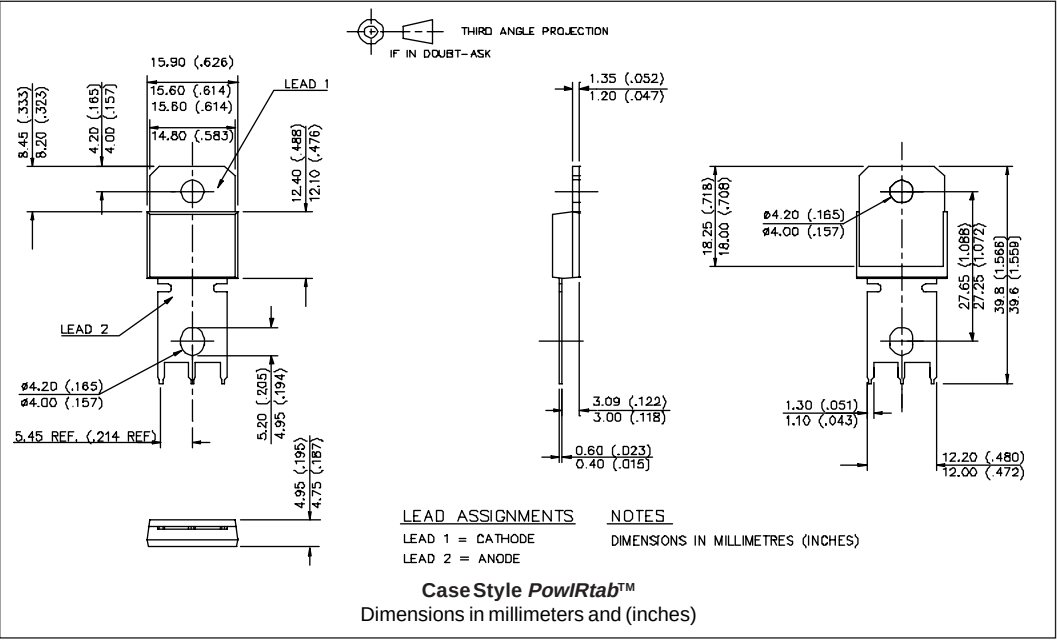

Outline Table

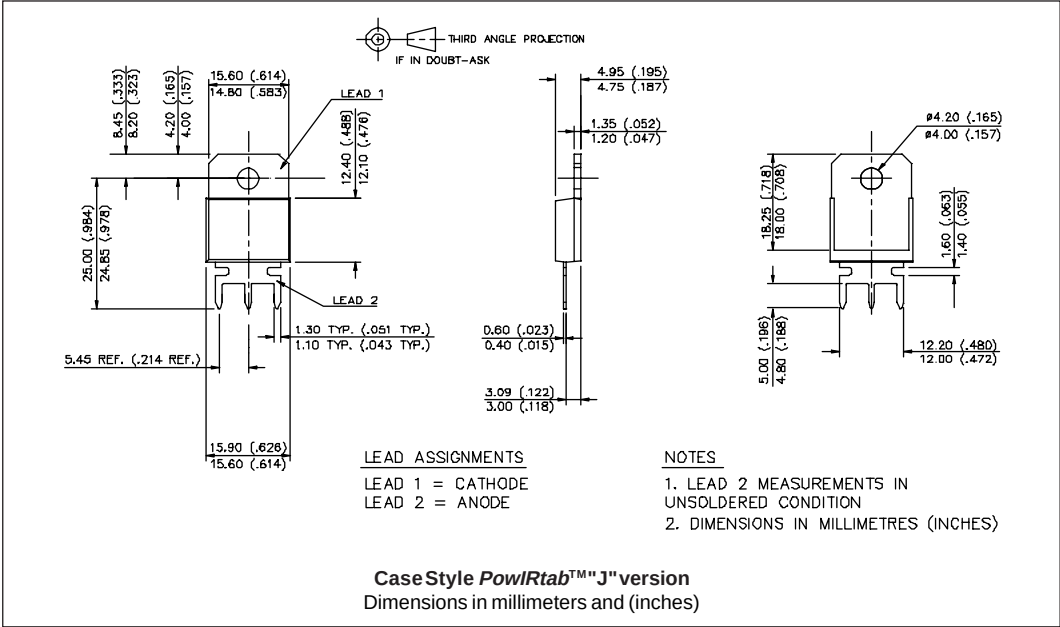

\*\*\*\*\*

This model has been developed by  
Wizard SPICE MODEL GENERATOR(1999)  
(International Rectifier Corporation)  
contains Proprietary Information

\*\*\*\*\*

SPICE Model Diode is composed by a  
simple diode plus paralld VCG2T

\*\*\*\*\*

.SUBCKT 175bgq45 ANO CAT

D1 ANO 1 DMOD (0.24359)

\*Define diode model

.MODEL DMOD D(IS=1.83192228095708E-04A,N=1.05013272757567,BV=45V,  
+IBV=0.318718355472911A,RS=0.0003020516,CJO=5.36650017916966E-08,  
+VJ=0.773797902206145,XTI=2,EG=0.707245556720411)

\*\*\*\*\*

\*Implementation of VCG2T

VX 1 2 DC 0V

R1 2 CAT TRES 1E-6

.MODEL TRES RES(R=1, TC1=5.6216088199529)

GP1 ANO CAT VALUE={-ABS(I(VX))\*(EXP(((((-2.339145E-03/

5.621609)\*((V(2,CAT)\*1E6)/(I(VX)+1E-6)-1))+1)\*5.687601E-02\*ABS(V(ANO,CAT)))-1}}

\*\*\*\*\*

.ENDS175bgq45

Thermal Model Subcircuit

.SUBCKT 175bgq45T 5 1

CTHERM1 5 4 1.71E+3

CTHERM2 4 3 3.63E+2

CTHERM3 3 2 3.23E+4

CTHERM4 2 1 3.12E+5

RTHERM1 5 4 3.24E-2

RTHERM2 4 3 1.52E-1

RTHERM3 3 2 4.08E-2

RTHERM4 2 1 1.81E-4

.ENDS 175bgq45T