


SCHOTTKY RECTIFIER

2 Amp



Major Ratings and Characteristics



Characteristics	21DQ06	Units
$I_{F(AV)}$ Rectangular waveform	2	A
V_{RRM}	60	V
V_F @ 2 Apk, $T_J = 125^\circ\text{C}$	0.55	V
T_J range	-40 to 150	$^\circ\text{C}$

Description/Features

The 21DQ06 axial leaded Schottky rectifier has been optimized for very low forward voltage drop, with moderate leakage. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- Low profile, axial leaded outline
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

CASE STYLE AND DIMENSIONS

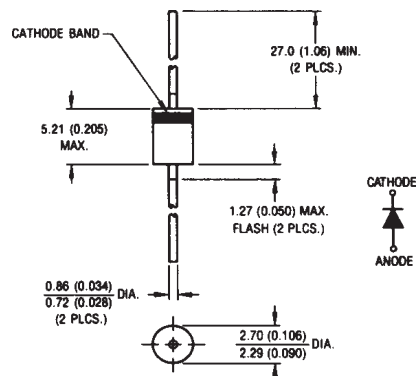

Conform to JEDEC Outline DO-204AL (DO-41)

Dimensions in millimeters and inches

Voltage Ratings

Part number	21DQ06
V_R Max. DC Reverse Voltage (V)	60
V_{RWM} Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters	21DQ06	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current	2	A	50% duty cycle @ $T_L = 106^\circ\text{C}$, rectangular waveform
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current	340	A	5 μs Sine or 3 μs Rect. pulse
	60		10ms Sine or 6ms Rect. pulse

Following any rated load condition and with rated V_{RRM} applied

Electrical Specifications

Parameters		21DQ06		Units	Conditions	
		Typ.	Max.			
V _{FM}	Max. Forward Voltage Drop (1)	0.53	0.60	V	@ 2A	T _J = 25 °C
		0.67	0.75	V	@ 4A	
		0.49	0.55	V	@ 2A	T _J = 125 °C
		0.61	0.67	V	@ 4A	
I _{RM}	Max. Reverse Leakage Current (1)	0.02	0.50	mA	T _J = 25 °C	V _R = rated V _R
		7.0	10	mA	T _J = 125 °C	
C _T	Typical Junction Capacitance	120		pF	V _R = 5V _{DC} ; (test signal range 100Khz to 1Mhz) 25°C	
L _S	Typical Series Inductance	8.0		nH	Measured lead to lead 5mm from package body	

(1) Pulse Width < 300 μs , Duty Cycle <2%

Thermal-Mechanical Specifications

Parameters	21DQ06	Units	Conditions
T_J Max. Junction Temperature Range	-40 to 150	$^\circ\text{C}$	
T_{stg} Max. Storage Temperature Range	-40 to 150	$^\circ\text{C}$	
R_{thJL} Max. Thermal Resistance Junction to Lead	25	$^\circ\text{C/W}$	DC operation 1/8 inch lead length
wt Approximate Weight	0.33(0.012)	g(oz.)	
Case Style	DO-204AL(DO-41)		

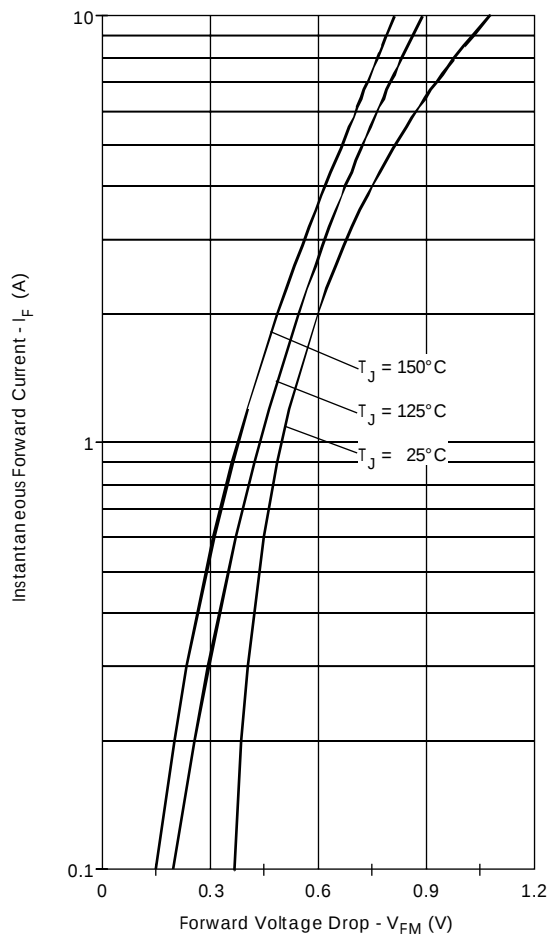


Fig. 1 - Maximum Forward Voltage Drop Characteristics

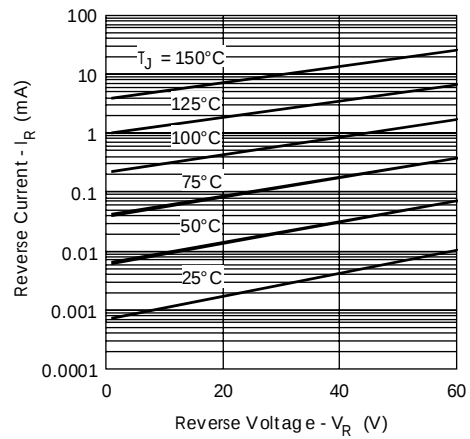


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

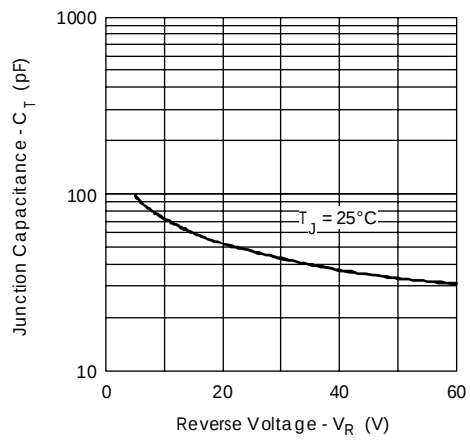


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

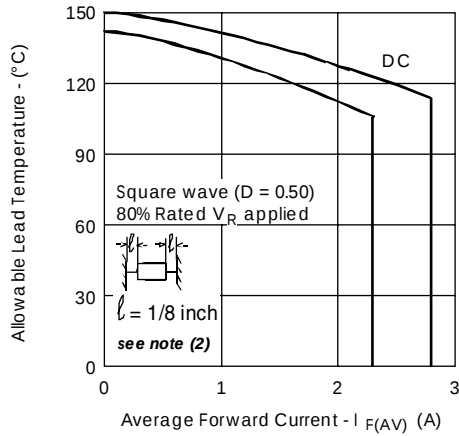


Fig. 4 - Maximum Allowable Lead Temperature Vs. Average Forward Current

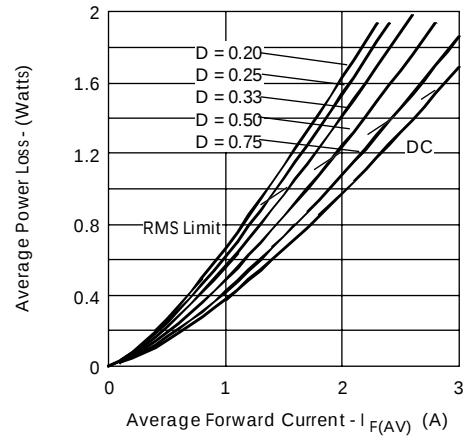


Fig. 5 - Forward Power Loss Characteristics

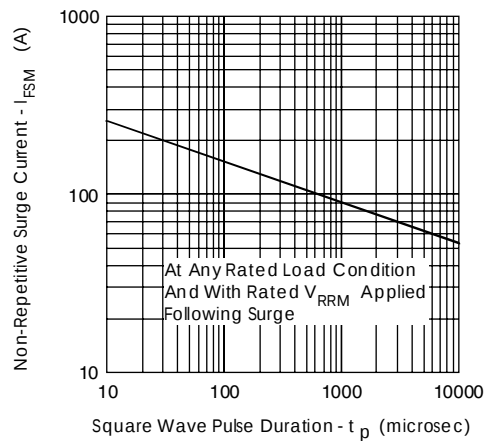


Fig. 6 - Maximum Non-Repetitive Surge Current

(2) Formula used: $T_L = T_J - (P_d + P_{d_{REV}}) \times R_{thJL}$;

P_d = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 5);

$P_{d_{REV}}$ = Inverse Power Loss = $V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1} = 80\%$ rated V_R

Ordering Information Table

Device Code				
21	D	Q	06	TR
①	②	③	④	⑤
1	-	21 = 2.1A (Axial and small packages - Current is x10)		
2	-	D = DO-41 package		
3	-	Q = Schottky Q.. Series		
4	-	06 = Voltage Rating : 60V		
5	-	TR = Tape & Reel package (5000 pcs)		
		TB = Tape & Box package (Ammunition -3000 pcs)		
		- = Box package (1000 pcs)		