

25CTQ... SERIES

SCHOTTKY RECTIFIER

30 Amp

Major Ratings and Characteristics



Characteristics	25CTQ...	Units
$I_{F(AV)}$ Rectangular waveform	30	A
V_{RRM} range	35 to 45	V
I_{FSM} @ $t_p = 5 \mu s$ sine	990	A
V_F @ 15 Apk, $T_J = 125^\circ C$ (per leg)	0.50	V
T_J range	-55 to 150	$^\circ C$

Description/Features

The 25CTQ center tap Schottky rectifier series has been optimized for very low forward voltage drop, with moderate leakage. The proprietary barrier technology allows for reliable operation up to 150° C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 150° C T_J operation
- Center tap TO-220 package
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

CASE STYLE AND DIMENSIONS

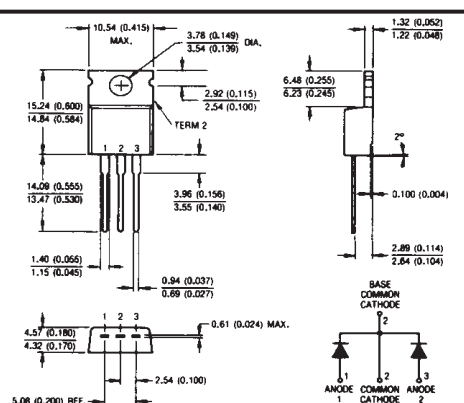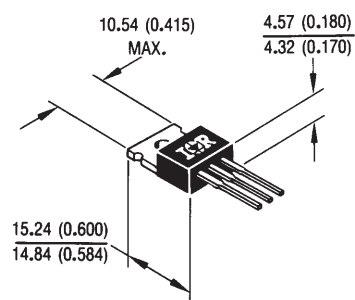

Conforms to JEDEC Outline TO - 220AB

Dimensions in millimeters and inches

Voltage Ratings

Part number	25CTQ035	25CTQ040	25CTQ045
V_R Max. DC Reverse Voltage (V)	35	40	45
V_{RWM} Max. Working Peak Reverse Voltage (V)			

Absolute Maximum Ratings

Parameters		25CTQ	Units	Conditions		
$I_{F(AV)}$	Max. Average Forward Current * See Fig. 5	30	A	50% duty cycle @ $T_C = 102^\circ\text{C}$, rectangular wave form		
I_{FSM}	Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7	990	A	5 μs Sine or 3 μs Rect. pulse	Following any rated load condition and with rated V_{RRM} applied	
		250		10ms Sine or 6ms Rect. pulse		
E_{AS}	Non-Repetitive Avalanche Energy (Per Leg)	20	mJ	$T_J = 25^\circ\text{C}$, $I_{AS} = 3\text{Amps}$, $L = 4.40\text{mH}$		
I_{AR}	Repetitive Avalanche Current (Per Leg)	3	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J , max. $V_A = 1.5 \times V_R$ typical		

Electrical Specifications

Parameters		25CTQ	Units	Conditions	
V _{FM}	Max. Forward Voltage Drop (Per Leg) * See Fig. 1 (1)	0.56	V	@ 15A	T _J = 25 °C
		0.71	V	@ 30A	
		0.50	V	@ 15A	T _J = 125 °C
		0.64	V	@ 30A	
I _{RM}	Max. Reverse Leakage Current (Per Leg) * See Fig. 2 (1)	1.75	mA	T _J = 25 °C	V _R = rated V _R
		70	mA	T _J = 125 °C	
C _T	Max. Junction Capacitance (Per Leg)	900	pF	V _R = 5V _{DC} , (test signal range 100Khz to 1Mhz) 25°C	
L _S	Typical Series Inductance (Per Leg)	8.0	nH	Measured lead to lead 5mm from package body	
dv/dt	Max. Voltage Rate of Change (Rated V _R)	10,000	V/ μs		

(1) Pulse Width < 300 μs , Duty Cycle <2%

Thermal-Mechanical Specifications

Parameters		25CTQ	Units	Conditions	
T _j	Max. Junction Temperature Range	-55 to 150	°C		
T _{stg}	Max. Storage Temperature Range	-55 to 150	°C		
R _{thJC}	Max. Thermal Resistance Junction to Case (Per Leg)	3.25	°C/W	DC operation	* See Fig. 4
R _{thJC}	Max. Thermal Resistance Junction to Case (Per Package)	1.63	°C/W	DC operation	
R _{thCS}	Typical Thermal Resistance, Case to Heatsink	0.50	°C/W	Mounting surface , smooth and greased	
wt	Approximate Weight	2.0 (0.07)	g (oz.)		
T	Mounting Torque	Min.	6 (5)	Kg-cm (lbf-in)	
		Max.	12 (10)		
Case Style		TO-220AB		JEDEC	

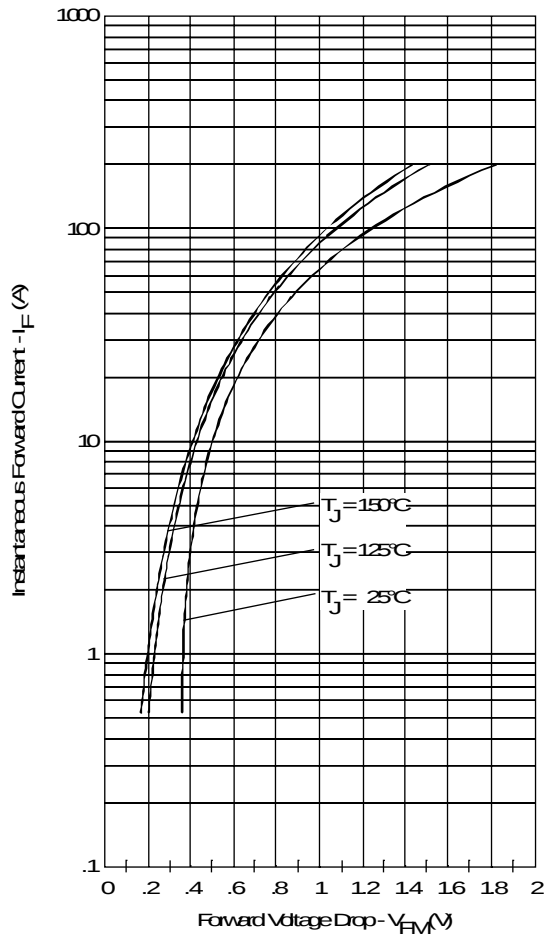


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

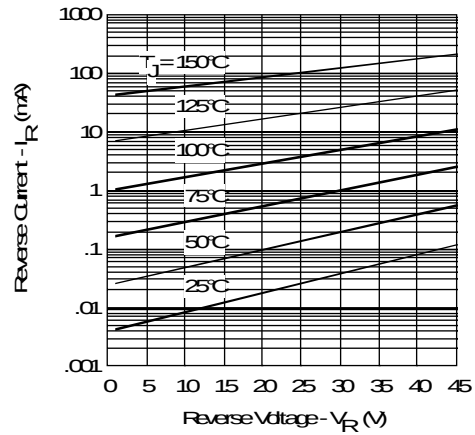


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

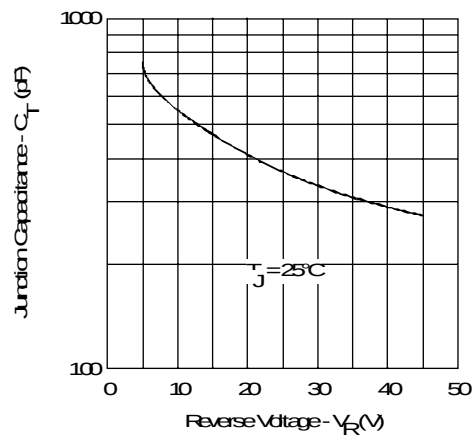


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

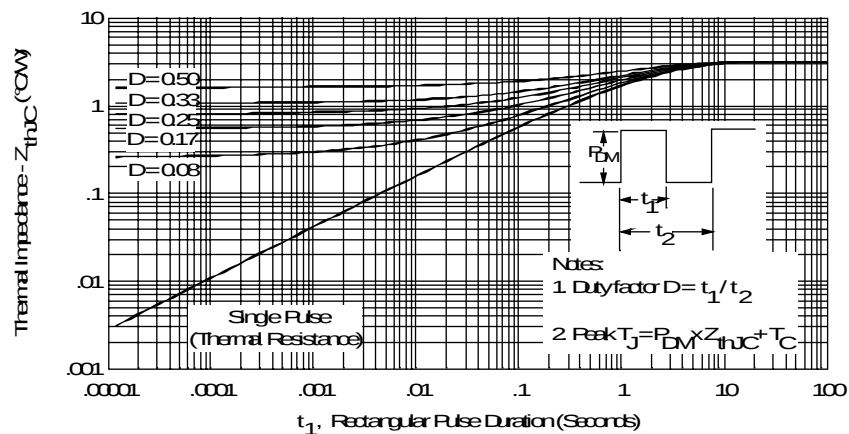


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

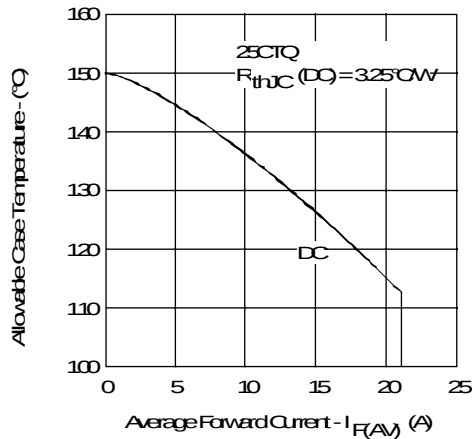


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

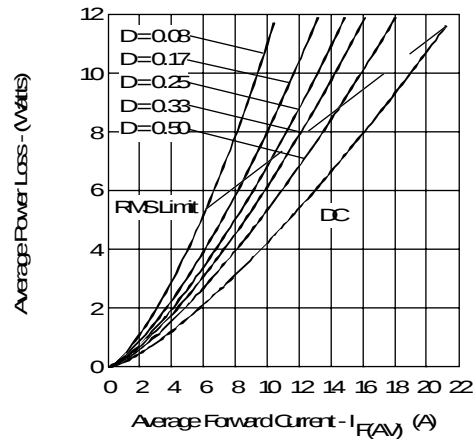


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

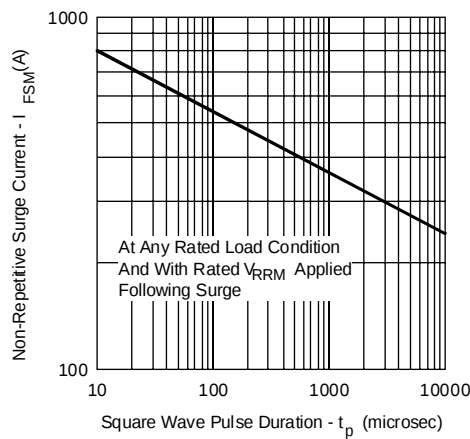


Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)

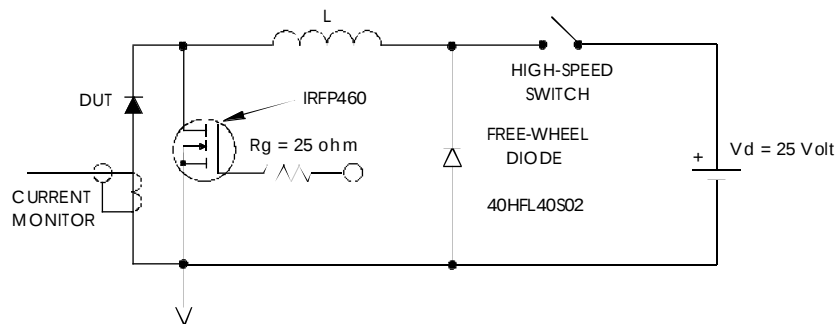


Fig. 8 - Unclamped Inductive Test Circuit