

60CDQ... SERIES

SCHOTTKY RECTIFIER

60 Amp


Major Ratings and Characteristics

Characteristics	60CDQ...	Units
$I_{F(AV)}$ Rectangular waveform	60	A
V_{RRM}	35 to 45	V
I_{FSM} @ $t_p=5\ \mu s$ sine	2300	A
V_F @ $30\text{Apk}, T_J=125^\circ\text{C}$ (per leg)	0.62	V
T_J	-65 to 175	$^\circ\text{C}$

Description/Features

The 60CDQ center tap Schottky rectifier series has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 175°C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- $175^\circ\text{C} T_J$ operation
- Center tap TO-3 package
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Hermetic packaging

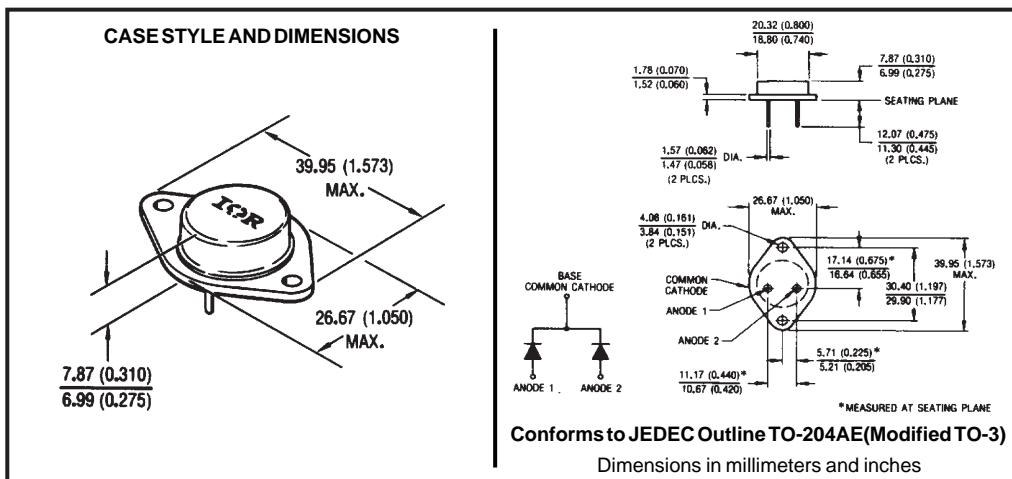

Voltage Ratings

Part number	60CDQ035	60CDQ040	60CDQ045
V_R Max. DC Reverse Voltage (V)	35	40	45
V_{RWM} Max. Working Peak Reverse Voltage (V)			

Absolute Maximum Ratings

Parameters	60CDQ	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current * See Fig. 5	60	A	50% duty cycle @ $T_J = 112^\circ\text{C}$, rectangular waveform
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7	2300	A	5μs Sine or 3μs Rect. pulse
	420		10ms Sine or 6ms Rect. pulse
E_{AS} Non-Repetitive Avalanche Energy (Per Leg)	40	mJ	$T_J = 25^\circ\text{C}$, $I_{AS} = 6$ Amps, $L = 2.2$ mH
I_{AR} Repetitive Avalanche Current (Per Leg)	6	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical

Electrical Specifications

Parameters	60CDQ	Units	Conditions
V_{FM} Max. Forward Voltage Drop (Per Leg) * See Fig. 1 (1)	0.67	V	$T_J = 25^\circ\text{C}$
	0.87	V	
	0.62	V	$T_J = 125^\circ\text{C}$
	0.80	V	
I_{RM} Max. Reverse Leakage Current (Per Leg) * See Fig. 2 (1)	2.5	mA	$V_R = \text{rated } V_R$
	25	mA	
C_T Max. Junction Capacitance (Per Leg)	1400	pF	$V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz) 25°C
L_S Typical Series Inductance (Per Leg)	10.0	nH	Measured mounting plane to lead 5mm from package body
dv/dt Max. Voltage Rate of Change (Rated V_R)	10,000	V/ μs	

(1) Pulse Width < 300μs, Duty Cycle <2%

Thermal-Mechanical Specifications

Parameters	60CDQ	Units	Conditions
T_J Max. Junction Temperature Range	-65 to 175	°C	
T_{stg} Max. Storage Temperature Range	-65 to 175	°C	
R_{thJC} Max. Thermal Resistance Junction to Case (Per Leg)	2.20	°C/W	DC operation * See Fig. 4
R_{thJC} Max. Thermal Resistance Junction to Case (Per Package)	1.10	°C/W	DC operation
R_{thCS} Typical Thermal Resistance, Case to Heatsink	0.20	°C/W	Mounting surface, smooth and greased
wt Approximate Weight	11.4(0.40)	g(oz.)	
T Mounting Torque	Min.	12(10)	Kg-cm (lbf-in)
	Max.	17(15)	
Case Style	TO-204AE(TO-3)		Modified JEDEC

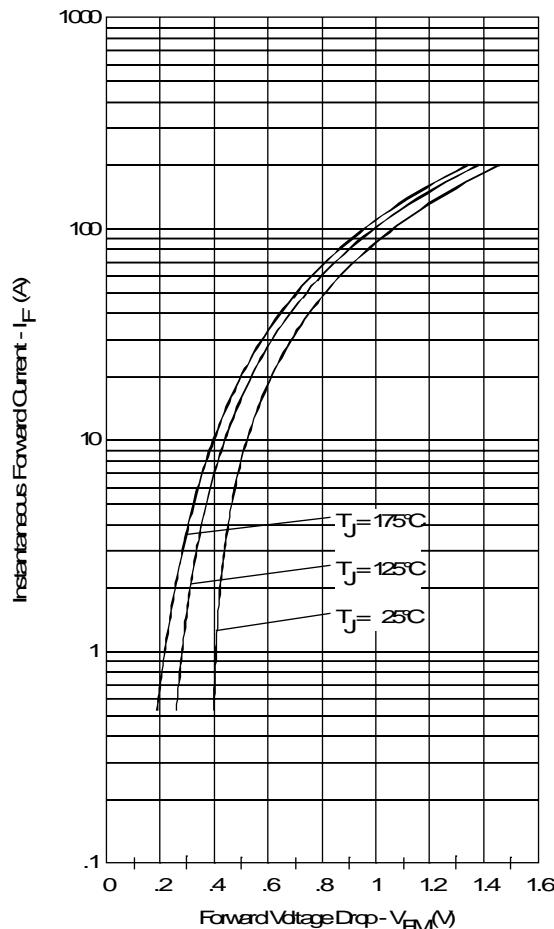


Fig. 1-Max. Forward Voltage Drop Characteristics
 (PerLeg)

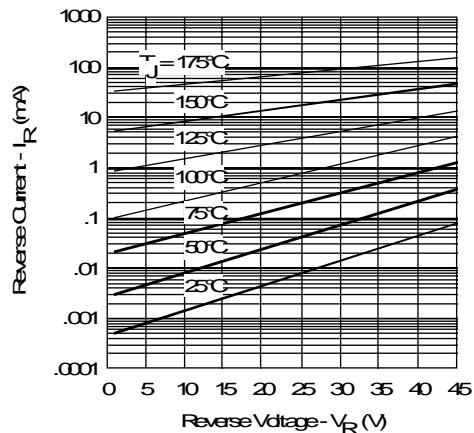


Fig. 2-Typical Values Of Reverse Current
 Vs. Reverse Voltage (PerLeg)

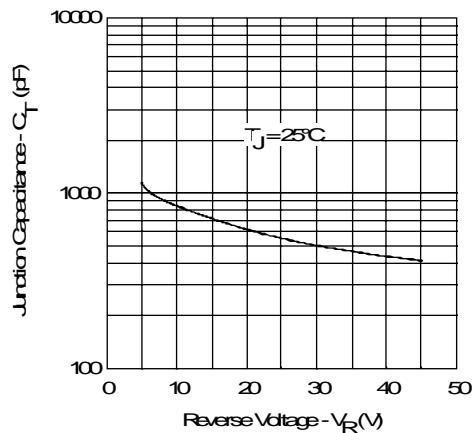


Fig. 3-Typical Junction Capacitance
 Vs. Reverse Voltage (PerLeg)

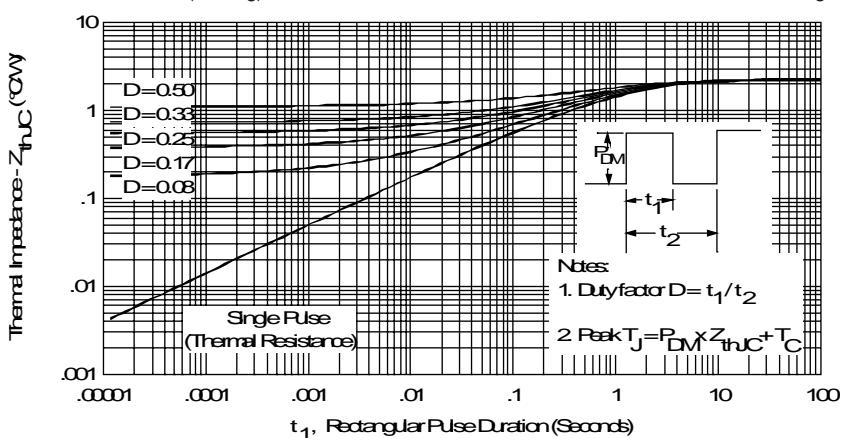


Fig. 4-Max. Thermal Impedance Z_{thJC} Characteristics (PerLeg)

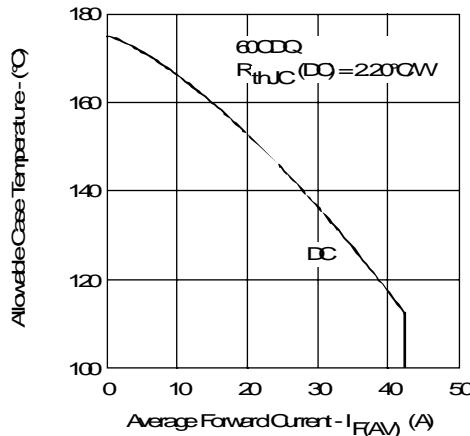


Fig.5-Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

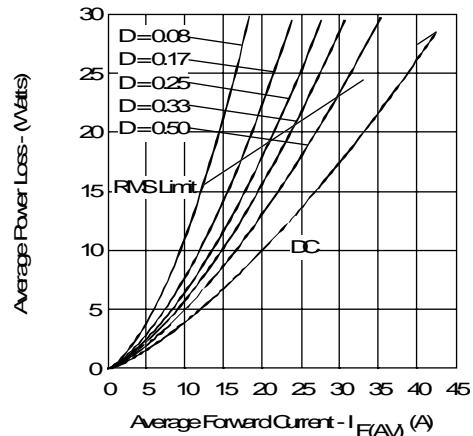


Fig.6-Forward Power Loss Characteristics (Per Leg)

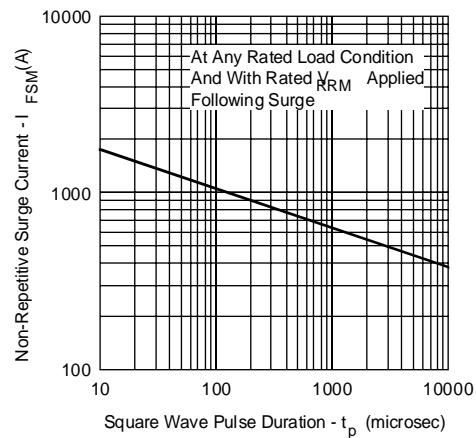


Fig.7-Max. Non-Repetitive Surge Current (Per Leg)

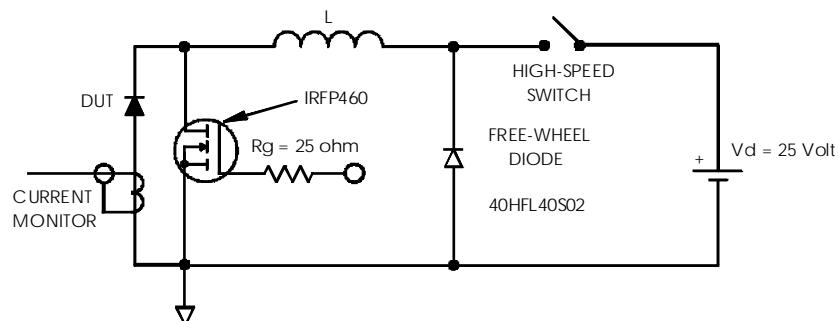


Fig.8-Unclamped Inductive Test Circuit