

Major Ratings and Characteristics



Characteristics	8EQ045	Units
$I_{F(AV)}$ Rectangular waveform	10	A
V_{RRM}	45	V
I_{FSM} @ $t_p = 8.3ms$ sine	250	A
V_F @ 10Apk, $T_J = 125^\circ C$	0.58	V
T_J, T_{stg} Operating and storage	-55 to 150	$^\circ C$

Description/Features

The 8EQ045 Schottky rectifier has been expressly designed to meet the rigorous requirements of hi -rel environments. It is packaged in the hermetic surface mount LCC ceramic package and has extremely low reverse leakage at high temperature. Full MIL-PRF-19500 quality conformance testing is available on source control drawings to JANTX, JANTXV, or JANS levels. Typical applications include switching power supplies and resonant power converters.

- Hermetically sealed
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Surface Mount
- Small Footprint
- Lightweight

CASE STYLE

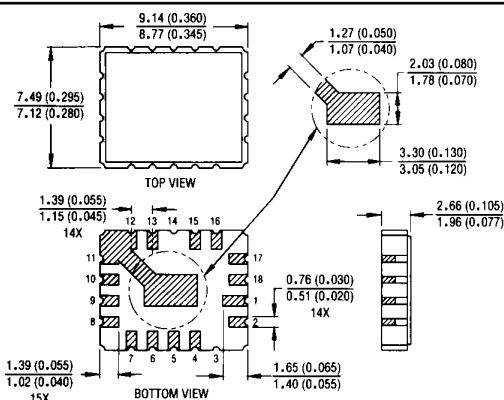

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES)

IR Case Style Leadless Chip Carrier (LCC)
Dimensions in millimeters and (inches)

Voltage Ratings

Part number	8EQ045
V _R Max. DC Reverse Voltage (V)	45
V _{RWM} Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters	8EQ045	Units	Conditions
I _{F(AV)} Max. Average Forward Current See Fig. 4	10	A	50% duty cycle @ T _C = 100°C, rectangular waveform
I _{FSM} Max. Peak One Cycle Non - Repetitive Surge Current	250	A	@ t _p = 8.3 ms sine

Electrical Specifications

Parameters	8EQ045	Units	Conditions
V _{FM} Max. Forward Voltage Drop See Fig. 1 ①	0.65	V	@ 10A
	0.84	V	@ 20A
	0.58	V	@ 10A
	0.77	V	@ 20A
I _{RM} Max. Reverse Leakage Current See Fig. 2 ①	0.50	mA	T _J = 25°C
	15	mA	T _J = 125°C
C _T Max. Junction Capacitance	900	pF	V _R = 5V _{DC} , (test signal range 100KHz to 1MHz) 25°C
L _S Typical Series Inductance	4.3	nH	Measured lead to lead 5mm from package body

Thermal-Mechanical Specifications

Parameters	8EQ045	Units	Conditions
T _J Max. Junction Temperature Range	-55 to 150	°C	
T _{stg} Max. Storage Temperature Range	-55 to 150	°C	
R _{thJC} Max. Thermal Resistance, Junction to Case	6.0	°C/W	DC operation See Fig. 5
wt Weight (Typical)	0.42	g	
Die Description (Square)	0.125	inches	
Case Style	LCC		

① Pulse Width < 300μs, Duty Cycle < 2%

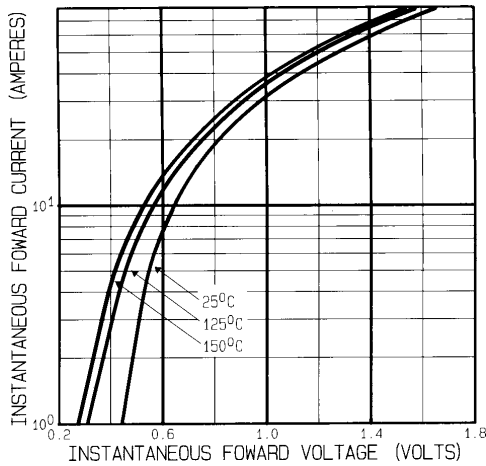


Fig. 1 - Max. Forward Voltage Drop Characteristics
(Per Leg)

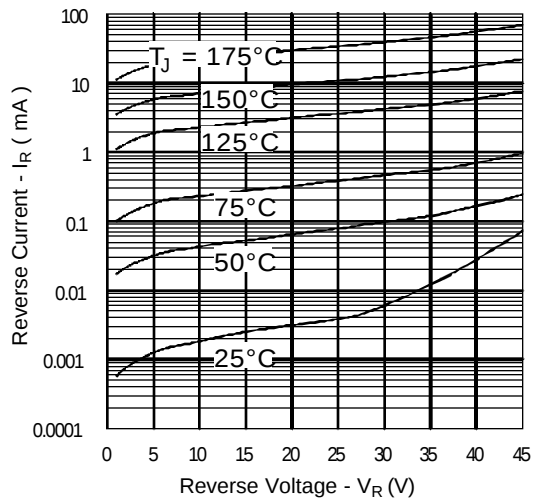


Fig. 2 - Typical Values of Reverse Current
Vs. Reverse Voltage (Per Leg)

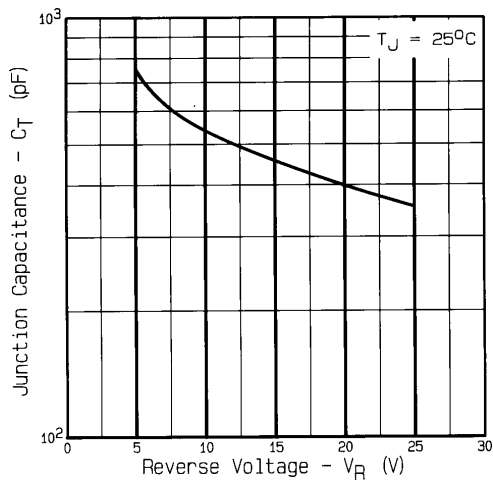


Fig. 3 - Typical Junction Capacitance Vs.
Reverse Voltage (Per Leg)

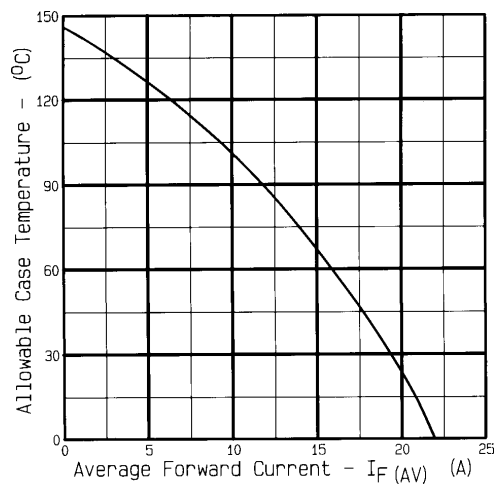
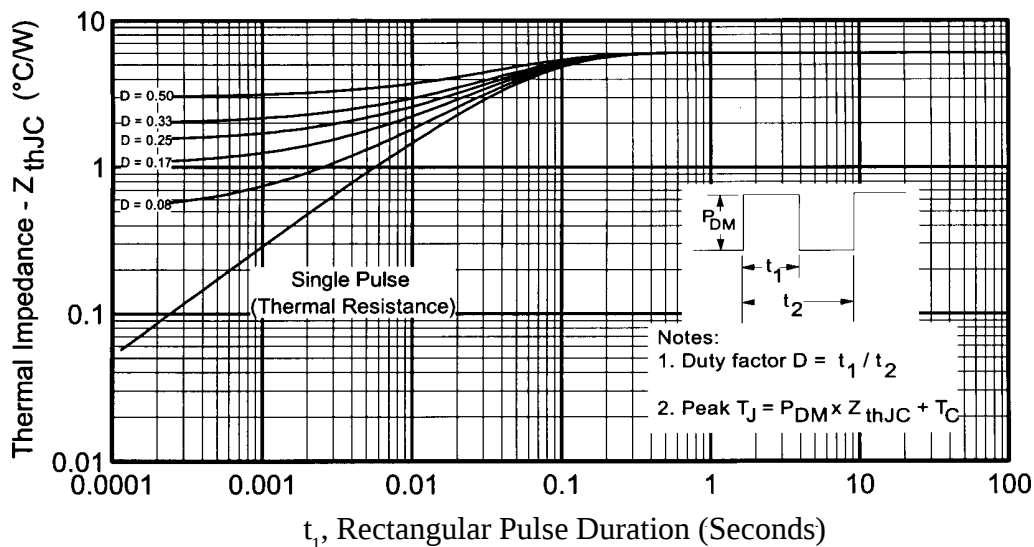


Fig. 4 - Max. Allowable Case Temperature Vs.
Average Forward Current (Per Leg)

Fig.5 - Max. Thermal Impedance Z_{thJC} characteristics (Per Leg)International
IOR Rectifier**WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, Tel: (310) 322 3331**EUROPEAN HEADQUARTERS:** Hurst Green, Oxted, Surrey RH8 9BB, UK Tel: ++ 44 1883 732020**IR CANADA:** 7321 Victoria Park Ave., Suite 201, Markham, Ontario L3R 2Z8, Tel: (905) 475 1897**IR GERMANY:** Saalburgstrasse 157, 61350 Bad Homburg Tel: ++ 49 6172 96590**IR ITALY:** Via Liguria 49, 10071 Borgaro, Torino Tel: ++ 39 11 451 0111**IR FAR EAST:** K&H Bldg., 2F, 30-4 Nishi-Ikeburo 3-Chome, Toshima-Ku, Tokyo Japan 171 Tel: 81 3 3983 0086**IR SOUTHEAST ASIA:** 315 Outram Road, #10-02 Tan Boon Liat Building, Singapore 0316 Tel: 65 221 8371<http://www.irf.com/Data> and specifications subject to change without notice. 11/96