

GBPC.. Series

SINGLE PHASE BRIDGE

Power Modules

Features

- Universal, 3 way terminals:
push-on, wrap around or solder
- High thermal conductivity package,
electrically insulated case
- Polarity symbols are moulded on
body of the plastic box
- Center hole fixing
- Glass passivated diode chips
- Excellent power/ volume ratio
- Terminals suitable for High Temperature
soldering at 250 - 260°C
max. time 8 - 10 seconds
- Wire lead version available
- UL approval under progress

Description

A range of extremely compact, encapsulated single phase bridge rectifiers offering efficient and reliable operation. They are intended for use in general purpose and instrumentation applications.

Major Ratings and Characteristics

Parameters	GBPC25	GBPC35	Units
I_O	25	35	A
@ T_C	60	55	°C
I_{FSM} @ 50Hz	400	475	A
@ 60Hz	420	500	A
I^2t @ 50Hz	790	1130	A ² s
@ 60Hz	725	1030	A ² s
V_{RRM} range	200 to 1200		V
T_J	-55 to 150		°C

25 A
35 A



GBPC...A



GBPC...W

GBPC.. Series

Preliminary Data Sheet I27505 rev. B 05/00

International
IOR Rectifier

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V_{RRM} , max repetitive peak AC rev. voltage $T_J = T_J \text{ max.}$ V	V_{RSM} , max non-repetitive peak AC rev. voltage $T_J = T_J \text{ max.}$ V	$I_{RRM} \text{ max.}$ @ rated V_{RRM} $T_J = T_J \text{ max.}$ mA	$I_{RRM} \text{ max.}$ D.C. rev. curr. @ $T = 125^\circ\text{C}$ (μA)
GBPC25/35..A GBPC25/35..W (*)	02	200	275	2	500
	04	400	500	2	500
	06	600	725	2	500
	08	800	900	2	500
	10	1000	1100	2	500
	12	1200	1300	2	500

(*) please see Ordering Information Table - page 3

Forward Conduction

Parameters	GBPC25	GBPC35	Units	Conditions
I_O Maximum DC output current	25	35	A	Resistive or inductive load
	20	28	A	Capacitive load
	60	55	$^\circ\text{C}$	
I_{FSM} Maximum peak, one-cycle non-repetitive forward current	400	475	A	$t = 10\text{ms}$ No voltage
	420	500		$t = 8.3\text{ms}$ reapplied
	335	400		$t = 10\text{ms}$ 100% V_{RRM}
	350	420		$t = 8.3\text{ms}$ reapplied
I^2t Maximum I^2t for fusing	790	1130	A^2s	$t = 10\text{ms}$ No voltage
	725	1030		$t = 8.3\text{ms}$ reapplied
	560	800		$t = 10\text{ms}$ 100% V_{RRM}
	512	730		$t = 8.3\text{ms}$ reapplied
I^2/t Maximum I^2/t for fusing	7.9	11.3	KA^2/s	I^2t for time $t_x = I^2 \sqrt{t_x} / I_x$; $0.1 \leq t_x \leq 10\text{ms}$, $V_{RRM} = 0\text{V}$
$V_{F(TO)1}$ Low-level of threshold voltage	0.76	0.77	V	$(16.7\% \times \pi \times I_{F(AV)}) < I < \pi \times I_{F(AV)}$, @ $T_J \text{ max.}$
$V_{F(TO)2}$ High-level of threshold voltage	0.89	0.92		$(I > \pi \times I_{F(AV)})$, @ $T_J \text{ max.}$
r_{t1} Low-level forward slope resistance	8.2	4.852	$\text{m}\Omega$	$(16.7\% \times \pi \times I_{F(AV)}) < I < \pi \times I_{F(AV)}$, @ $T_J \text{ max.}$
r_{t2} High-level forward slope resistance	6.8	3.867		$(I > \pi \times I_{F(AV)})$, @ $T_J \text{ max.}$
V_{FM} Maximum forward voltage drop	1.1	1.1	V	$T_J = 25^\circ\text{C}$, $I_{FM} = I_{Fav}(\text{arm})$
I_{RRM} Max. DC reverse current	5.0	5.0	μA	$T_J = 25^\circ\text{C}$, per diode at V_{RRM}
V_{INS} RMS isolation voltage base plate	2700	2700	V	$f = 50 \text{ Hz}$, $t = 1\text{s}$

Thermal and Mechanical Specifications

Parameters	GBPC25	GBPC35	Units	Conditions
T_J Junction temperature range	-55 to 150		°C	
T_{stg} Storage temperature range	-55 to 150		°C	
R_{thJC} Max. thermal resistance junct. to case	1.7	1.4	K/W	Per bridge
R_{thCS} Max. thermal resist., case to heatsink	0.2		K/W	Mounting surface, smooth, flat and greased
wt Approximate weight	16		g	
T Mounting Torque $\pm 10\%$	2.0		Nm	Bridge to heatsink

Ordering Information Table

Device Code			
GBPC	35	12	A
①	②	③	④
1	Circuit configuration: Single phase bridge coding		
2	Current rating code: _____		
	25	=	25A (Avg)
	35	=	35A (Avg)
3	Voltage Code: code x 100 = V_{RRM}		
4	Diode bridge rectifier:		
	A	=	Standard Fasten Terminal
	W	=	Wire Lead

Outline Table

GBPC...A	GBPC...W
Top view dimensions: 28.5 ± 0.3, 18.1 ± 0.5, 14.3 ± 0.5, 16.6 ± 0.5, 16.6 ± 0.5, 28.5 ± 0.3, 14.3 ± 0.5, 20 ± 1.2, 0.81 ± 0.08, 6.35 (4x), 2.4, 7.5 ± 0.15, 5.3 ± 0.2. Side view dimensions: 20 ± 1.2, 7.5 ± 0.15.	Top view dimensions: 28.5 ± 0.3, 18.1 ± 0.5, 14.3 ± 0.5, 16.6 ± 0.5, 16.6 ± 0.5, 28.5 ± 0.3, 14.3 ± 0.5, 20 ± 1.2, 0.81 ± 0.08, 6.35 (4x), 2.4, 7.5 ± 0.15, 5.3 ± 0.2. Side view dimensions: 20 ± 1.2, 7.5 ± 0.15.

All dimensions are in millimeters

GBPC.. Series

Preliminary Data Sheet I27505 rev. B 05/00

International
IOR Rectifier

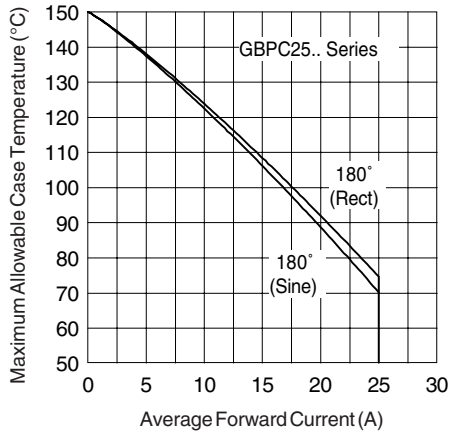


Fig. 1 - Current Ratings Characteristics

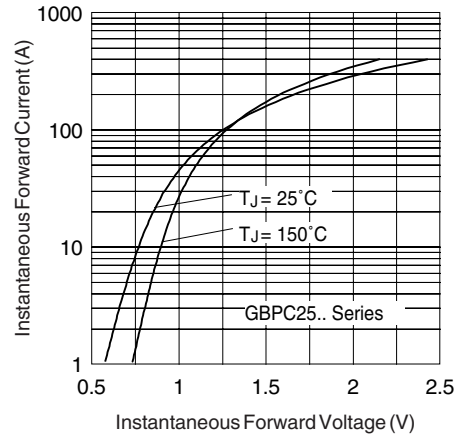


Fig. 2 - Forward Voltage Drop Characteristics

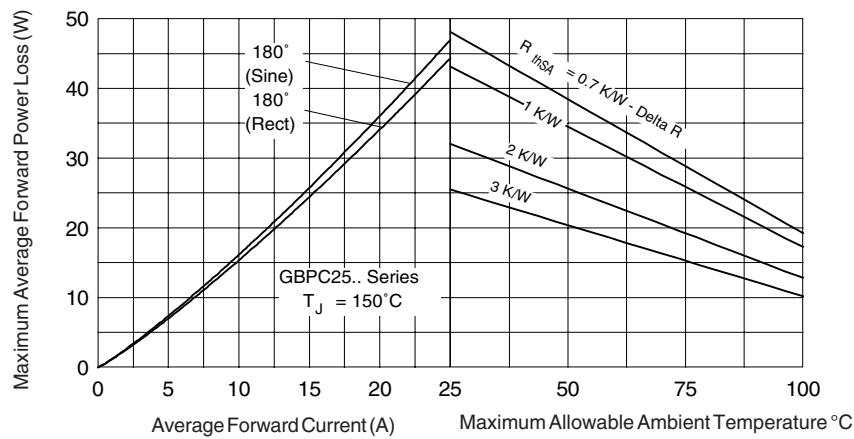


Fig. 3 - Total Power Loss Characteristics

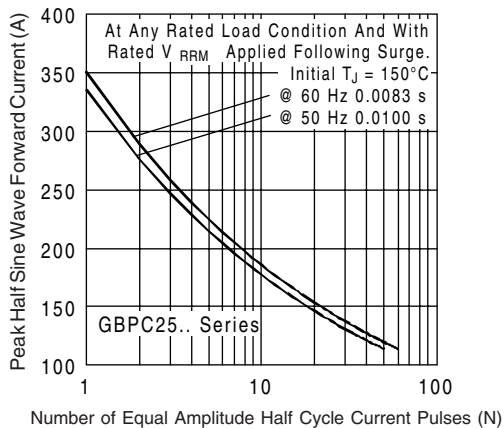


Fig. 4 - Maximum Non-Repetitive Surge Current

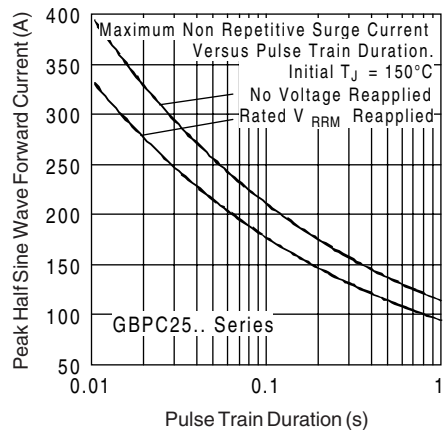


Fig. 5 - Maximum Non-Repetitive Surge Current

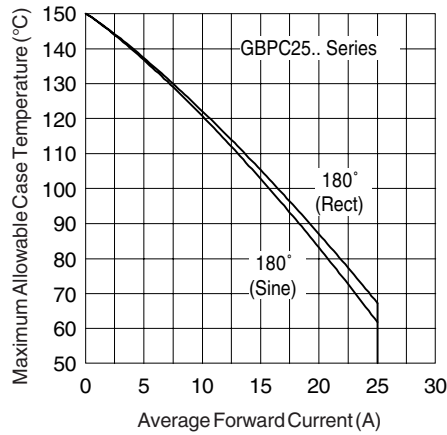


Fig. 6 - Current Ratings Characteristics

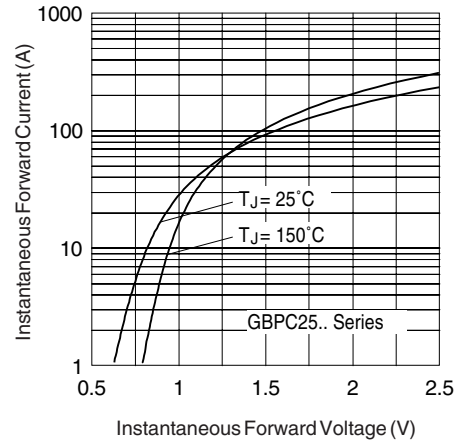


Fig. 7 - Forward Voltage Drop Characteristics

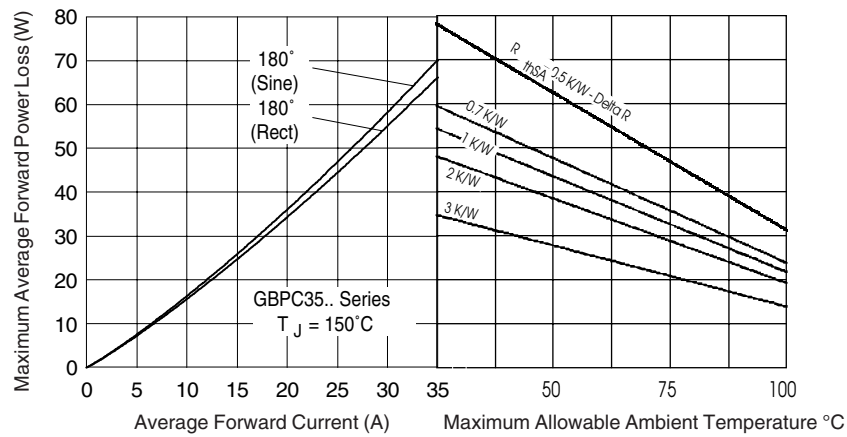


Fig. 8 - Total Power Loss Characteristics

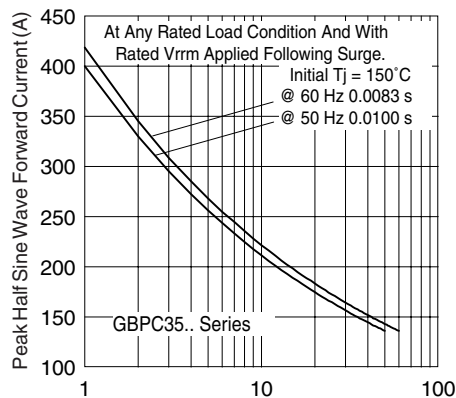


Fig. 9 - Maximum Non-Repetitive Surge Current

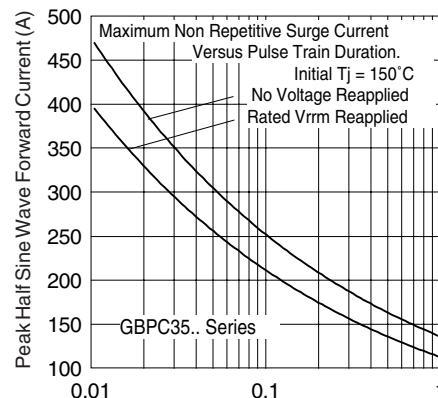


Fig. 10 - Maximum Non-Repetitive Surge Current

GBPC.. Series

Preliminary Data Sheet I27505 rev. B 05/00

International
IOR Rectifier

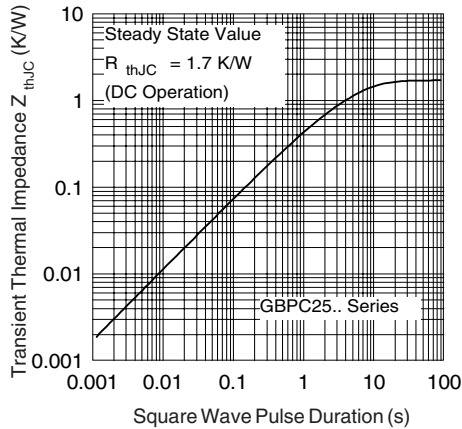


Fig. 11 - Thermal Impedance Z_{thJC} Characteristic

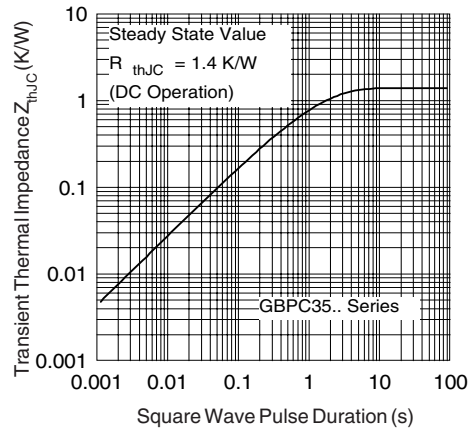


Fig. 12 - Thermal Impedance Z_{thJC} Characteristic

International
IOR Rectifier

WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245 U.S.A. Tel: (310) 322 3331. Fax: (310) 322 3332.
EUROPEAN HEADQUARTERS: Hurst Green, Oxted, Surrey RH8 9BB, U.K. Tel: ++ 44 1883 732020. Fax: ++ 44 1883 733408.
IR CANADA: 15 Lincoln Court, Brampton, Markham, Ontario L6T3Z2. Tel: (905) 453 2200. Fax: (905) 475 8801.
IR GERMANY: Saalburgstrasse 157, 61350 Bad Homburg. Tel: ++ 49 6172 96590. Fax: ++ 49 6172 965933.
IR ITALY: Via Liguria 49, 10071 Borgaro, Torino. Tel: ++ 39 11 4510111. Fax: ++ 39 11 4510220.
IR FAR EAST: K&H Bldg., 2F, 30-4 Nishi-Ikebukuro 3-Chome, Toshima-Ku, Tokyo, Japan 171. Tel: 81 3 3983 0086.
IR SOUTHEAST ASIA: 1 Kim Seng Promenade, Great World City West Tower, 13-11, Singapore 237994. Tel: ++ 65 838 4630.
IR TAIWAN: 16 Fl. Suite D.207, Sec. 2, Tun Haw South Road, Taipei, 10673, Taiwan. Tel: 886 2 2377 9936.

<http://www.irf.com>

Fax-On-Demand: +44 1883 733420

Data and specifications subject to change without notice.