


# HFA70NK60C

Ultrafast, Soft Recovery Diode

## Features


- Reduced RFI and EMI
- Reduced Snubbing
- Extensive Characterization of Recovery Parameters

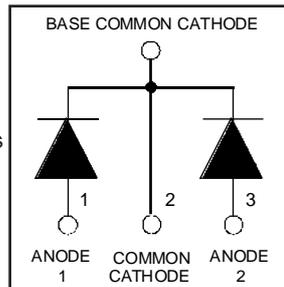

|   |
|---|
| $V_R = 600V$  |
| $V_F(\text{typ.})^{\text{Ⓢ}} = 1.2V$                  |
| $I_{F(AV)} = 70A$                                     |
| $Q_{rr}(\text{typ.}) = 210nC$                         |
| $I_{RRM}(\text{typ.}) = 6A$                           |
| $t_{rr}(\text{typ.}) = 30ns$                          |
| $di_{(rec)M}/dt(\text{typ.})^{\text{Ⓢ}} = 180A/\mu s$ |

## Description

HEXFRED™ diodes are optimized to reduce losses and EMI/RFI in high frequency power conditioning systems. An extensive characterization of the recovery behavior for different values of current, temperature and di/dt simplifies the calculations of losses in the operating conditions. The softness of the recovery eliminates the need for a snubber in most applications. These devices are ideally suited for power converters, motors drives and other applications where switching losses are significant portion of the total losses.

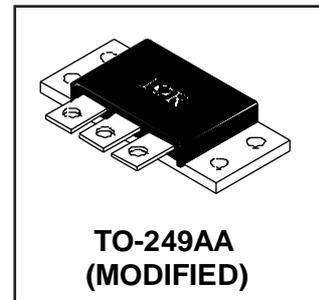

## Absolute Maximum Ratings (per Leg)

|                           | Parameter                                | Max.                              | Units      |
|---------------------------|--|-----------------------------------|------------|
| $V_R$                     | Cathode-to-Anode Voltage                 | 600                               | V          |
| $I_F @ T_C = 25^\circ C$  | Continuous Forward Current               | 59                                | A          |
| $I_F @ T_C = 100^\circ C$ | Continuous Forward Current               | 29                                |            |
| $I_{FSM}$                 | Single Pulse Forward Current ①           | 200                               |            |
| $I_{AS}$                  | Maximum Single Pulse Avalanche Current ② | 2.0                               |            |
| $E_{AS}$                  | Non-Repetitive Avalanche Energy ②        | 220                               | $\mu J$    |
| $P_D @ T_C = 25^\circ C$  | Maximum Power Dissipation                | 160                               | W          |
| $P_D @ T_C = 100^\circ C$ | Maximum Power Dissipation                | 63                                |            |
| $T_J$                     | Operating Junction and                   | -55 to +150                       | $^\circ C$ |
| $T_{STG}$                 | Storage Temperature Range                |                                   |            |
|                           | Soldering Temperature, for 10 sec.       | 300 (0.063 in. (1.6mm) from case) |            |

## Thermal - Mechanical Characteristics

|                 | Parameter                               | Min.     | Typ.     | Max.     | Units              |
|-----------------|---|----------|----------|----------|--------------------|
| $R_{\theta JC}$ | Junction-to-Case, Single Leg Conducting | ----     | ----     | 0.80     | $^\circ C/W$<br>KW |
|                 | Junction-to-Case, Both Legs Conducting  | ----     | ----     | 0.40     |                    |
| $R_{\theta CS}$ | Case-to-Sink, Flat, Greased Surface     | ----     | 0.10     | ----     |                    |
| $Wt$            | Weight                                  | ----     | 58 (2.0) | ----     | g (oz)             |
|                 | Mounting Torque                         | 35 (4.0) | ----     | 50 (5.7) | lbf•in<br>(N•m)    |

**Note:** ① Limited by junction temperature  
 ②  $L = 100\mu H$ , duty cycle limited by max  $T_J$   
 ③  $125^\circ C$

# HFA70NK60C


International  
**IOR** Rectifier


## Electrical Characteristics (per Leg) @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

|          | Parameter                       | Min. | Typ. | Max. | Units         | Test Conditions   |
|----------|---------------------------------|------|------|------|---------------|---|
| $V_{BR}$ | Cathode Anode Breakdown Voltage | 600  | —    | —    | V             | $I_R = 100\mu\text{A}$                                  |
| $V_{FM}$ | Max Forward Voltage             | —    | 1.3  | 1.5  | V             | $I_F = 35\text{A}$                                      |
|          |                                 | —    | 1.5  | 1.7  |               | $I_F = 70\text{A}$ See Fig. 1                           |
|          |                                 | —    | 1.2  | 1.4  |               | $I_F = 35\text{A}, T_J = 125^\circ\text{C}$             |
| $I_{RM}$ | Max Reverse Leakage Current     | —    | 2.0  | 10   | $\mu\text{A}$ | $V_R = V_R$ Rated                                       |
|          |                                 | —    | 0.50 | 2.0  | $\text{mA}$   | $T_J = 125^\circ\text{C}, V_R = 480\text{V}$ See Fig. 2 |
| $C_T$    | Junction Capacitance            | —    | 68   | 100  | $\text{pF}$   | $V_R = 200\text{V}$ See Fig. 3                          |
| $L_S$    | Series Inductance               | —    | 9.2  | —    | $\text{nH}$   | Lead to lead 5mm from package body                      |


## Dynamic Recovery Characteristics (per Leg) @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

|                   | Parameter  | Min. | Typ. | Max. | Units                  | Test Conditions  |
|-------------------|--|------|------|------|------------------------|--|
| $t_{rr}$          | Reverse Recovery Time                              | —    | 30   | —    | ns                     | $I_F = 1.0\text{A}, di/dt = 200\text{A}/\mu\text{s}, V_R = 30\text{V}$ |
| $t_{rr1}$         |  | —    | 70   | 110  |                        | $T_J = 25^\circ\text{C}$ See Fig. 4                                    |
| $t_{rr2}$         |  | —    | 115  | 180  |                        | $T_J = 125^\circ\text{C}$ 5  |
| $I_{RRM1}$        | Peak Recovery Current                              | —    | 6.0  | 11   | A                      | $T_J = 25^\circ\text{C}$ See Fig. 4                                    |
| $I_{RRM2}$        |  | —    | 9.0  | 16   |                        | $T_J = 125^\circ\text{C}$ 6  |
| $Q_{rr1}$         | Reverse Recovery Charge                            | —    | 210  | 580  | nC                     | $T_J = 25^\circ\text{C}$ See Fig. 4                                    |
| $Q_{rr2}$         |  | —    | 520  | 1400 |                        | $T_J = 125^\circ\text{C}$ 7  |
| $di_{(rec)M}/dt1$ | Peak Rate of Fall of Recovery Current During $t_b$ | —    | 280  | —    | $\text{A}/\mu\text{s}$ | $T_J = 25^\circ\text{C}$ See Fig. 4                                    |
| $di_{(rec)M}/dt2$ |  | —    | 180  | —    |                        | $T_J = 125^\circ\text{C}$ 8  |

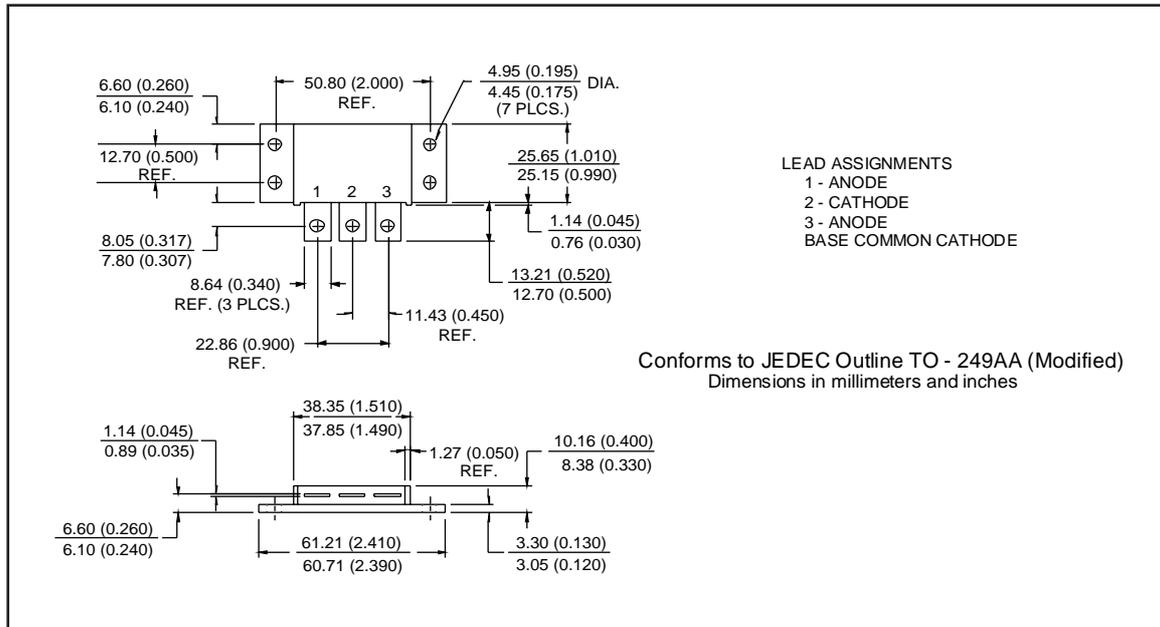


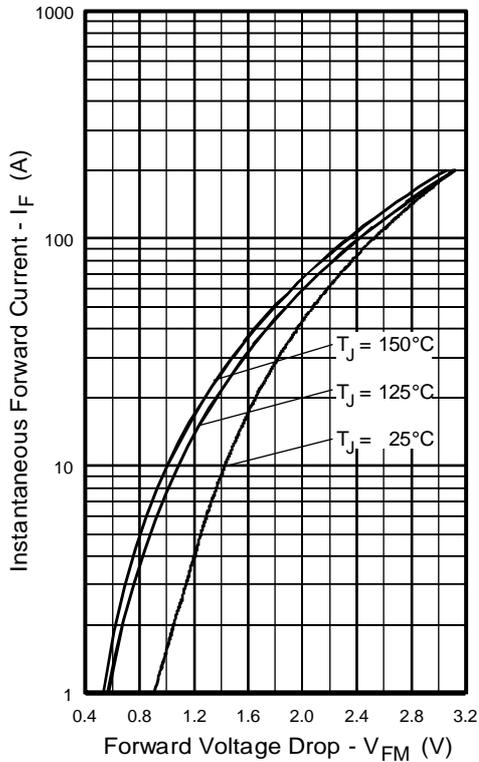


**Fig. 1 - Maximum Forward Voltage Drop vs. Instantaneous Forward Current, (per Leg)**

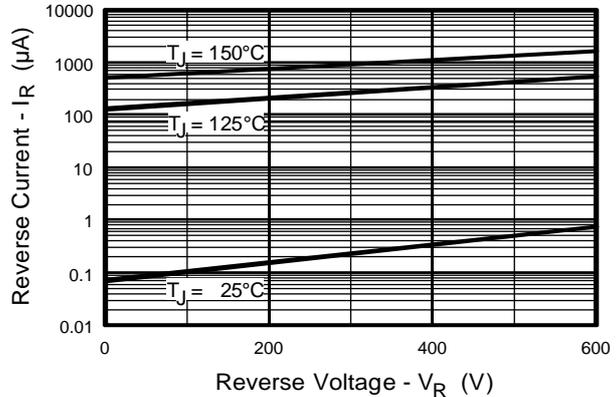


**Fig. 2 - Typical Reverse Current vs. Reverse Voltage, (per Leg)**

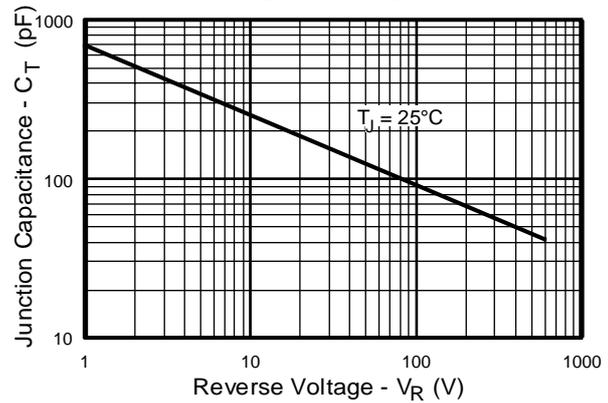


**Fig. 3 - Typical Junction Capacitance vs. Reverse Voltage, (per Leg)**

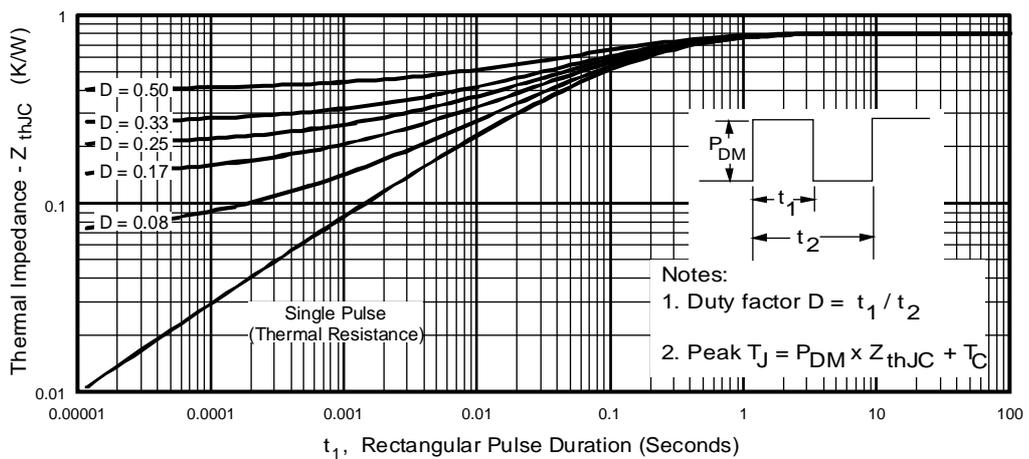


**Fig. 4 - Maximum Thermal Impedance  $Z_{thJC}$  Characteristics, (per Leg)**

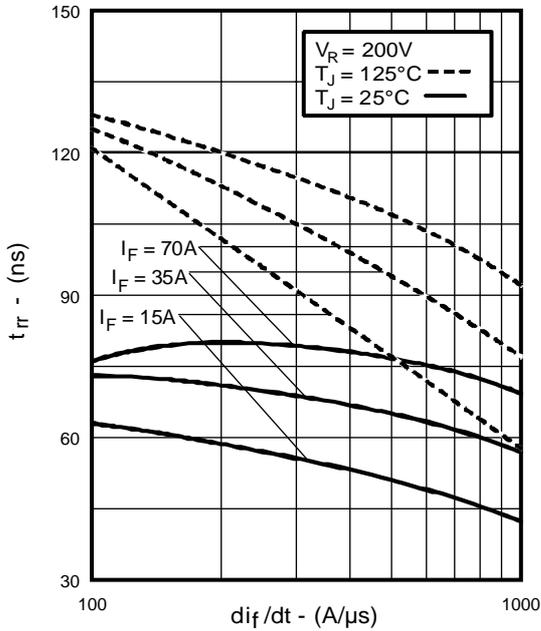


**Fig. 5 - Typical Reverse Recovery vs.  $di_f/dt$ , (per Leg)**

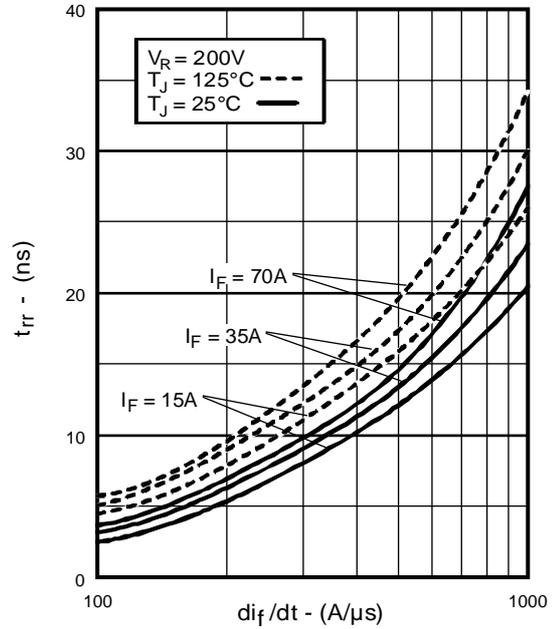


**Fig. 6 - Typical Recovery Current vs.  $di_f/dt$ , (per Leg)**

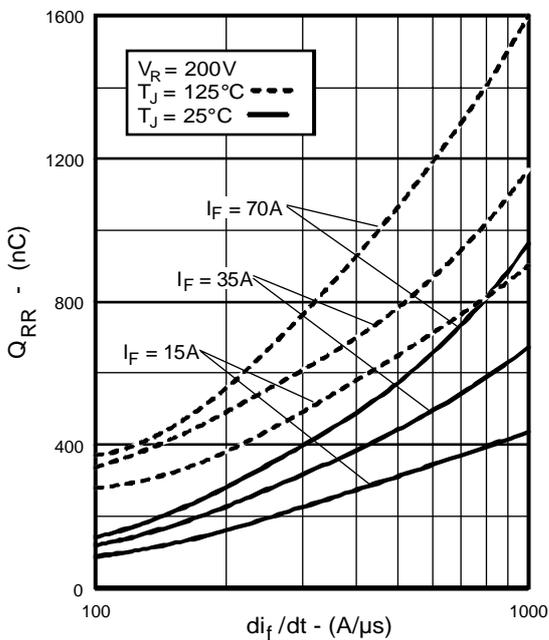


**Fig. 7 - Typical Stored Charge vs.  $di_f/dt$ , (per Leg)**

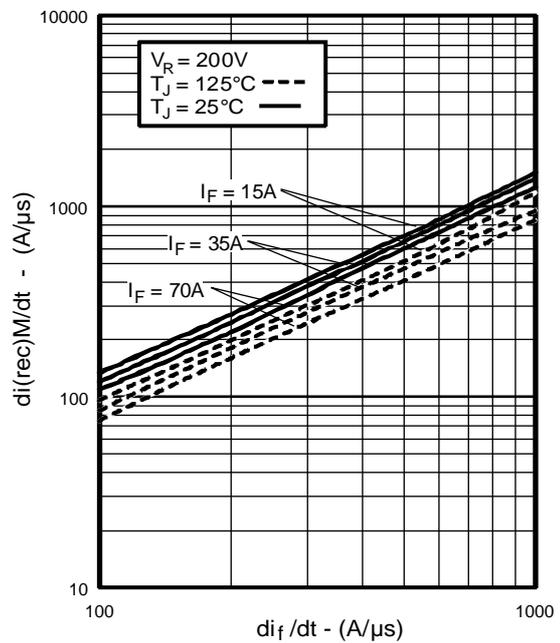



**Fig. 8 - Typical  $di_{(rec)M}/dt$  vs.  $di_f/dt$ , (per Leg)**

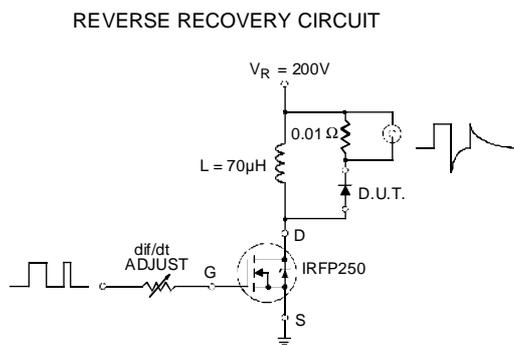

**Fig. 9 - Reverse Recovery Parameter Test Circuit**

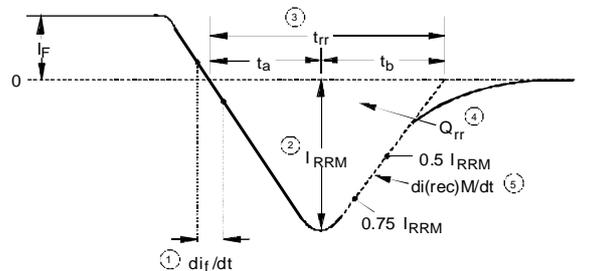

**Fig. 10 - Reverse Recovery Waveform and Definitions**

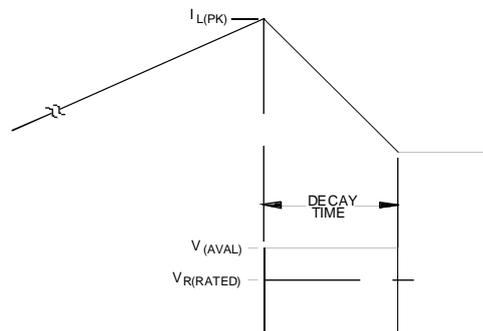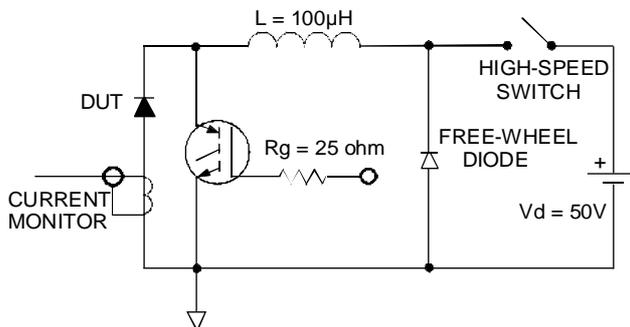

**Fig. 11 - Avalanche Test Circuit and Waveforms**