



Standard TO-220 Leadform Options


International Rectifier now offers standard leadform in various configurations to allow the flexibility to meet the variety of design requirements. Shown below are IR's standard leadform offerings. To order a device with leadforming, simply state the desired TO-220 HEXFET Part Number then indicate the leadform of your choice with the three digit suffix. For the correct suffix refer to the leadform options which are shown below. Example: IRF530-004 is an IRF530 HEXFET with an option -004 leadform.

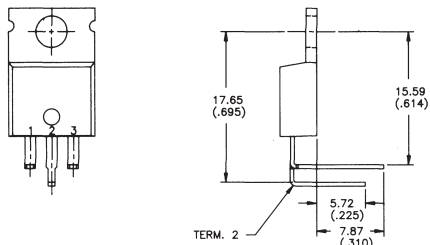


OPTION - 002

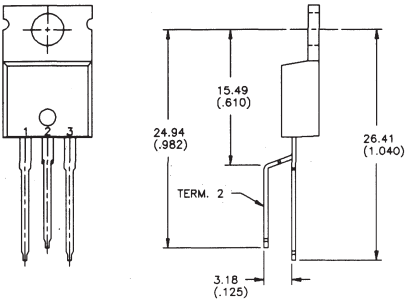


OPTION - 003

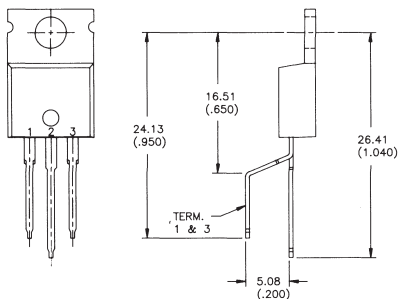


OPTION - 004

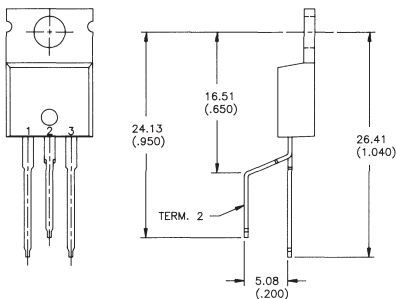

OPTION - 005

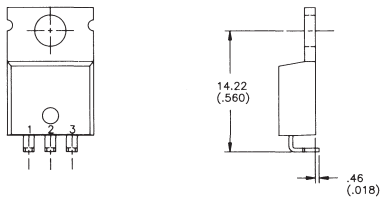

OPTION - 006

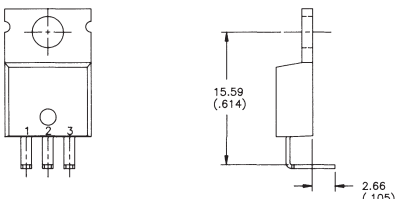


OPTION - 009

TERM 1 - GATE
TERM 2 - DRAIN
TERM 3 - SOURCE


All dimensions in millimeters (inches)

Dimensions in Millimeters and (Inches)


Standard TO-220 Leadform Options, cont.




OPTION - 010




OPTION - 011

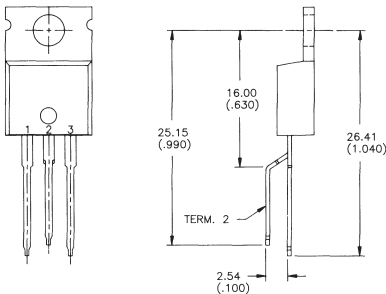


OPTION - 012

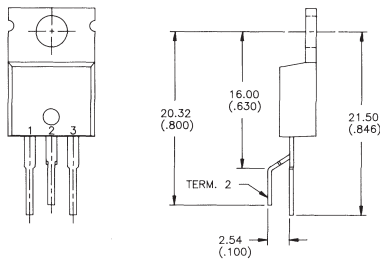

OPTION - 013



OPTION - 015




OPTION - 017


TERM 1 - GATE
TERM 2 - DRAIN
TERM 3 - SOURCE

Dimensions in Millimeters and (Inches)


Standard TO-220 Leadform Options, cont.

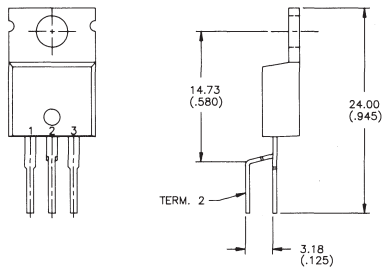


OPTION - 018

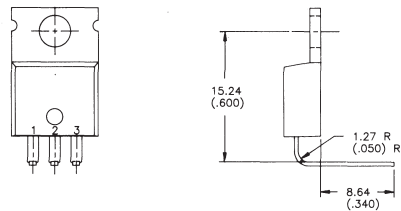


OPTION - 019

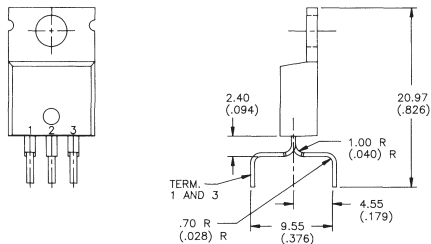


OPTION - 024

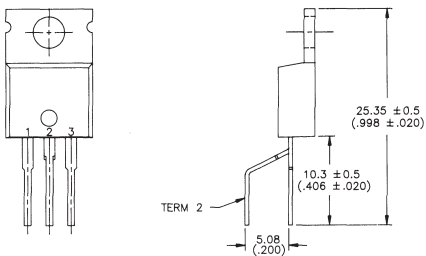

OPTION - 029

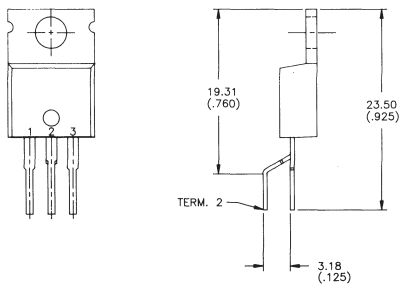

OPTION - 030

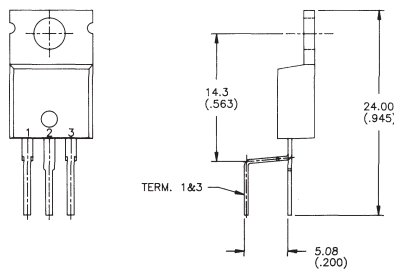

OPTION - 031

TERM 1 - GATE
TERM 2 - DRAIN
TERM 3 - SOURCE

Dimensions in Millimeters and (Inches)