

International IR Rectifier

PD-2.330 rev. A 12/97

SD241

SCHOTTKY RECTIFIER

60 Amp


Major Ratings and Characteristics

Characteristics	SD241	Units
$I_{F(AV)}$ Rectangular waveform	60	A
V_{RRM}	35/45	V
I_{FSM} @ 60Hz	400	A
V_F @ 30Apk, $T_J=25^\circ C$ (perleg)	0.82	V
T_J	-55 to 175	°C

Description/Features

The SD241 center tap Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to $175^\circ C$ junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- $175^\circ C T_J$ operation
- Center tap TO-3 package
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Hermetic packaging

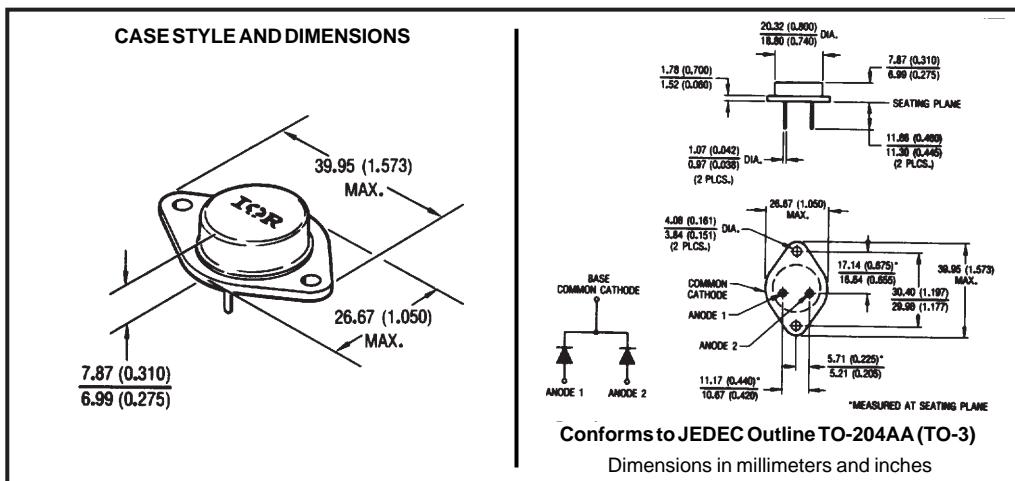

Voltage Ratings

Part number	SD241		
V_R Max. DC Reverse Voltage (V)			
V_{RWM} Max. Working Peak Reverse Voltage (V)		35/45	(1)

(1) For SD241 rated V_{RWM} and $V_{RRM} = 45V$ @ $T_J = 25^\circ C$, = 35V @ $T_J = 150^\circ C$ **Absolute Maximum Ratings**

Parameters	SD241	Units	Conditions
$I_{F(AV)}$ Max.AverageForwardCurrent * See Fig. 5	60	A	50% duty cycle @ $T_C = 120^\circ C$, rectangular waveform
I_{FSM} Max.PeakOneCycleNon-Repetitive Surge Current (Per Leg) * See Fig. 7	400	A	60Hz half cycle sine wave or 5ms rectangular pulse Following any rated load condition and with rated V_{RRM} applied

Electrical Specifications

Parameters	SD241	Units	Conditions		
V_{FM} Max. Forward Voltage Drop (Per Leg) * See Fig. 1 (2)	0.82	V	@ 30A	$T_J = 25^\circ C$	
	1.09	V	@ 60A		
	0.92	V	@ 60A		
I_{RM} Max. Reverse Leakage Current (Per Leg) * See Fig. 2 (2)	10	mA	$T_J = 25^\circ C$	$V_R = \text{rated } V_R$	
	20	mA	$T_J = 125^\circ C$		
C_T Max. Junction Capacitance (Per Leg)	1400	pF	$V_R = 5V_{DC}$, (test signal range 100Khz to 1Mhz) $25^\circ C$		
L_S Typical Series Inductance (Per Leg)	10.0	nH	Measured mounting plane to lead 5mm from package body		
dv/dt Max. Voltage Rate of Change (Rated V_R)	1000	V/ μs			

(2) Pulse Width < 300 μs , Duty Cycle <2%**Thermal-Mechanical Specifications**

Parameters	SD241	Units	Conditions	
T_J Max.Junction Temperature Range	-55to175	°C		
T_{stg} Max.Storage Temperature Range	-55to175	°C		
R_{thJC} Max.Thermal Resistance Junction to Case (Per Leg)	1.40	°C/W	DC operation	* See Fig. 4
R_{thJC} Max.Thermal Resistance Junction to Case (Per Package)	0.70	°C/W	DC operation	
R_{thCS} Typical Thermal Resistance, Case to Heatsink	0.20	°C/W	Mounting surface, smooth and greased	
wt Approximate Weight	11.4(0.40)	g(oz.)		
T Mounting Torque	Min.	12(10)	Kg-cm	
	Max.	17(15)	(lbf-in)	
Case Style	TO-204AA(TO-3)		JEDEC	

* For Additional Informations and Graphs, Please See the 40CDQ Series

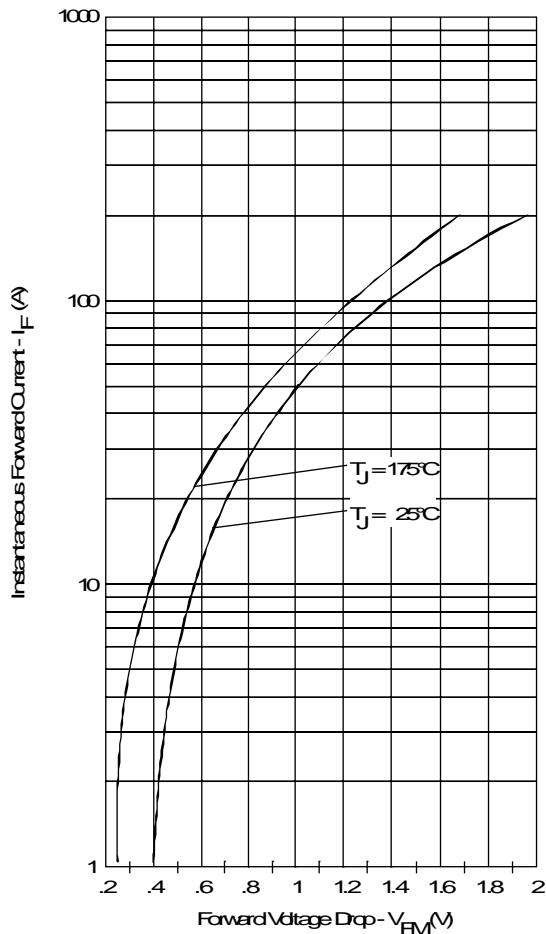


Fig. 1-Max. Forward Voltage Drop Characteristics
(PerLeg)

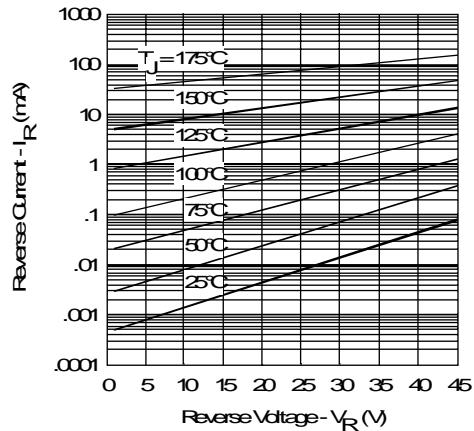


Fig. 2-Typical Values Of Reverse Current
Vs. Reverse Voltage (PerLeg)

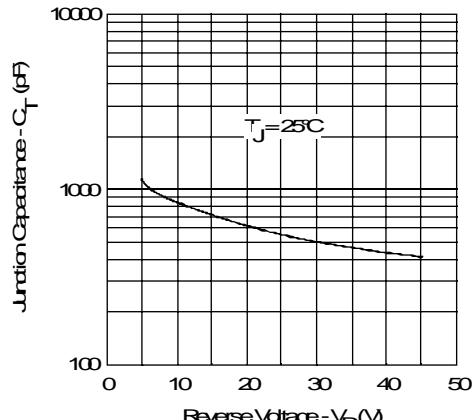


Fig. 3-Typical Junction Capacitance
Vs. Reverse Voltage (PerLeg)

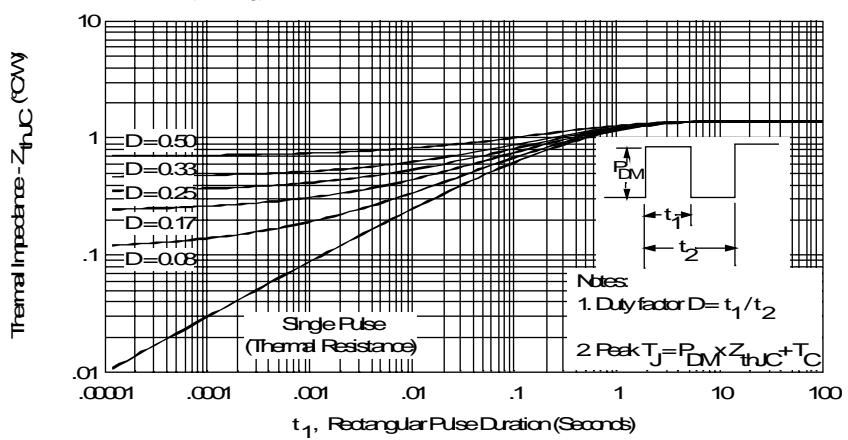


Fig. 4-Max. Thermal Impedance Z_{thJC} Characteristics (PerLeg)

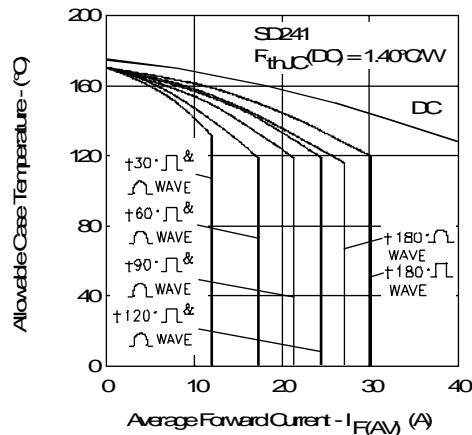


Fig.5-Max. Allowable Case Temperature
Vs. Average Forward Current (PerLeg)

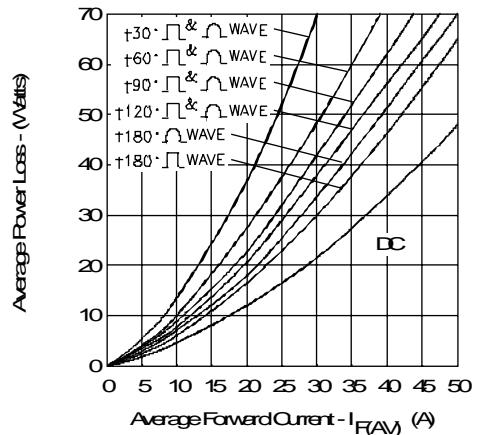


Fig.6-Forward Power Loss Characteristics
(PerLeg)

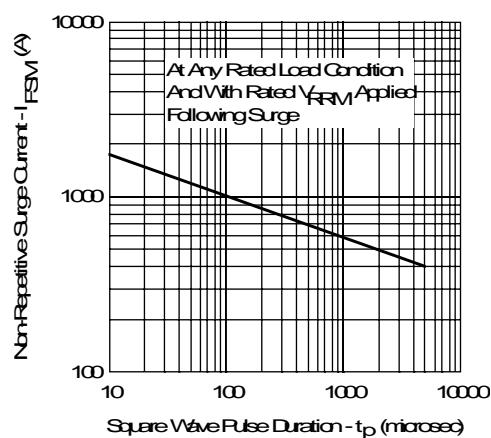


Fig.7 - Max. Non-Repetitive Surge Current (Per Leg)