



3.3V CMOS 16-BIT BUS TRANSCEIVER WITH 3-STATE OUTPUTS AND 5 VOLT TOLERANT I/O

IDT74LVC162245A

FEATURES:

- Typical $t_{SK(0)}$ (Output Skew) < 250ps
- ESD > 2000V per MIL-STD-883, Method 3015;
> 200V using machine model (C = 200pF, R = 0)
- 0.635mm pitch SSOP, 0.50mm pitch TSSOP
and 0.40mm pitch TVSOP packages
- Extended commercial range of -40°C to +85°C
- $V_{CC} = 3.3V \pm 0.3V$, Normal Range
- $V_{CC} = 2.7V$ to 3.6V, Extended Range
- CMOS power levels (0.4μW typ. static)
- All inputs, outputs and I/O are 5 Volt tolerant
- Supports hot insertion

Drive Features for LVC162245A:

- Balanced Output Drivers: ± 12 mA (A port)
- High Output Drivers: ± 24 mA (B port)

APPLICATIONS:

- 5V and 3.3V mixed voltage systems
- Data communication and telecommunication systems



DESCRIPTION:

This 16-bit transceiver is built using advanced dual metal CMOS technology. The LVC162245A is designed for asynchronous communication between data buses. The control-function implementation minimizes external timing requirements. This device can be used as two 8-bit transceivers or one 16-bit transceiver. It allows data transmission from the A bus to the B bus or from the B bus to the A bus, depending on the logic level at the direction-control (DIR) input. The output-enable (\overline{OE}) input can be used to disable the device so that the buses are effectively isolated. To ensure the high-impedance state during power up or power down, \overline{OE} should be tied to V_{CC} through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

All pins can be driven from either 3.3V or 5V devices. This feature allows the use of this device as a translator in a mixed 3.3V/5V supply system.

The LVC162245A has series resistors in the device output structure of the "A" port which will significantly reduce line noise when used with light loads. The driver has been designed to drive ± 12 mA at the designated threshold levels. The "B" port has a ± 24 mA driver.


FUNCTIONAL BLOCK DIAGRAM

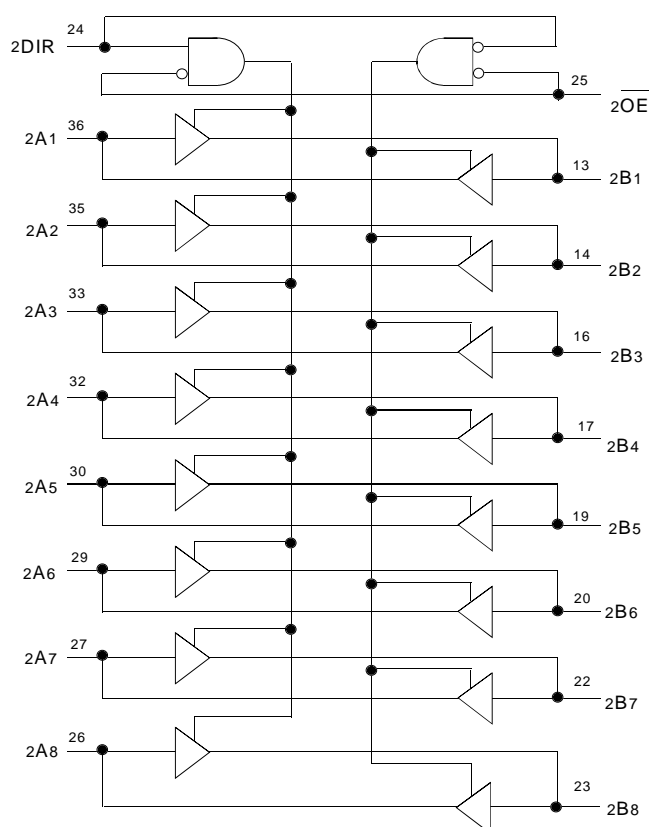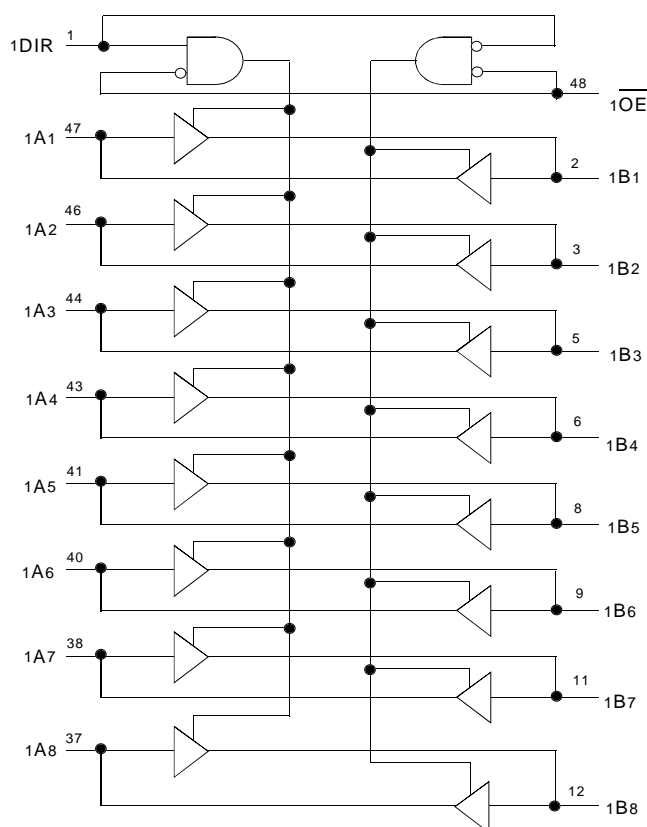

EXTENDED COMMERCIAL TEMPERATURE RANGE

AUGUST 1999

PIN CONFIGURATION

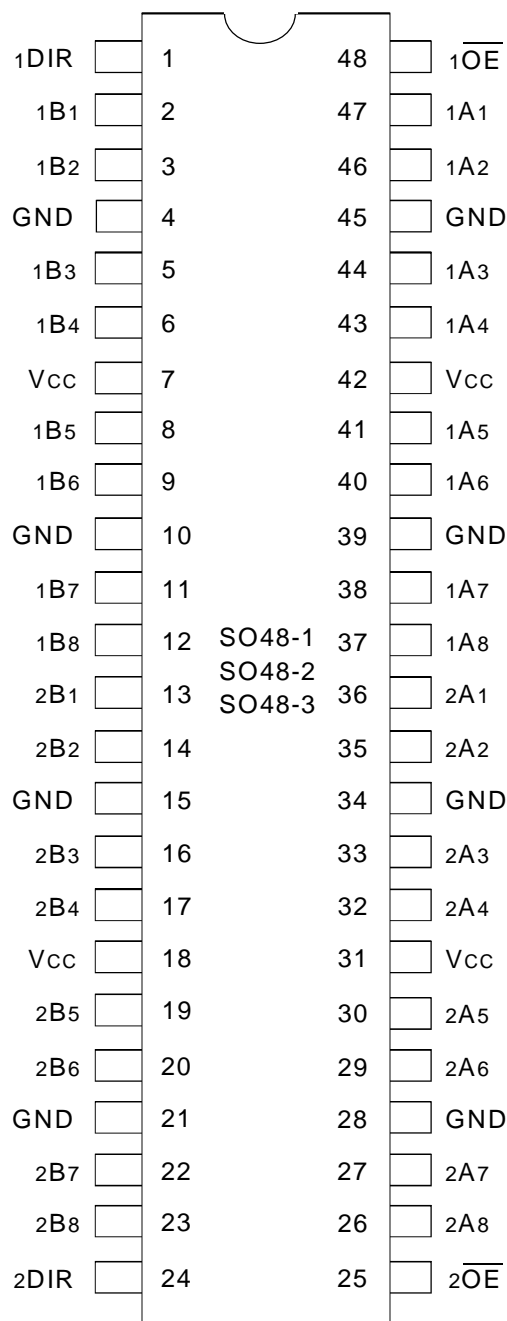

SSOP/ TSSOP/ TVSOP
TOP VIEW

ABSOLUTE MAXIMUM RATINGS (1)

| Symbol | Description | Max. | Unit |
|------------------------------------|-----------------------------------------------------------------------|---------------|------|
| V _{TERM} (2) | Terminal Voltage with Respect to GND | – 0.5 to +6.5 | V |
| V _{TERM} (3) | Terminal Voltage with Respect to GND | – 0.5 to +6.5 | V |
| T _{STG} | Storage Temperature | – 65 to +150 | °C |
| I _{OUT} | DC Output Current | – 50 to +50 | mA |
| I _{IK} I _{OK} | Continuous Clamp Current, V _I < 0 or V _O < 0 | – 50 | mA |
| I _{CC} I _{SS} | Continuous Current through each V _{CC} or GND | ± 100 | mA |

LVC Link

NOTES:

- Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
- V_{CC} terminals.
- All terminals except V_{CC}.

CAPACITANCE (T_A = +25°C, f = 1.0MHz)

| Symbol | Parameter(1) | Conditions | Typ. | Max. | Unit |
|------------------|----------------------|-----------------------|------|------|------|
| C _{IN} | Input Capacitance | V _{IN} = 0V | 4.5 | 6 | pF |
| C _{OUT} | Output Capacitance | V _{OUT} = 0V | 6.5 | 8 | pF |
| C _{I/O} | I/O Port Capacitance | V _{IN} = 0V | 6.5 | 8 | pF |

LVC Link

NOTE:

- As applicable to the device type.

PIN DESCRIPTION

| Pin Names | Description |
|-----------------|----------------------------------|
| x _{OE} | Output Enable Input (Active LOW) |
| xDIR | Direction Control Input |
| xAx | Side A Inputs or 3-State Outputs |
| xBx | Side B Inputs or 3-State Outputs |

FUNCTION TABLE (each 8-bit section) (1)

| Inputs | | Outputs |
|-----------------|------|-----------------|
| x _{OE} | xDIR | |
| L | L | B Data to A Bus |
| L | H | A Data to B Bus |
| H | X | Isolation |

NOTE:

- H = HIGH Voltage Level
L = LOW Voltage Level
X = Don't Care

DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

Following Conditions Apply Unless Otherwise Specified:

Operating Condition: $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$

| Symbol | Parameter | Test Conditions | | Min. | Typ. ⁽¹⁾ | Max. | Unit |
|-------------------------------------|--------------------------------------------------------|------------------------------------------------------------------------|------------------------------------------|------|---------------------|----------|---------------|
| V_{IH} | Input HIGH Voltage Level | $V_{CC} = 2.3\text{V}$ to 2.7V | | 1.7 | — | — | V |
| | | $V_{CC} = 2.7\text{V}$ to 3.6V | | 2 | — | — | |
| V_{IL} | Input LOW Voltage Level | $V_{CC} = 2.3\text{V}$ to 2.7V | | — | — | 0.7 | V |
| | | $V_{CC} = 2.7\text{V}$ to 3.6V | | — | — | 0.8 | |
| I_{IH} I_{IL} | Input Leakage Current | $V_{CC} = 3.6\text{V}$ | $V_I = 0$ to 5.5V | — | — | ± 5 | μA |
| I_{OZH} I_{OZL} | High Impedance Output Current (3-State Output pins) | $V_{CC} = 3.6\text{V}$ | $V_O = 0$ to 5.5V | — | — | ± 10 | μA |
| I_{OFF} | Input/Output Power Off Leakage | $V_{CC} = 0\text{V}$, V_{IN} or $V_O \leq 5.5\text{V}$ | | — | — | ± 50 | μA |
| V_{IK} | Clamp Diode Voltage | $V_{CC} = 2.3\text{V}$, $I_{IN} = -18\text{mA}$ | | — | -0.7 | -1.2 | V |
| V_H | Input Hysteresis | $V_{CC} = 3.3\text{V}$ | | — | 100 | — | mV |
| I_{CCL} I_{CCH} I_{CCZ} | Quiescent Power Supply Current | $V_{CC} = 3.6\text{V}$ | $V_{IN} = \text{GND}$ or V_{CC} | — | — | 10 | μA |
| | | | $3.6 \leq V_{IN} \leq 5.5\text{V}^{(2)}$ | — | — | 10 | |
| ΔI_{CC} | Quiescent Power Supply Current Variation | One input at $V_{CC} - 0.6\text{V}$ other inputs at V_{CC} or GND | | — | — | 500 | μA |

LVC Link

NOTES:

- Typical values are at $V_{CC} = 3.3\text{V}$, $+25^{\circ}\text{C}$ ambient.
- This applies in the disabled state only.

OUTPUT DRIVE CHARACTERISTICS (A PORT)

| Symbol | Parameter | Test Conditions ⁽¹⁾ | | Min. | Max. | Unit |
|----------|---------------------|-----------------------------------------|--------------------------|----------------|------|------|
| V_{OH} | Output HIGH Voltage | $V_{CC} = 2.3\text{V}$ to 3.6V | $I_{OH} = -0.1\text{mA}$ | $V_{CC} - 0.2$ | — | V |
| | | $V_{CC} = 2.3\text{V}$ | $I_{OH} = -4\text{mA}$ | 1.9 | — | |
| | | | $I_{OH} = -6\text{mA}$ | 1.7 | — | |
| | | $V_{CC} = 2.7\text{V}$ | $I_{OH} = -4\text{mA}$ | 2.2 | — | |
| | | | $I_{OH} = -8\text{mA}$ | 2 | — | |
| | | $V_{CC} = 3.0\text{V}$ | $I_{OH} = -6\text{mA}$ | 2.4 | — | |
| | | | $I_{OH} = -12\text{mA}$ | 2 | — | |
| V_{OL} | Output LOW Voltage | $V_{CC} = 2.3\text{V}$ to 3.6V | $I_{OL} = 0.1\text{mA}$ | — | 0.2 | V |
| | | $V_{CC} = 2.3\text{V}$ | $I_{OL} = 4\text{mA}$ | — | 0.4 | |
| | | | $I_{OL} = 6\text{mA}$ | — | 0.55 | |
| | | $V_{CC} = 2.7\text{V}$ | $I_{OL} = 4\text{mA}$ | — | 0.4 | |
| | | | $I_{OL} = 8\text{mA}$ | — | 0.6 | |
| | | $V_{CC} = 3.0\text{V}$ | $I_{OL} = 6\text{mA}$ | — | 0.55 | |
| | | | $I_{OL} = 12\text{mA}$ | — | 0.8 | |

LVC Link

NOTE:

- V_{IH} and V_{IL} must be within the min. or max. range shown in the DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE table for the appropriate V_{CC} range. $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$.

OUTPUT DRIVE CHARACTERISTICS (B PORT)

| Symbol | Parameter | Test Conditions ⁽¹⁾ | | Min. | Max. | Unit |
|--------|---------------------|--------------------------------|---------------------------|-----------------------|------|------|
| VOH | Output HIGH Voltage | V _{CC} = 2.3V to 3.6V | I _{OH} = – 0.1mA | V _{CC} – 0.2 | — | V |
| | | V _{CC} = 2.3V | I _{OH} = – 6mA | 2 | — | |
| | | V _{CC} = 2.3V | I _{OH} = – 12mA | 1.7 | — | |
| | | V _{CC} = 2.7V | | 2.2 | — | |
| | | V _{CC} = 3.0V | | 2.4 | — | |
| | | V _{CC} = 3.0V | I _{OH} = – 24mA | 2.2 | — | |
| VOL | Output LOW Voltage | V _{CC} = 2.3V to 3.6V | I _{OL} = 0.1mA | — | 0.2 | V |
| | | V _{CC} = 2.3V | I _{OL} = 6mA | — | 0.4 | |
| | | | I _{OL} = 12mA | — | 0.7 | |
| | | V _{CC} = 2.7V | I _{OL} = 12mA | — | 0.4 | |
| | | V _{CC} = 3.0V | I _{OL} = 24mA | — | 0.55 | |

LVC Link

NOTE:

1. V_{IH} and V_{IL} must be within the min. or max. range shown in the DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE table for the appropriate V_{CC} range. T_A = – 40°C to +85°C.

OPERATING CHARACTERISTICS, V_{CC} = 3.3V ± 0.3V, T_A = 25°C

| Symbol | Parameter | Test Conditions | Typical | Unit |
|--------|----------------------------------------------------------------|---------------------------------|---------|------|
| CPD | Power Dissipation Capacitance per transceiver Outputs enabled | C _L = 0pF, f = 10Mhz | | pF |
| CPD | Power Dissipation Capacitance per transceiver Outputs disabled | | | pF |

SWITCHING CHARACTERISTICS (A PORT) ⁽¹⁾

| Symbol | Parameter | V _{CC} = 2.7V | | V _{CC} = 3.3V ± 0.3V | | Unit |
|--------------------------------------|-----------------------------------|------------------------|------|-------------------------------|------|------|
| | | Min. | Max. | Min. | Max. | |
| t _{PLH} t _{PHL} | Propagation Delay xBx to xAx | 1.5 | 5.7 | 1.5 | 4.8 | ns |
| t _{PZH} t _{PZL} | Output Enable Time xOE to xAx | 1.5 | 7.9 | 1.5 | 6.3 | ns |
| t _{PHZ} t _{PLZ} | Output Disable Time xOE to xAx | 1.5 | 8.3 | 2.2 | 7.4 | ns |
| t _{SK(o)} | Output Skew ⁽²⁾ | — | — | — | 500 | ps |

SWITCHING CHARACTERISTICS (B PORT) ⁽¹⁾

| Symbol | Parameter | V _{CC} = 2.7V | | V _{CC} = 3.3V ± 0.3V | | Unit |
|--------------------------------------|-----------------------------------|------------------------|------|-------------------------------|------|------|
| | | Min. | Max. | Min. | Max. | |
| t _{PLH} t _{PHL} | Propagation Delay xAx to xBx | 1.5 | 4.7 | 1 | 4 | ns |
| t _{PZH} t _{PZL} | Output Enable Time xOE to xBx | 1.5 | 6.7 | 1.5 | 5.5 | ns |
| t _{PHZ} t _{PLZ} | Output Disable Time xOE to xBx | 1.5 | 7.1 | 1.5 | 6.6 | ns |
| t _{SK(o)} | Output Skew ⁽²⁾ | — | — | — | 500 | ps |

NOTES:

1. See test circuits and waveforms. T_A = – 40°C to + 85°C.
2. Skew between any two outputs of the same package and switching in the same direction.


TEST CIRCUITS AND WAVEFORMS:

TEST CONDITIONS

| Symbol | $V_{CC}^{(1)} = 3.3V \pm 0.3V$ | $V_{CC}^{(1)} = 2.7V$ | $V_{CC}^{(2)} = 2.5V \pm 0.2V$ | Unit |
|------------|--------------------------------|-----------------------|--------------------------------|------|
| V_{LOAD} | 6 | 6 | $2 \times V_{CC}$ | V |
| V_{IH} | 2.7 | 2.7 | V_{CC} | V |
| V_T | 1.5 | 1.5 | $V_{CC} / 2$ | V |
| V_{LZ} | 300 | 300 | 150 | mV |
| V_{HZ} | 300 | 300 | 150 | mV |
| C_L | 50 | 50 | 30 | pF |

LVC Link

TEST CIRCUITS FOR ALL OUTPUTS

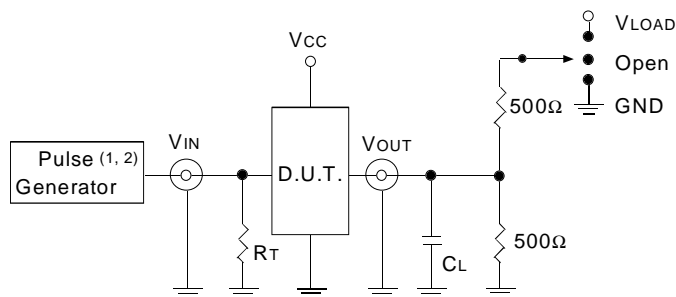

LVC Link

DEFINITIONS:

C_L = Load capacitance: includes jig and probe capacitance.
 R_T = Termination resistance: should be equal to Z_{OUT} of the Pulse Generator.

NOTES:


1. Pulse Generator for All Pulses: Rate $\leq 10\text{MHz}$; $t_F \leq 2.5\text{ns}$; $t_R \leq 2.5\text{ns}$.
2. Pulse Generator for All Pulses: Rate $\leq 10\text{MHz}$; $t_F \leq 2\text{ns}$; $t_R \leq 2\text{ns}$.

SWITCH POSITION

| Test | Switch |
|-----------------------------------------|------------|
| Open Drain Disable Low Enable Low | V_{LOAD} |
| Disable High Enable High | GND |
| All Other tests | Open |

LVC Link

OUTPUT SKEW - $t_{SK}(x)$

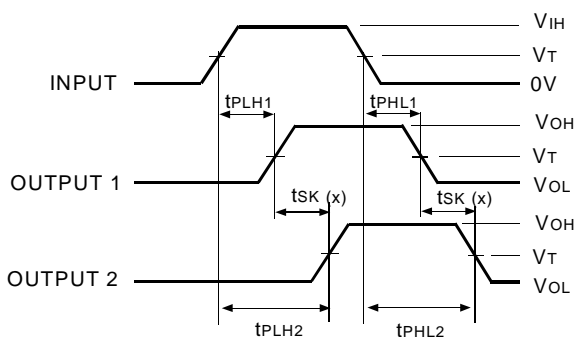


$$t_{SK}(x) = |t_{PLH2} - t_{PLH1}| \text{ or } |t_{PHL2} - t_{PHL1}|$$

LVC Link

NOTES:


1. For $t_{SK}(o)$ OUTPUT1 and OUTPUT2 are any two outputs.
2. For $t_{SK}(b)$ OUTPUT1 and OUTPUT2 are in the same bank.

PROPAGATION DELAY

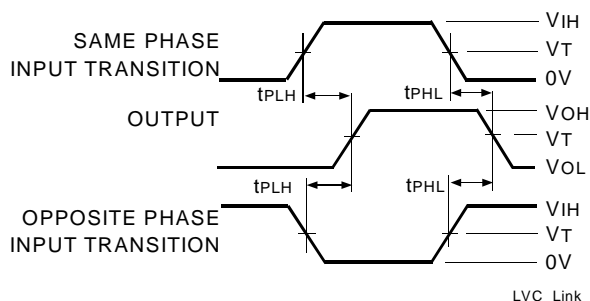

LVC Link

ENABLE AND DISABLE TIMES

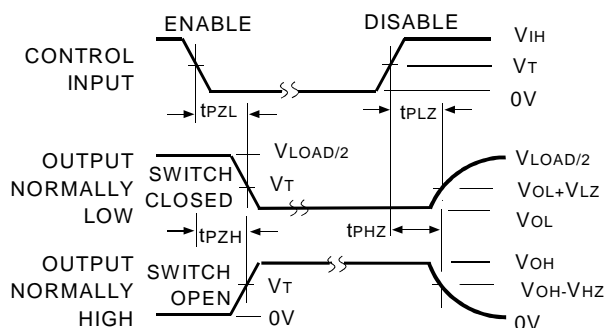


LVC Link

NOTE:


1. Diagram shown for input Control Enable-LOW and input Control Disable-HIGH.

SET-UP, HOLD, AND RELEASE TIMES

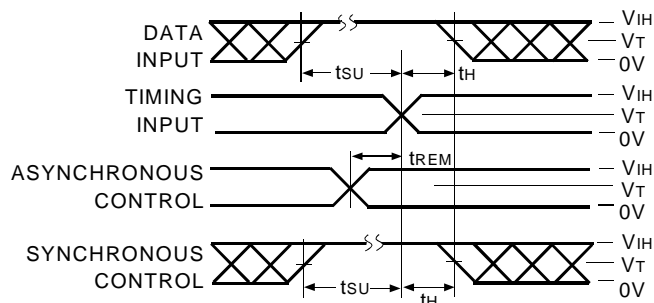

LVC Link

PULSE WIDTH

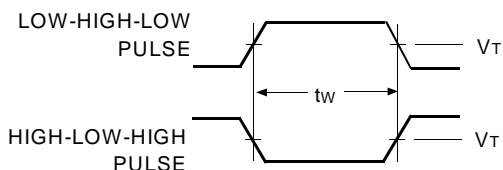

LVC Link

ORDERING INFORMATION

| IDT | XX | LVC | X | XX | XXXX | XX | |
|-----|-------------|-----|----------|--------|-------------|---------|-------------------------------------------------------------------------------------------------|
| | Temp. Range | | Bus-Hold | Family | Device Type | Package | |
| | | | | | | PV | Shrink Small Outline Package (SO48-1) |
| | | | | | | PA | Thin Shrink Small Outline Package (SO48-2) |
| | | | | | | PF | Thin Very Small Outline Package (SO48-3) |
| | | | | | 245A | | 16-Bit Bus Transceiver |
| | | | | 162 | | | Double-Density 3.3Volt with Resistors, $\pm 12\text{mA}$ (A Port) $\pm 24\text{mA}$ (B Port) |
| | | | | Blank | | | No Bus-hold |
| | | | | 74 | | | -40°C to $+85^{\circ}\text{C}$ |



CORPORATE HEADQUARTERS
 2975 Stender Way
 Santa Clara, CA 95054

for SALES:
 800-345-7015 or 408-727-6116
 fax: 408-492-8674
www.idt.com*

*To search for sales office near you, please click the sales button found on our home page or dial the 800# above and press 2.
 The IDT logo is a registered trademark of Integrated Device Technology, Inc.