



# 3.3V CMOS 20-BIT BUFFER WITH 5 VOLT TOLERANT I/O

IDT74LVC162827A

## FEATURES:

- Typical  $t_{SK(0)}$  (Output Skew) < 250ps
- ESD > 2000V per MIL-STD-883, Method 3015; > 200V using machine model (C = 200pF, R = 0)
- 0.635mm pitch SSOP, 0.50mm pitch TSSOP and 0.40mm pitch TVSOP packages
- Extended commercial range of -40°C to +85°C
- $V_{CC} = 3.3V \pm 0.3V$ , Normal Range
- $V_{CC} = 2.7V$  to 3.6V, Extended Range
- CMOS power levels (0.4μW typ. static)
- All inputs, outputs and I/O are 5 Volt tolerant
- Supports hot insertion

### Drive Features for LVC162827A:

- High Output Drivers:  $\pm 12mA$
- Reduced system switching noise

## APPLICATIONS:

- 5V and 3.3V mixed voltage systems
- Data communication and telecommunication systems

## DESCRIPTION:



The LVC162827A 20-bit buffer is built using advanced dual metal CMOS technology. The 20-bit bus driver provides high-performance bus interface buffering for wide data/address paths or busses carrying parity. Two pair of NAND-ed output enable controls offer maximum control flexibility and are organized to operate the device as two 10-bit buffers or one 20-bit buffer. Flow-through organization of signal pins simplifies layout. All inputs are designed with hysteresis for improved noise margin.

The LVC162827A buffer is ideally suited for driving high capacitance loads and low impedance backplanes. The output buffers are designed with power off disable capability to allow "live insertion" of boards when used as backplane drivers.


All pins can be driven from either 3.3V or 5V devices. This feature allows the use of this device as a translator in a mixed 3.3V/5V supply system.

The LVC162827A has been designed with a  $\pm 12mA$  output driver. This driver is capable of driving a moderate to heavy load while maintaining speed performance.

## FUNCTIONAL BLOCK DIAGRAM

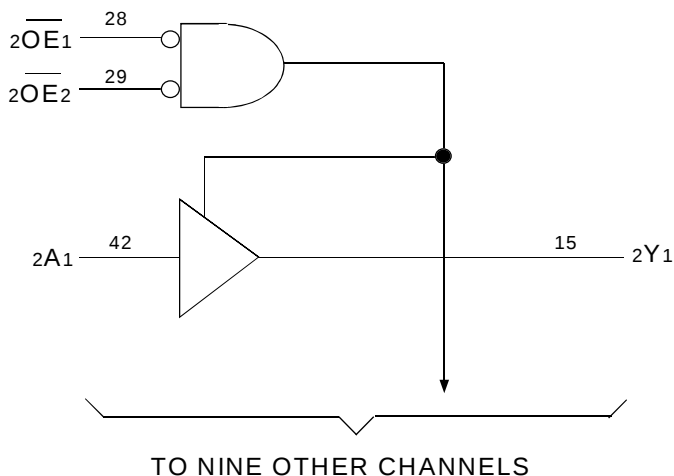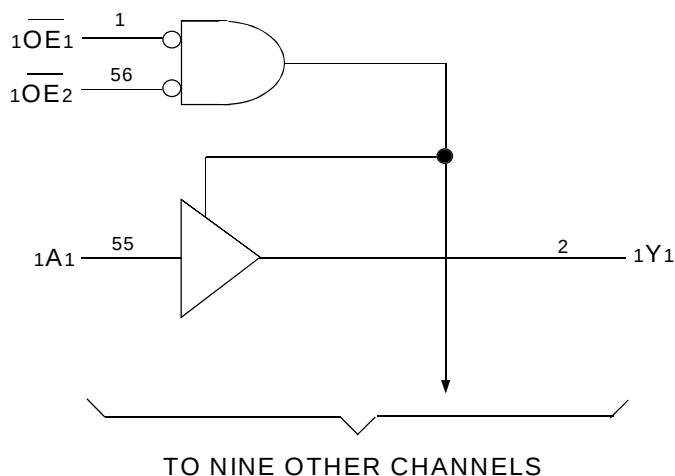

## PIN CONFIGURATION

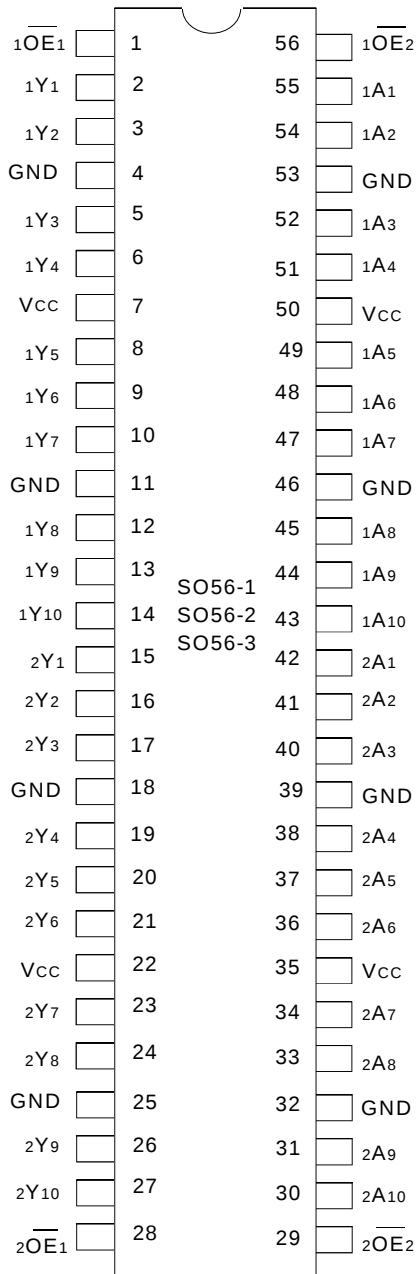

SSOP/ TSSOP/ TVSOP  
TOP VIEW

## ABSOLUTE MAXIMUM RATINGS (1)

| Symbol               | Description                                   | Max.          | Unit |
|----------------------|-----------------------------------------------|---------------|------|
| VTERM <sup>(2)</sup> | Terminal Voltage with Respect to GND          | – 0.5 to +6.5 | V    |
| VTERM <sup>(3)</sup> | Terminal Voltage with Respect to GND          | – 0.5 to +6.5 | V    |
| TSTG                 | Storage Temperature                           | – 65 to +150  | °C   |
| IOUT                 | DC Output Current                             | – 50 to +50   | mA   |
| IIK<br>IOK           | Continuous Clamp Current,<br>Vi < 0 or Vo < 0 | – 50          | mA   |
| ICC<br>ISS           | Continuous Current through<br>each Vcc or GND | ±100          | mA   |

LVC Link

### NOTES:

- Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
- Vcc terminals.
- All terminals except Vcc.

## CAPACITANCE (TA = +25°C, f = 1.0MHz)

| Symbol | Parameter <sup>(1)</sup> | Conditions | Typ. | Max. | Unit |
|--------|--------------------------|------------|------|------|------|
| CIN    | Input Capacitance        | VIN = 0V   | 4.5  | 6    | pF   |
| COUT   | Output Capacitance       | VOUT = 0V  | 6.5  | 8    | pF   |
| CIO    | I/O Port Capacitance     | VIN = 0V   | 6.5  | 8    | pF   |

LVC Link

### NOTE:

- As applicable to the device type.

## PIN DESCRIPTION

| Pin Names | Description                       |
|-----------|-----------------------------------|
| xOEx      | Output Enable Inputs (Active LOW) |
| xAx       | Data Inputs                       |
| XYx       | 3-State Outputs                   |

## FUNCTION TABLE<sup>(1)</sup>

| Inputs |      |     | Outputs |
|--------|------|-----|---------|
| xOE1   | xOE2 | xAx | XYx     |
| L      | L    | L   | L       |
| L      | L    | H   | H       |
| H      | X    | X   | Z       |
| X      | H    | X   | Z       |

### NOTE:

- H = HIGH Voltage Level  
L = LOW Voltage Level  
X = Don't Care  
Z = High-Impedance

## DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

Following Conditions Apply Unless Otherwise Specified:

Operating Condition:  $T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$

| Symbol                              | Parameter                                              | Test Conditions                                                        |                                          | Min. | Typ. <sup>(1)</sup> | Max.     | Unit          |
|-------------------------------------|--------------------------------------------------------|------------------------------------------------------------------------|------------------------------------------|------|---------------------|----------|---------------|
| $V_{IH}$                            | Input HIGH Voltage Level                               | $V_{CC} = 2.3\text{V}$ to $2.7\text{V}$                                |                                          | 1.7  | —                   | —        | V             |
|                                     |                                                        | $V_{CC} = 2.7\text{V}$ to $3.6\text{V}$                                |                                          | 2    | —                   | —        |               |
| $V_{IL}$                            | Input LOW Voltage Level                                | $V_{CC} = 2.3\text{V}$ to $2.7\text{V}$                                |                                          | —    | —                   | 0.7      | V             |
|                                     |                                                        | $V_{CC} = 2.7\text{V}$ to $3.6\text{V}$                                |                                          | —    | —                   | 0.8      |               |
| $I_{IH}$<br>$I_{IL}$                | Input Leakage Current                                  | $V_{CC} = 3.6\text{V}$                                                 | $V_I = 0$ to $5.5\text{V}$               | —    | —                   | $\pm 5$  | $\mu\text{A}$ |
| $I_{OZH}$<br>$I_{OZL}$              | High Impedance Output Current<br>(3-State Output pins) | $V_{CC} = 3.6\text{V}$                                                 | $V_O = 0$ to $5.5\text{V}$               | —    | —                   | $\pm 10$ | $\mu\text{A}$ |
| $I_{OFF}$                           | Input/Output Power Off Leakage                         | $V_{CC} = 0\text{V}$ , $V_{IN}$ or $V_O \leq 5.5\text{V}$              |                                          | —    | —                   | $\pm 50$ | $\mu\text{A}$ |
| $V_{IK}$                            | Clamp Diode Voltage                                    | $V_{CC} = 2.3\text{V}$ , $I_{IN} = -18\text{mA}$                       |                                          | —    | -0.7                | -1.2     | V             |
| $V_H$                               | Input Hysteresis                                       | $V_{CC} = 3.3\text{V}$                                                 |                                          | —    | 100                 | —        | mV            |
| $I_{CCL}$<br>$I_{CCH}$<br>$I_{CCZ}$ | Quiescent Power Supply Current                         | $V_{CC} = 3.6\text{V}$                                                 | $V_{IN} = \text{GND}$ or $V_{CC}$        | —    | —                   | 10       | $\mu\text{A}$ |
|                                     |                                                        |                                                                        | $3.6 \leq V_{IN} \leq 5.5\text{V}^{(2)}$ | —    | —                   | 10       |               |
| $\Delta I_{CC}$                     | Quiescent Power Supply Current Variation               | One input at $V_{CC} - 0.6\text{V}$<br>other inputs at $V_{CC}$ or GND |                                          | —    | —                   | 500      | $\mu\text{A}$ |

LVC Link

### NOTES:

- Typical values are at  $V_{CC} = 3.3\text{V}$ ,  $+25^{\circ}\text{C}$  ambient.
- This applies in the disabled state only.

## OUTPUT DRIVE CHARACTERISTICS

| Symbol   | Parameter           | Test Conditions <sup>(1)</sup>          |                          | Min.           | Max. | Unit |
|----------|---------------------|-----------------------------------------|--------------------------|----------------|------|------|
| $V_{OH}$ | Output HIGH Voltage | $V_{CC} = 2.3\text{V}$ to $3.6\text{V}$ | $I_{OH} = -0.1\text{mA}$ | $V_{CC} - 0.2$ | —    | V    |
|          |                     | $V_{CC} = 2.3\text{V}$                  | $I_{OH} = -4\text{mA}$   | 1.9            | —    |      |
|          |                     |                                         | $I_{OH} = -6\text{mA}$   | 1.7            | —    |      |
|          |                     | $V_{CC} = 2.7\text{V}$                  | $I_{OH} = -4\text{mA}$   | 2.2            | —    |      |
|          |                     |                                         | $I_{OH} = -8\text{mA}$   | 2              | —    |      |
|          |                     | $V_{CC} = 3.0\text{V}$                  | $I_{OH} = -6\text{mA}$   | 2.4            | —    |      |
|          |                     |                                         | $I_{OH} = -12\text{mA}$  | 2              | —    |      |
| $V_{OL}$ | Output LOW Voltage  | $V_{CC} = 2.3\text{V}$ to $3.6\text{V}$ | $I_{OL} = 0.1\text{mA}$  | —              | 0.2  | V    |
|          |                     | $V_{CC} = 2.3\text{V}$                  | $I_{OL} = 4\text{mA}$    | —              | 0.4  |      |
|          |                     |                                         | $I_{OL} = 6\text{mA}$    | —              | 0.55 |      |
|          |                     | $V_{CC} = 2.7\text{V}$                  | $I_{OL} = 4\text{mA}$    | —              | 0.4  |      |
|          |                     |                                         | $I_{OL} = 8\text{mA}$    | —              | 0.6  |      |
|          |                     | $V_{CC} = 3.0\text{V}$                  | $I_{OL} = 6\text{mA}$    | —              | 0.55 |      |
|          |                     |                                         | $I_{OL} = 12\text{mA}$   | —              | 0.8  |      |

LVC Link

### NOTE:

- $V_{IH}$  and  $V_{IL}$  must be within the min. or max. range shown in the DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE table for the appropriate  $V_{CC}$  range.  $T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ .

## OPERATING CHARACTERISTICS, $V_{CC} = 3.3V \pm 0.3V$ , $T_A = 25^\circ C$

| Symbol | Parameter                                                        | Test Conditions           | Typical | Unit |
|--------|------------------------------------------------------------------|---------------------------|---------|------|
| CPD    | Power Dissipation Capacitance per buffer/driver Outputs enabled  | $C_L = 0pF$ , $f = 10MHz$ | —       | pF   |
| CPD    | Power Dissipation Capacitance per buffer/driver Outputs disabled |                           | —       | pF   |

## SWITCHING CHARACTERISTICS <sup>(1)</sup>

| Symbol                 | Parameter                          | $V_{CC} = 2.7V$ |      | $V_{CC} = 3.3V \pm 0.3V$ |      | Unit |
|------------------------|------------------------------------|-----------------|------|--------------------------|------|------|
|                        |                                    | Min.            | Max. | Min.                     | Max. |      |
| $t_{PLH}$<br>$t_{PHL}$ | Propagation Delay<br>xAX to xYx    | 1.5             | 8    | 1.5                      | 6.5  | ns   |
| $t_{PZH}$<br>$t_{PZL}$ | Output Enable Time<br>xOEx to xYx  | 1.5             | 11   | 1.5                      | 9.5  | ns   |
| $t_{PHZ}$<br>$t_{PLZ}$ | Output Disable Time<br>xOEx to xYx | 1.5             | 10   | 1.5                      | 8.5  | ns   |
| $t_{sk}(0)$            | Output Skew <sup>(2)</sup>         | —               | —    | —                        | 500  | ps   |

### NOTES:

- See test circuits and waveforms.  $T_A = -40^\circ C$  to  $+85^\circ C$ .
- Skew between any two outputs of the same package and switching in the same direction.


## TEST CIRCUITS AND WAVEFORMS:

### TEST CONDITIONS

| Symbol            | V <sub>CC</sub> (1)= 3.3V ±0.3V | V <sub>CC</sub> (1)= 2.7V | V <sub>CC</sub> (2)= 2.5V ±0.2V | Unit |
|-------------------|---------------------------------|---------------------------|---------------------------------|------|
| V <sub>LOAD</sub> | 6                               | 6                         | 2 x V <sub>CC</sub>             | V    |
| V <sub>IH</sub>   | 2.7                             | 2.7                       | V <sub>CC</sub>                 | V    |
| V <sub>T</sub>    | 1.5                             | 1.5                       | V <sub>CC</sub> / 2             | V    |
| V <sub>LZ</sub>   | 300                             | 300                       | 150                             | mV   |
| V <sub>HZ</sub>   | 300                             | 300                       | 150                             | mV   |
| C <sub>L</sub>    | 50                              | 50                        | 30                              | pF   |

LVC Link

### TEST CIRCUITS FOR ALL OUTPUTS

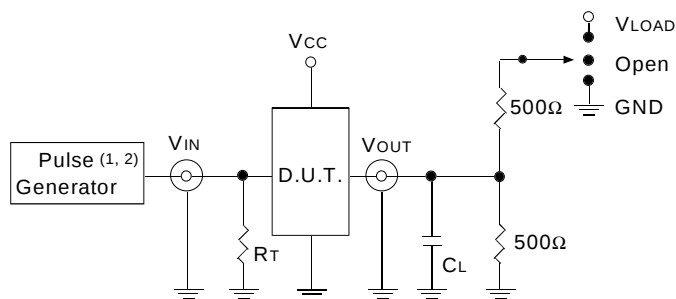

LVC Link

#### DEFINITIONS:

C<sub>L</sub> = Load capacitance: includes jig and probe capacitance.  
R<sub>T</sub> = Termination resistance: should be equal to Z<sub>OUT</sub> of the Pulse Generator.

#### NOTES:


1. Pulse Generator for All Pulses: Rate ≤ 10MHz; t<sub>F</sub> ≤ 2.5ns; t<sub>R</sub> ≤ 2.5ns.
2. Pulse Generator for All Pulses: Rate ≤ 10MHz; t<sub>F</sub> ≤ 2ns; t<sub>R</sub> ≤ 2ns.

### SWITCH POSITION

| Test                                    | Switch            |
|-----------------------------------------|-------------------|
| Open Drain<br>Disable Low<br>Enable Low | V <sub>LOAD</sub> |
| Disable High<br>Enable High             | GND               |
| All Other tests                         | Open              |

LVC Link

### OUTPUT SKEW - t<sub>SK</sub> (x)

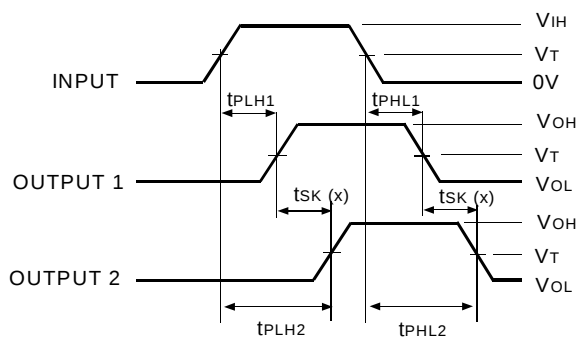


$$t_{SK}(x) = |t_{PLH2} - t_{PLH1}| \text{ or } |t_{PHL2} - t_{PHL1}|$$

LVC Link

#### NOTES:


1. For t<sub>SK</sub>(o) OUTPUT1 and OUTPUT2 are any two outputs.
2. For t<sub>SK</sub>(b) OUTPUT1 and OUTPUT2 are in the same bank.

### PROPAGATION DELAY

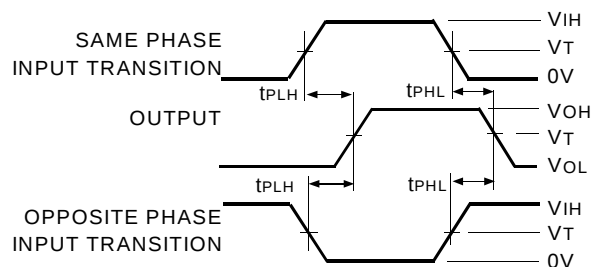

LVC Link

### ENABLE AND DISABLE TIMES

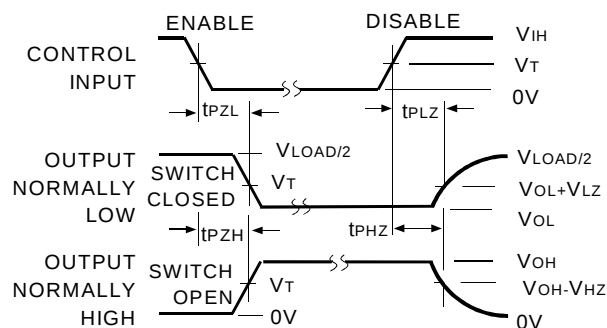


LVC Link

#### NOTE:


1. Diagram shown for input Control Enable-LOW and input Control Disable-HIGH.

### SET-UP, HOLD, AND RELEASE TIMES

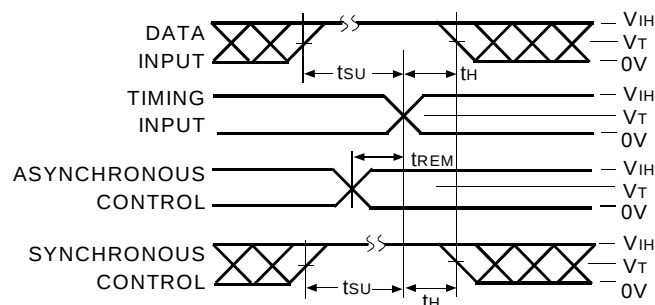

LVC Link

### PULSE WIDTH

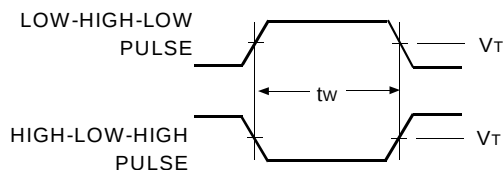

LVC Link

## ORDERING INFORMATION

| IDT | XX          | LVC | X        | XX     | XXXX        | XX      |                                                  |
|-----|-------------|-----|----------|--------|-------------|---------|--------------------------------------------------|
|     | Temp. Range |     | Bus-Hold | Family | Device Type | Package |                                                  |
|     |             |     |          |        |             | PV      | Shrink Small Outline Package (SO56-1)            |
|     |             |     |          |        |             | PA      | Thin Shrink Small Outline Package (SO56-2)       |
|     |             |     |          |        |             | PF      | Thin Very Small Outline Package (SO56-3)         |
|     |             |     |          |        | 827A        |         | 20-Bit Buffer with 5 Volt Tolerant I/O           |
|     |             |     |          | 162    |             |         | Double-Density with Resistors, $\pm 12\text{mA}$ |
|     |             |     | Blank    |        |             |         | No Bus-hold                                      |
|     |             |     |          | 74     |             |         | $-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$   |



**CORPORATE HEADQUARTERS**  
 2975 Stender Way  
 Santa Clara, CA 95054

**for SALES:**  
 800-345-7015 or 408-727-6116  
 fax: 408-492-8674  
[www.idt.com](http://www.idt.com)\*

\*To search for sales office near you, please click the sales button found on our home page or dial the 800# above and press 2.  
 The IDT logo is a registered trademark of Integrated Device Technology, Inc.