



ULTRA WIDE BAND, HIGH SLEW RATE DUAL OPERATIONAL AMPLIFIER

■ GENERAL DESCRIPTION

The NJM2137 is an ultra wide band, high slew rate dual operational amplifier operated from low voltage ($\pm 1.35V$).

It can apply to active filter, high speed analog and digital signal processor, line driver, HDTV, industrial measurement equipment and others.

It can also apply to portable communication items because of low operating voltage and low operating current.

■ PACKAGE OUTLINE



NJM2137V




NJM2137M

■ FEATURES


- Operating Voltage $(\pm 1.35V \sim \pm 6V)$
- Ultra Wide Band $(200MHz \text{ typ.})$
- High Slew Rate $(45V/\mu s \text{ typ.})$
- Low Operating Current $(1.14mA \text{ typ.})$
- Bipolar Technology
- Package Outline SSOP8, DMP8

■ PIN CONFIGURATION

4

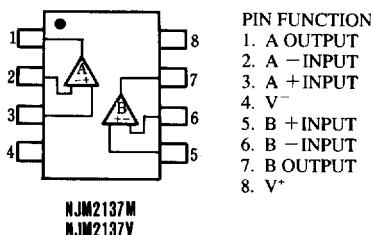

■ EQUIVALENT CIRCUIT (1/2 Shown)

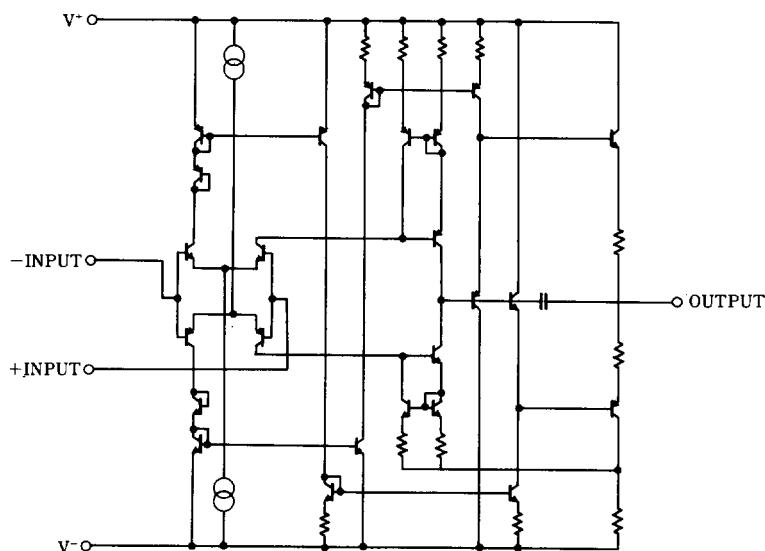



■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺ /V ⁻	±6.75	V
Differential Input Voltage	V _{ID}	±3	V
Power Dissipation	P _D	(SSOP-8) 250 (DMP-8) 300	mV
Operating Temperature Range	T _{opr}	-40~+85	°C
Storage Temperature Range	T _{stg}	-50~+125	°C

■ ELECTRICAL CHARACTERISTICS

(V⁺/V⁻ = ±2.5V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Operating Voltage	V ⁺ /V ⁻		±1.35	±2.50	±6.00	V
Input Offset Voltage	V _{IO}	R _S =0Ω	—	1.0	5.0	mV
Input Bias Current	I _B		—	0.5	2.0	μA
Input Offset Current	I _{IO}		—	20	200	nA
Large Signal Voltage Gain	A _V	R _L ≥10kΩ	65	75	—	dB
Input Common Mode Voltage Range	V _{ICM}		1.2	1.5	—	V
			-1.2	-1.5	—	
Common Mode Rejection Ratio	CMR	-1V≤V _{cm} ≤+1V	45	60	—	dB
Supply Voltage Rejection Ratio	+SVR		50	60	—	dB
	-SVR		70	80	—	
Maximum Output Voltage	V _{OM}	R _L =1kΩ	1.1	1.4	—	V
			-0.9	-1.2	—	
Opreating Current	I _{CC}	R _L =∞(all Amp.)	—	1.14	1.5	mA
Slew Rate	SR	A _V =0dB	—	45	—	V/μs
Gain Bandwidth Product	GB	60dB · 500kHz	100	200	—	MHz
Phase Margin	φ _M	40dB	—	25	—	deg
Unity Gain Frequency	f _T	40dB	—	40	—	MHz