

3-INPUT/2-INPUT VIDEO SWITCH

■ GENERAL DESCRIPTION

The NJM2506 is video switch for video and audio signal. It contains 3 input-1 output and 2 input-1 output video switch. 3 input-1 output switch has clamp function and so is applied to fixed DC level of video signal. Its operating voltage is 4.75 to 13V and bandwidth is 10MHz. Crosstalk is 75dB (at $f=4.43\text{MHz}$).

■ FEATURES

- Wide Operating Supply Range (+4.75V ~ +13V)
- 3 Input-1 Output and 2 Input-1 Output
- Internal Clamp Function
- Crosstalk 75dB (at 4.43MHz)
- Wide Frequency Range 10MHz (2V_{P-P} Input)
- Package Outline DIP16, DMP16, SSOP16
- Bipolar Technology


■ RECOMMENDED OPERATING CONDITION

- Operating Voltage V+ 4.75~13.0V


■ APPLICATION

- VCR, Video Camera, AV-TV, Video Disk Player.


■ BLOCK DIAGRAM

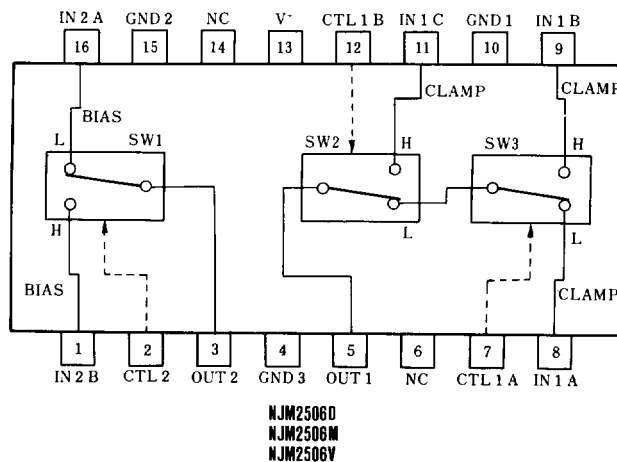

■ PACKAGE OUTLINE



NJM2506D



NJM2506M



NJM2506V



■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺	14	V
Power Dissipation	P _D	(DIP16) 700	mW
		(DMP16) 350	mW
		(SSOP16) 300	mW
Operating Temperature Range	T _{opr}	-20~+75	°C
Storage Temperature Range	T _{stg}	-40~+125	°C

■ ELECTRICAL CHARACTERISTICS

(V⁺=5V, Ta=25°C)


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current (1)	I _{CC1}	V ⁺ =5V (Note1)	6.7	9.7	12.7	mA
Operating Current (2)	I _{CC2}	V ⁺ =9V (Note1)	8.6	12.3	16.0	mA
Voltage Gain	G _v	V _i = 2V _{p-p} /100kHz, V _O /V _i	-0.6	-0.1	+0.4	dB
Frequency Response	G _f	V _i = 2V _{p-p} , V _O (10MHz/100kHz)	-1.0	0	+1.0	dB
Differential Gain	DG	V _i = 2V _{p-p} , Staircase Signal	—	0.3	—	%
Differential Phase	DP	V _i = 2V _{p-p} , Staircase Signal	—	0.3	—	deg
Output Offset Voltage (1)	V _{OS1}	(Note2)	-10	0	+10	mV
Output Offset Voltage (2)	V _{OS2}	(Note3)	-30	0	+30	mV
Crosstalk	CT	V _i = 2V _{p-p} , 4.43MHz, V _O /V _i	—	-75	—	dB
Switch Change Voltage	V _{CH}	All inside SW: ON	2.5	—	—	V
Switch Change Voltage	V _{CL}	All inside SW: OFF	—	—	1.0	V

(Note 1): S1=S2=S3=S4=S5=S6=S7=1

(Note 2): Output DC Voltage Difference is tested on S6=1→2, S1=S2=S3=S4=S5=1, S8=2 and S7=1

(Note 3): Output DC Voltage Difference is tested on S6=1→2, S7=1(or S6=1, S7=1→2), S1=S2=S3=S4=S5=1 and S8=1

■ TEST CIRCUIT






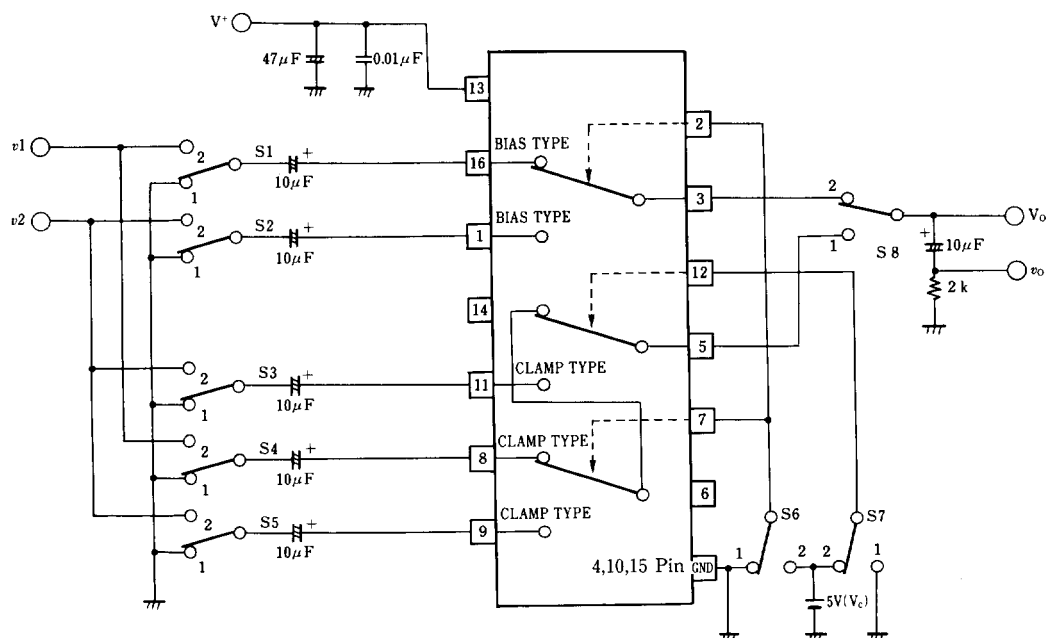


**■ PIN FUNCTION**

PIN No.	PIN NAME	DC VOLTAGE	INSIDE EQUIVALENT CIRCUIT
16 1	IN 2 A IN 2 B (Input)	2.5V	
8 9 11	IN 1 A IN 1 B IN 1 C (Input)	1.5V	
7 12 2	CTL 1 A CTL 1 B CTL 2 (Control)		
5	OUT 1 (Output)	1.8V	
3	OUT 2 (Output)	0.8V	
13	V+	5 V	
15 4 10	GND 1 GND 2 GND 3		









■ TYPICAL CHARACTERISTICS ($T_a = +25^\circ\text{C}$)

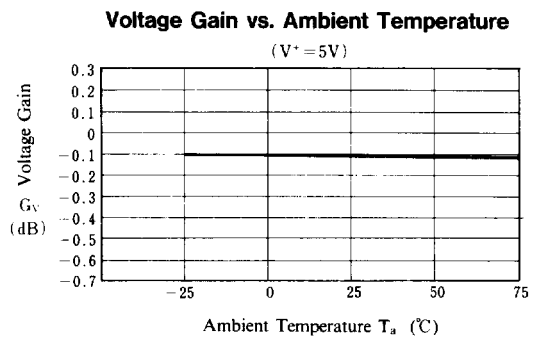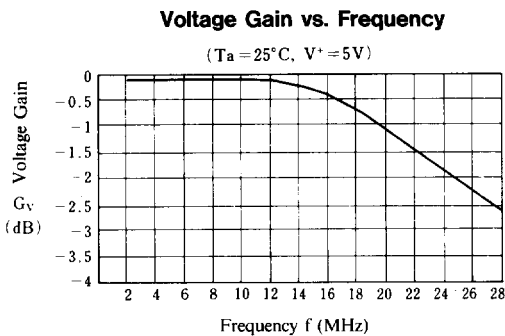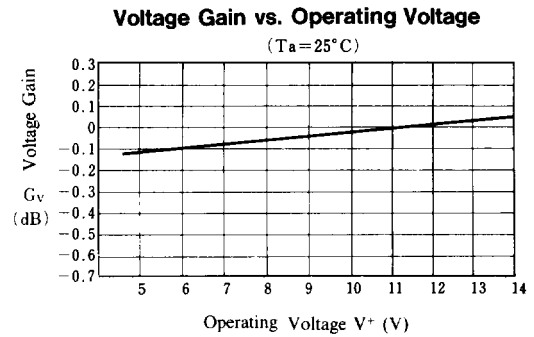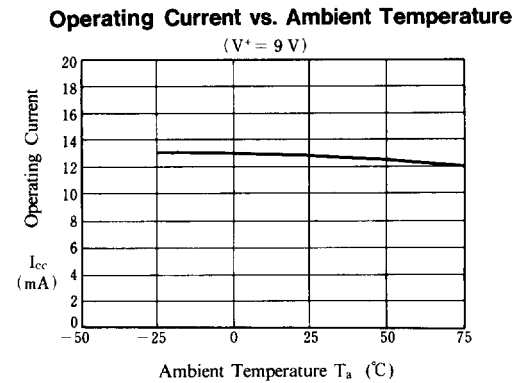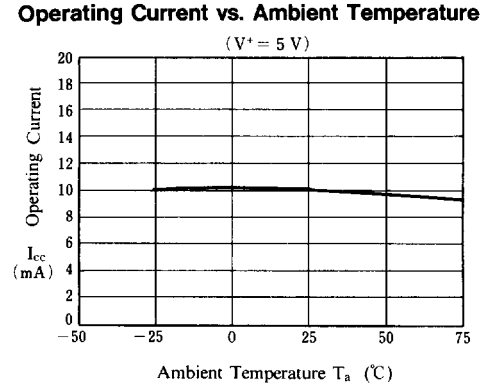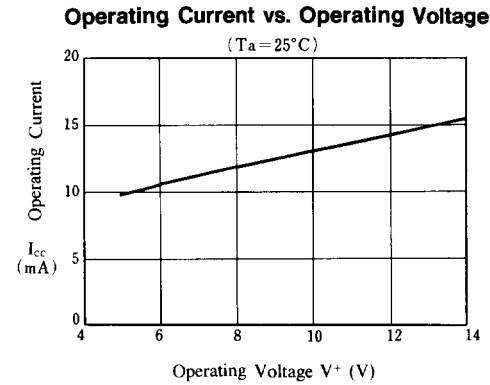









■ TYPICAL CHARACTERISTICS ($T_a = +25^\circ\text{C}$)

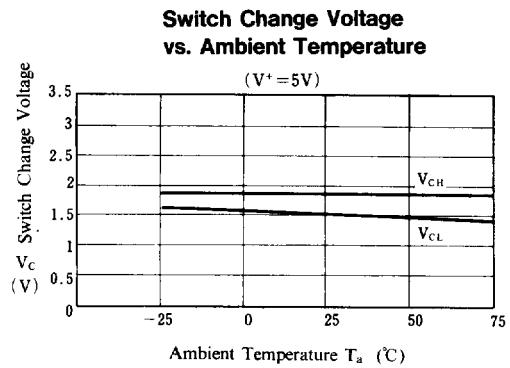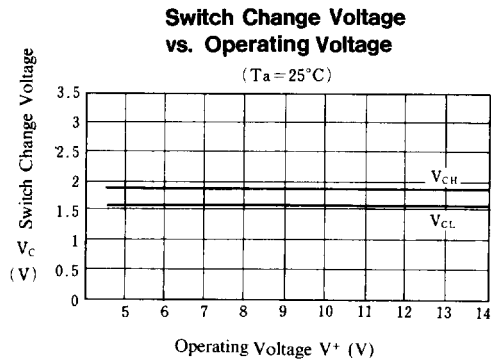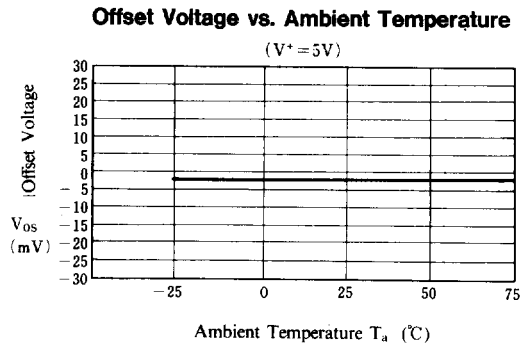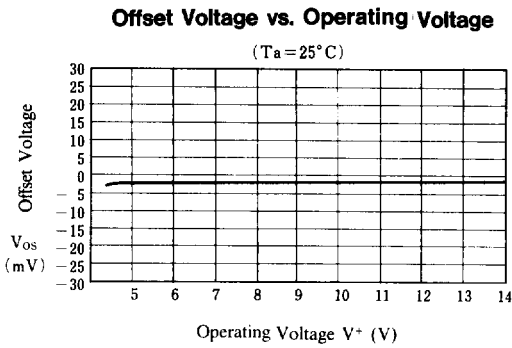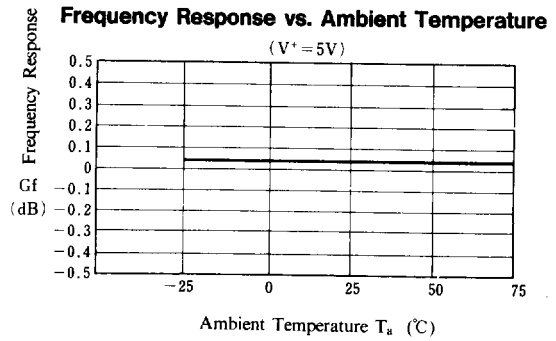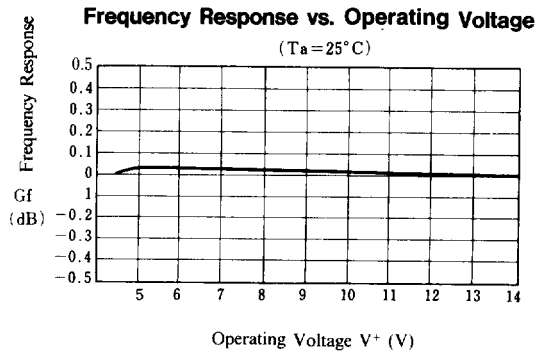









■ TYPICAL CHARACTERISTICS ($T_a = +25^\circ\text{C}$)

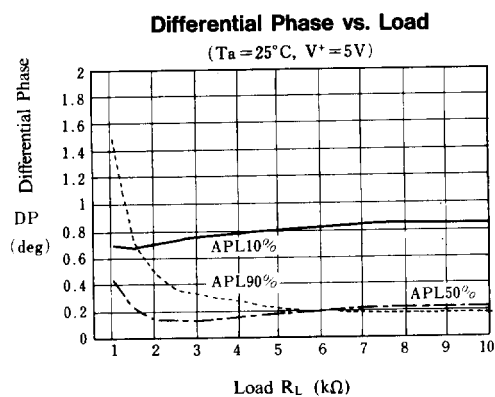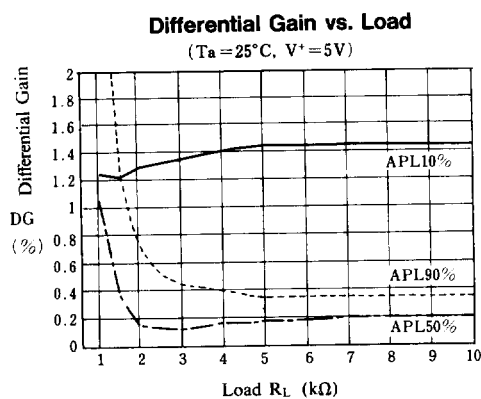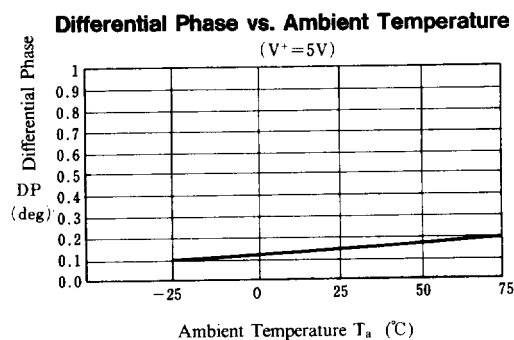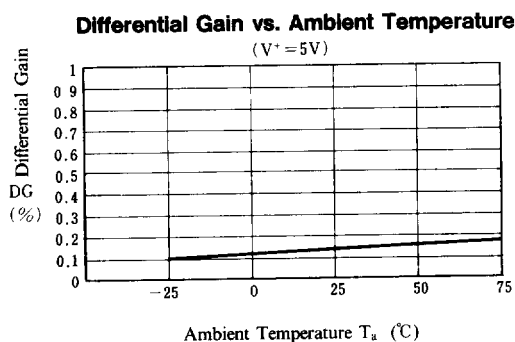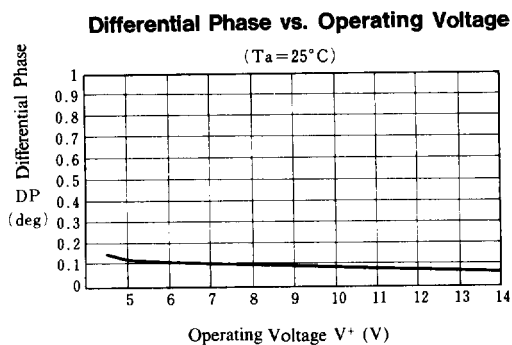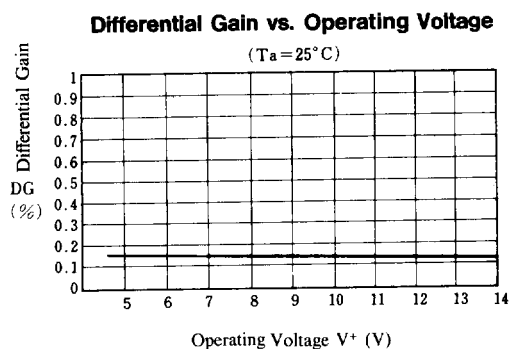




■ TYPICAL CHARACTERISTICS ($T_a = +25^\circ\text{C}$)

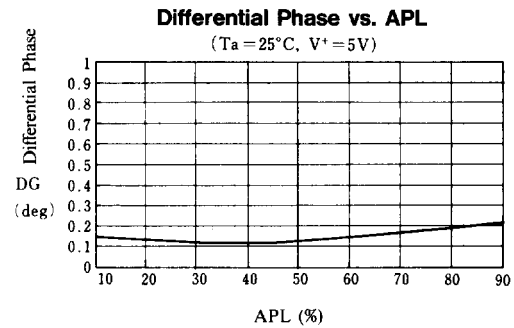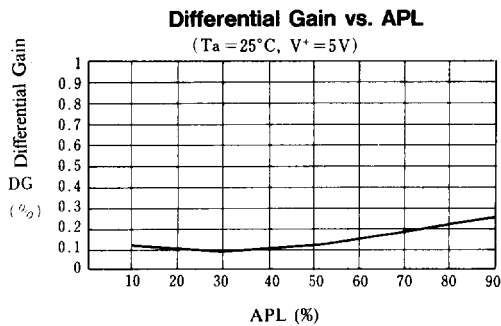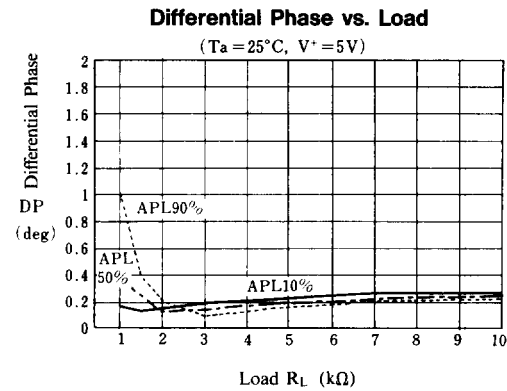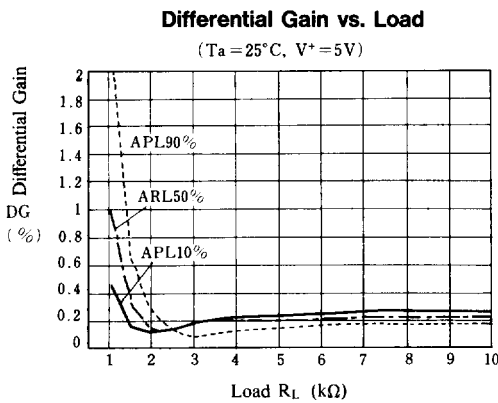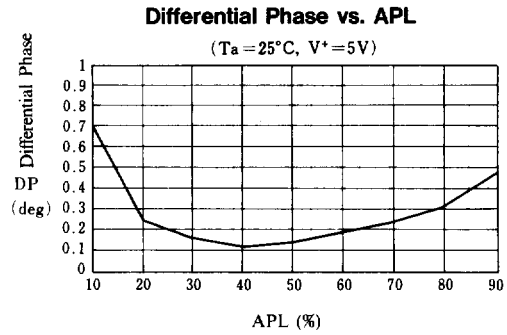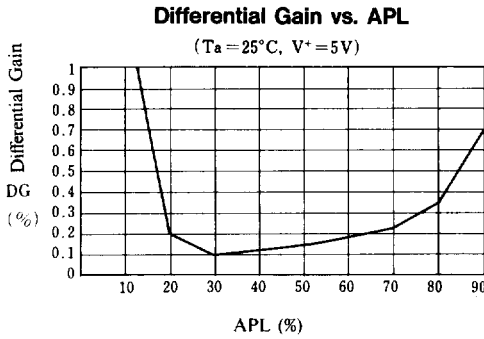




■ TYPICAL CHARACTERISTICS (Ta = +25°C)


Crosstalk(IN2A to OUT2)vs. Operating Voltage

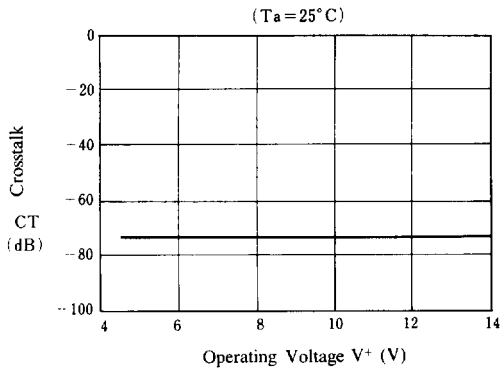


Crosstalk(IN2A to OUT2)vs. Ambient Temperature

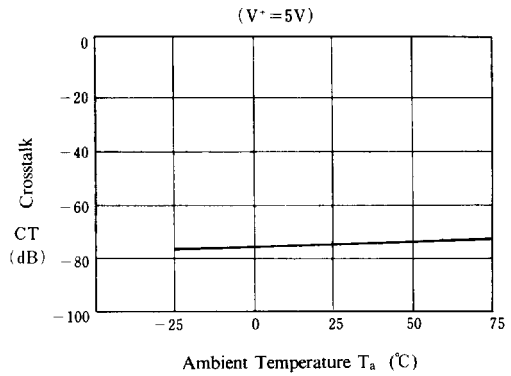


Crosstalk(IN1B to OUT1)vs. Operating Voltage

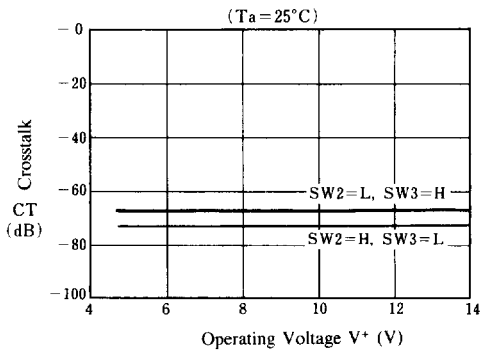


Crosstalk(IN1B to OUT1)vs. Ambient Temperature

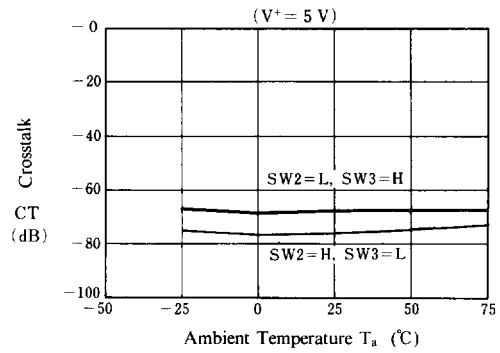

Crosstalk(IN1B to OUT1)vs. Operating Voltage

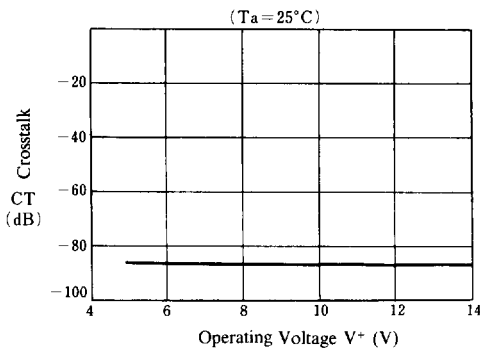

Crosstalk(IN1B to OUT1)vs. Ambient Temperature

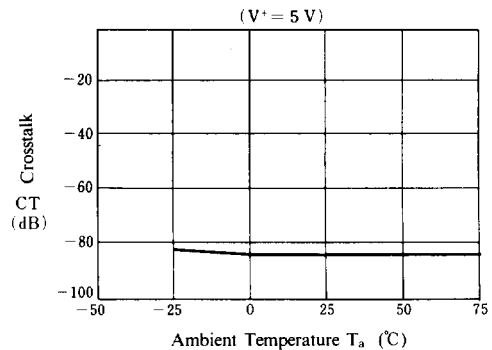



■ TYPICAL CHARACTERISTICS ($T_a = +25^\circ\text{C}$)

