


The RF Line Triple Video Driver Hybrid Amplifier

A high performance triple CRT driver designed specially for use as the video channel final stage in high resolution color monitors.

- Typical 10–90% Transitions Times are 3.0 ns
- 110 MHz – 3.0 dB Bandwidth at 40 V_{p-p} Output
- 220 MHz Pixel Frequency
- Up to 60 V_{p-p} Output Swing with 70 V Supply Voltage
- Low Power Consumption
- Excellent Gray-scale Linearity
- Unconditional Stability
- Gold Metallization System for the Ultimate in Reliability

MHW3628

**3.0 ns
TRIPLE VIDEO DRIVER
HYBRID
AMPLIFIER**

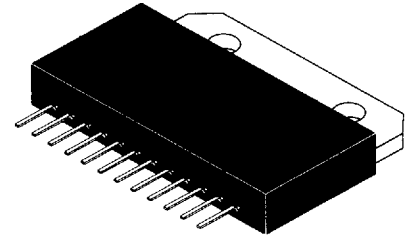

CASE 455-01, STYLE 1

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Supply Voltage	V _{CC}	80	Vdc
Operating Case Temperature Range	T _C	–20 to +100	°C
Storage Temperature Range	T _{stg}	–40 to +100	°C

ELECTRICAL CHARACTERISTICS (T_C = 25°C, V_{CC} = 70 V, C_{LOAD} = 10 pF, 40 V Peak-to-Peak Output Swing with 35 Vdc Offset, R₁ = 287 Ω, C₁ = 60 pF Typ)

Characteristic	Symbol	Min	Typ	Max	Unit
Supply Current (With Input Open Circuited) Per Channel	I _{CC}	33	37	41	mA
Input DC Voltage (With Input Open Circuited)	V _{inDC}	1.15	1.4	1.65	V
Input DC Voltage (With Input Open Circuited)	V _{outDC}	32	33	37	V
Voltage Gain (1) (2)	A _V	—	12.7	—	V/V
Transient Response (2)					
— Rise Time (10% to 90%)	t _r	—	3.0	3.4	ns
— Overshoot	V _{OS,r}	—	2.0	7.0	%
— Fall Time (90% to 10%)	t _f	—	2.8	3.2	ns
— Overshoot	V _{OS,f}	—	2.0	7.0	%
Operating Supply Current per Channel (V _{out} = 40 V Peak-to-Peak, 50 MHz Square Wave with 40 V Offset) (3)	I _{CC}	—	70	—	mA
Linearity Error (V _{out} = 5.0 V to +75 V)	—	—	—	5.0	%

(1) A_V = V_{out}/V_S

(2) Input Signal is normally a 62.5 KHz square wave of 3.2 V peak-to-peak with 1.4 Vdc offset. Input t_r, t_f < 1.0 ns

(3) Output is not short circuit protected



TYPICAL CHARACTERISTICS

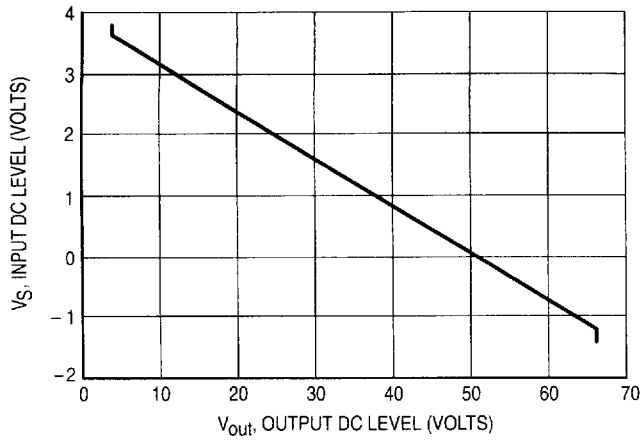


Figure 1. V_S versus V_{out}

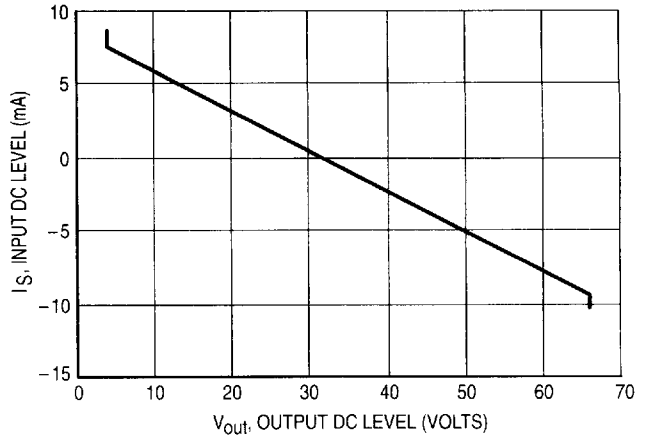


Figure 2. I_S versus V_{out}

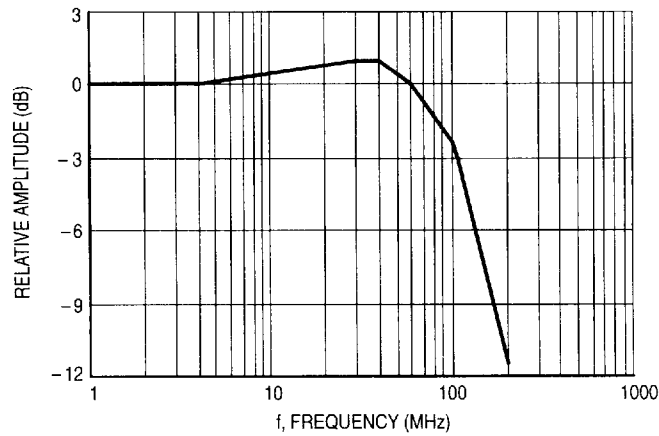


Figure 3. Frequency Response


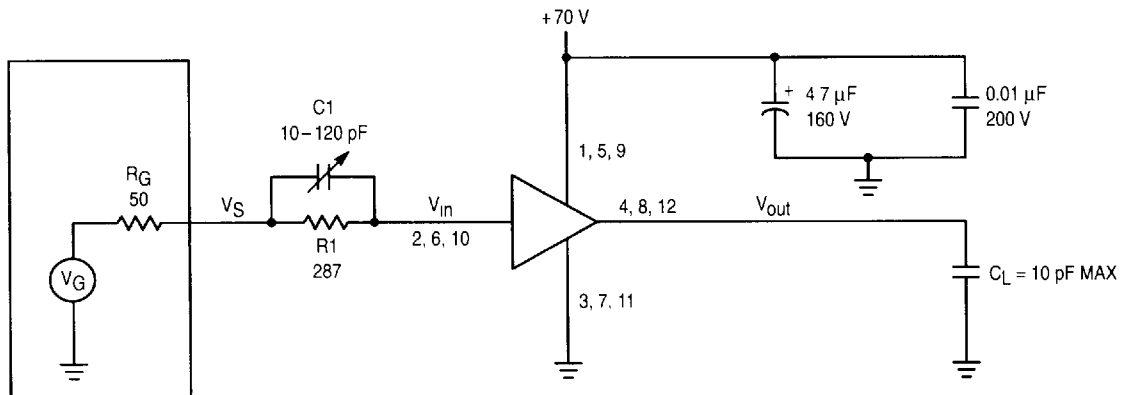


Figure 4. Hybrid Amplifier Test Circuit

PACKAGE DIMENSIONS

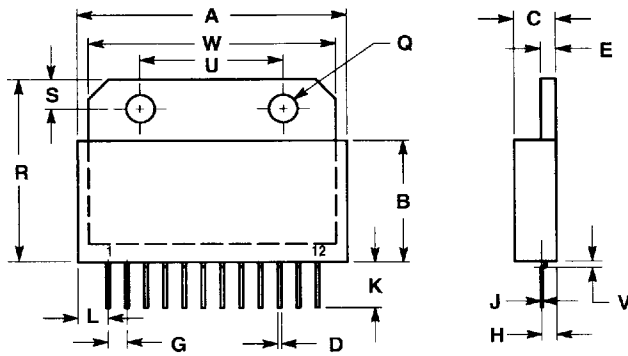

NOTES

- 1 DIMENSIONING AND TOLERANCING PER ANSI Y14.5M 1982
- 2 CONTROLLING DIMENSION INCH

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	—	1.415	—	35.94
B	—	0.665	—	16.89
C	0.210	0.225	5.33	5.72
D	0.020	—	0.51	—
E	0.070	0.085	1.78	2.16
G	0.095	0.105	2.41	2.67
H	0.065	0.085	1.65	2.16
J	0.010	—	0.25	—
K	0.250	—	5.33	—
L	0.150	0.160	3.81	4.06
Q	0.140	0.155	3.56	3.94
R	0.985	1.015	25.27	25.78
S	0.155	0.165	3.94	4.19
U	0.745	0.755	18.92	19.18
V	—	0.025	—	0.64
W	1.295	1.305	32.89	33.15

STYLE 1

- PIN 1 +VCC
 2 VIN
 3 GROUND
 4 VOUT
 5 +VCC
 6 VIN
 7 GROUND
 8 VOUT
 9 -VCC
 10 VIN
 11 GROUND
 12 VOUT

CASE 455-01
 ISSUE O