



Military Aerospace Division
Quality Assurance Mail Stop 10-225
1120 Kifer Road
Sunnyvale, CA 94086-3737 USA

Microcircuit Performance Radiation Report
Mil Std 883 Method 1019 Total Dose Radiation
Office(408)721-5000 FAX(408)721-3683

Irradiation Date: 05-Mar-1997
Device Type: RM54AC244SSA
Customer: RHA WAFER BANK
Package: F/P
Lot Number:
IPI Code: N/A

Attenuation: 1.000
Wafer Run:
Wafer Number:
Bias: INPUTS = HIGH
Dose Rate: 59.04 radSi/sec
Technician:

Summarized RHA Test Results

PROGRAM	REVISION	SPECNAME	STATUS	EXPOSURE
Z244JAN	9.01	RHA-25	PASSED	0K
Z244JAN	9.01	RHA-M-25	PASSED	3K
Z244JAN	9.01	RHA-D-25	PASSED	10K
Z244JAN	9.01	RHA-R-25	PASSED	30K
Z244JAN	9.01	RHA-R-25	PASSED	50K
Z244JAN	9.01	RHA-R-25	***	80K
Z244JAN	9.01	RHA-R-25	PASSED	100K

*** EXCEEDED POST IRRADIATION PARAMETRIC LIMITS, REQUIRES EXTENDED ROOM ANNEAL.

This lot PASSES per Mil Std 883 Method 1019

DISCLAIMER:

The results reported are representative only of the lot tested in this specific sample and should not be used as generic RHA qualification data for any similar products not Radiation Certified by National Semiconductor Corporation.

National Semiconductor uses different process flows for different product qualification levels and National Semiconductor will not guarantee the RHA performance of any product unless National Semiconductor has tested and certified the specific manufacturing lot.



Military Aerospace Division
Quality Assurance Mail Stop 10-225
1120 Kifer Road
Sunnyvale, CA 94086-3737 USA

Microcircuit Performance Radiation Report
Mil Std 883 Method 1019 Total Dose Radiation
Office(408)721-5000 FAX(408)721-3683


Irradiation Date: 05-Mar-1997
Device Type: RM54AC244SSA
Customer: RHA WAFER BANK
Package: F/P
Lot Number:
IPI Code: N/A

Attenuation: 1.000
Wafer Run:
Wafer Number:
Bias: INPUTS = HIGH
Dose Rate: 59.04 radSi/sec
Technician:

ICCH

Statistical Data for ICCH, INPUT Condition of 5.5 VOLTS, VCC=5.5 VOLTS. Measured Values are in AMPS.

Dose	MIN LIMIT	MIN	MEAN	MAX	MAX LIMIT	MEAN-3STD	MEAN+3STD	STDEV	COUNT	Delta	P/F
0K	-5.00E-08	-2.33E-08	-1.28E-08	-7.45E-09	9.00E-08	-3.74E-08	1.19E-08	8.21E-09	6	1.28E-08	PASS
3K	-1.00E-06	-7.45E-09	-7.45E-09	-7.45E-09	1.50E-05	-7.45E-09	-7.45E-09	9.93E-17	6	7.45E-09	PASS
10K	-1.00E-06	7.76E-06	2.27E-05	4.32E-05	7.50E-05	-2.63E-05	7.17E-05	1.63E-05	6	-2.27E-05	PASS
30K	-2.00E-05	6.56E-05	2.33E-04	4.58E-04	7.00E-04	-3.04E-04	7.70E-04	1.79E-04	6	-2.33E-04	PASS
50K	-2.00E-05	6.56E-05	2.68E-04	5.41E-04	7.00E-04	-3.87E-04	9.23E-04	2.18E-04	6	-2.68E-04	PASS
80K	-2.00E-05	5.53E-05	2.56E-04	5.29E-04	7.00E-04	-3.99E-04	9.10E-04	2.18E-04	6	-2.56E-04	PASS
100K	-2.00E-05	3.46E-05	1.67E-04	3.52E-04	7.00E-04	-2.73E-04	6.06E-04	1.46E-04	6	-1.67E-04	PASS

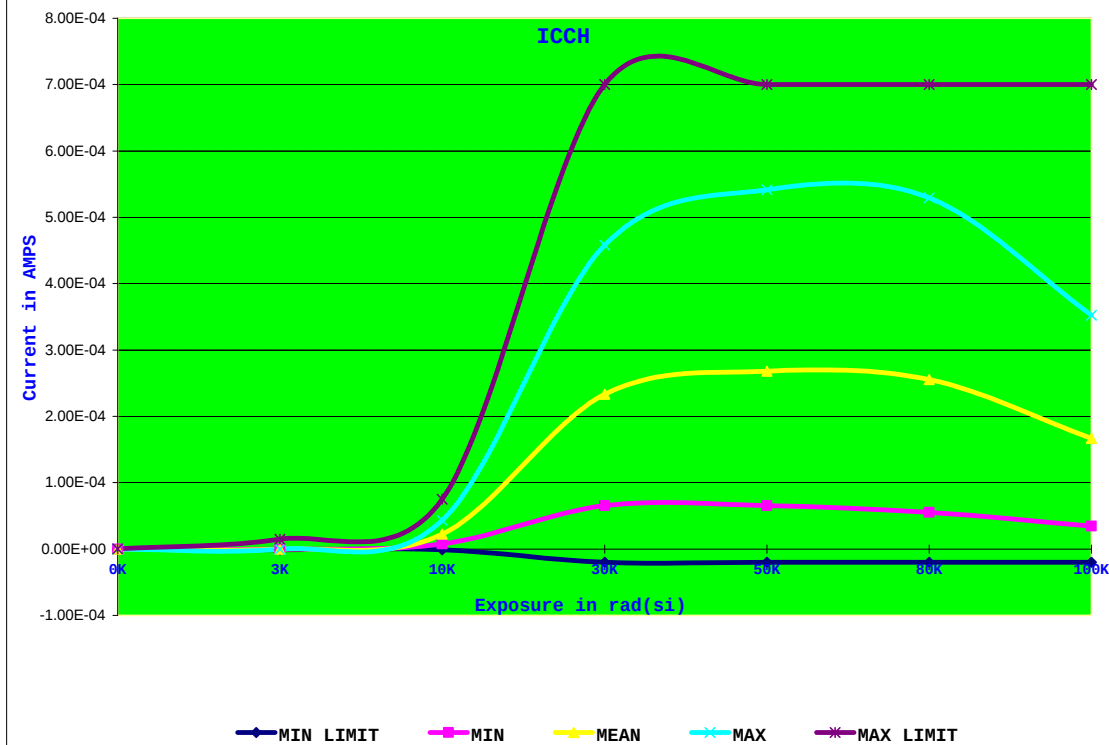



Military Aerospace Division
Quality Assurance Mail Stop 10-225
1120 Kifer Road
Sunnyvale, CA 94086-3737 USA

Microcircuit Performance Radiation Report
Mil Std 883 Method 1019 Total Dose Radiation
Office(408)721-5000 FAX(408)721-3683


Irradiation Date: 05-Mar-1997
Device Type: RM54AC244SSA
Customer: RHA WAFER BANK
Package: F/P
Lot Number:
IPI Code: N/A

Attenuation: 1.000
Wafer Run:
Wafer Number:
Bias: INPUTS = HIGH
Dose Rate: 59.04 radSi/sec
Technician:

ICCL

Statistical Data for ICCL, INPUT Condition of 5.5 VOLTS, VCC=5.5 VOLTS. Measured Values are in AMPS.

Dose	MIN LIMIT	MIN	MEAN	MAX	MAX LIMIT	MEAN-3STD	MEAN+3STD	STDEV	COUNT	Delta	P/F
0K	-5.00E-08	-2.33E-08	-1.80E-08	-1.54E-08	9.00E-08	-3.04E-08	-5.74E-09	4.10E-09	6	1.80E-08	PASS
3K	-1.00E-06	-2.33E-08	-1.67E-08	-1.54E-08	1.50E-05	-2.65E-08	-6.99E-09	3.24E-09	6	1.67E-08	PASS
10K	-1.00E-06	1.23E-06	3.55E-06	7.03E-06	7.50E-05	-4.28E-06	1.14E-05	2.61E-06	6	-3.55E-06	PASS
30K	-2.00E-05	7.45E-05	1.94E-04	3.64E-04	7.00E-04	-1.97E-04	5.84E-04	1.30E-04	6	-1.94E-04	PASS
50K	-2.00E-05	1.46E-04	3.71E-04	6.80E-04	7.00E-04	-3.56E-04	1.10E-03	2.42E-04	6	-3.71E-04	PASS
80K	-2.00E-05	1.61E-04	4.42E-04	8.18E-04	7.00E-04	-4.51E-04	1.33E-03	2.98E-04	6	-4.42E-04	*FAIL*
100K	-2.00E-05	9.32E-05	2.80E-04	5.31E-04	7.00E-04	-3.17E-04	8.77E-04	1.99E-04	6	-2.80E-04	PASS

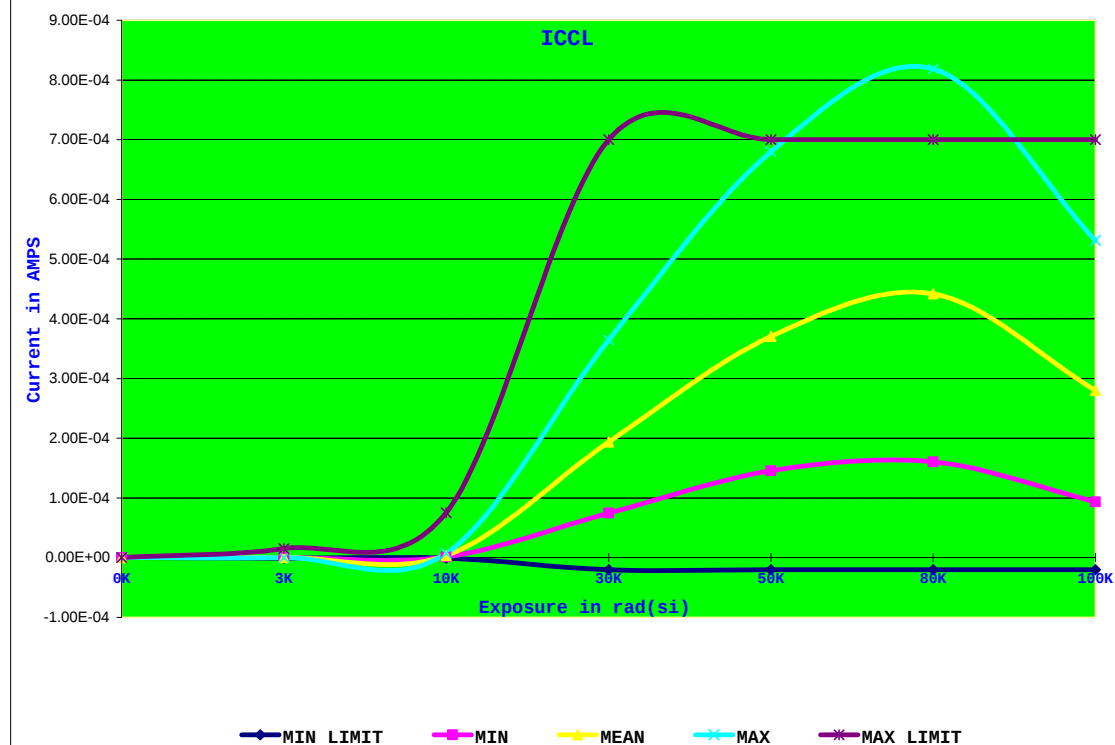



Military Aerospace Division
Quality Assurance Mail Stop 10-225
1120 Kifer Road
Sunnyvale, CA 94086-3737 USA

Microcircuit Performance Radiation Report
Mil Std 883 Method 1019 Total Dose Radiation
Office(408)721-5000 FAX(408)721-3683


Irradiation Date: 05-Mar-1997
Device Type: RM54AC244SSA
Customer: RHA WAFER BANK
Package: F/P
Lot Number:
IPI Code: N/A

Attenuation: 1.000
Wafer Run:
Wafer Number:
Bias: INPUTS = HIGH
Dose Rate: 59.04 radSi/sec
Technician:

IOZH3

Statistical Data for IOZH3, INPUT Condition of 5.5 VOLTS, VCC=5.5 VOLTS. Measured Values are in AMPS.

Dose	MIN LIMIT	MIN	MEAN	MAX	MAX LIMIT	MEAN-3STD	MEAN+3STD	STDEV	COUNT	Delta	P/F
0K		-9.32E-10	3.07E-10	1.43E-09	5.00E-07	-1.66E-09	2.28E-09	6.57E-10	48	-3.07E-10	PASS
3K		-7.94E-09	1.08E-09	7.45E-09	1.00E-06	-9.53E-09	1.17E-08	3.54E-09	48	-1.08E-09	PASS
10K		-7.94E-09	5.81E-10	7.45E-09	3.00E-06	-1.10E-08	1.21E-08	3.85E-09	48	-5.81E-10	PASS
30K		-1.27E-07	-1.45E-08	1.11E-07	2.00E-05	-2.23E-07	1.94E-07	6.95E-08	48	1.45E-08	PASS
50K		-1.27E-07	-1.45E-08	1.11E-07	2.00E-05	-2.23E-07	1.94E-07	6.95E-08	48	1.45E-08	PASS
80K		-1.27E-07	-1.45E-08	1.11E-07	2.00E-05	-2.10E-07	1.81E-07	6.50E-08	48	1.45E-08	PASS
100K		-1.27E-07	-2.25E-08	1.11E-07	2.00E-05	-2.34E-07	1.89E-07	7.04E-08	48	2.25E-08	PASS

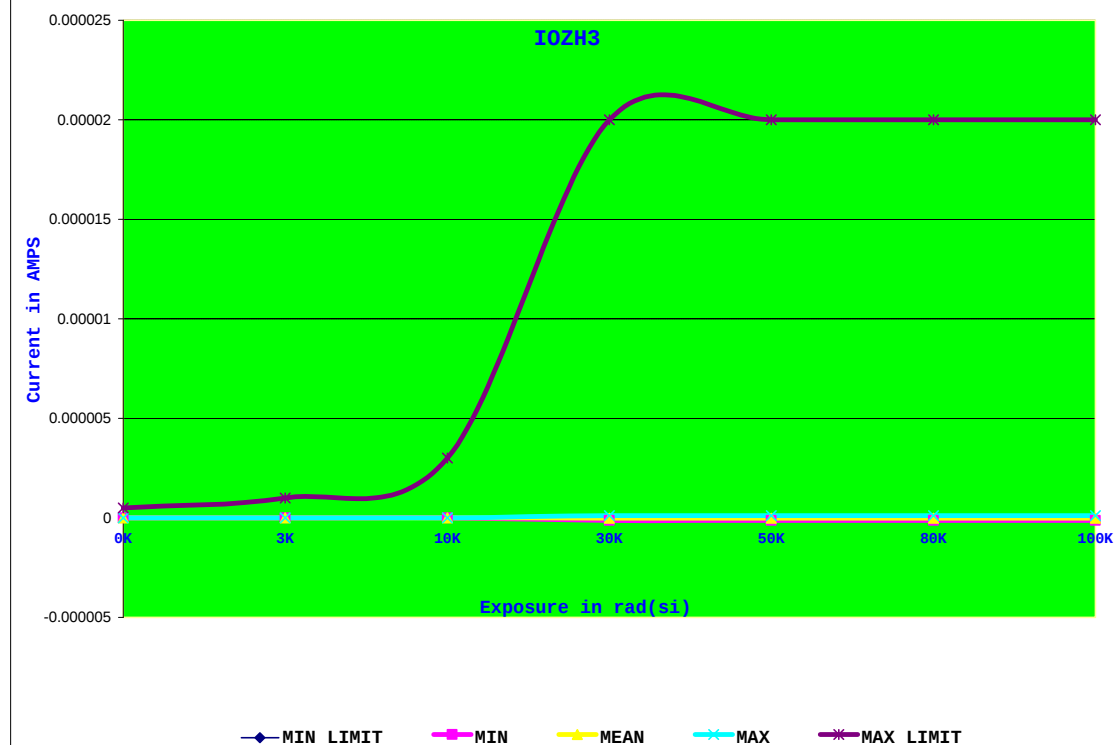



Military Aerospace Division
Quality Assurance Mail Stop 10-225
1120 Kifer Road
Sunnyvale, CA 94086-3737 USA

Microcircuit Performance Radiation Report
Mil Std 883 Method 1019 Total Dose Radiation
Office(408)721-5000 FAX(408)721-3683

Irradiation Date: 05-Mar-1997
Device Type: RM54AC244SSA
Customer: RHA WAFER BANK
Package: F/P
Lot Number:
IPI Code: N/A

Attenuation: 1.000
Wafer Run:
Wafer Number:
Bias: INPUTS = HIGH
Dose Rate: 59.04 radSi/sec
Technician:

IOZL3

Statistical Data for IOZL3, INPUT Condition of 0 VOLTS, VCC=5.5 VOLTS. Measured Values are in AMPS.

Dose	MIN LIMIT	MIN	MEAN	MAX	MAX LIMIT	MEAN-3STD	MEAN+3STD	STDEV	COUNT	Delta	P/F
0K	-5.00E-07	-3.38E-09	-9.85E-10	4.66E-10		-3.54E-09	1.57E-09	8.52E-10	48	9.85E-10	PASS
3K	-1.00E-06	-8.44E-09	-4.05E-09	6.96E-09		-1.79E-08	9.83E-09	4.63E-09	48	4.05E-09	PASS
10K	-3.00E-06	-8.44E-09	-4.22E-09	6.96E-09		-1.65E-08	8.02E-09	4.08E-09	48	4.22E-09	PASS
30K	-2.00E-05	-1.27E-07	-1.46E-08	1.11E-07		-1.61E-07	1.32E-07	4.88E-08	48	1.46E-08	PASS
50K	-2.00E-05	-1.35E-07	-1.99E-08	7.94E-09		-1.46E-07	1.06E-07	4.20E-08	48	1.99E-08	PASS
80K	-2.00E-05	-1.35E-07	-3.31E-08	1.11E-07		-2.06E-07	1.40E-07	5.77E-08	48	3.31E-08	PASS
100K	-2.00E-05	-1.27E-07	-1.19E-08	1.19E-07		-1.53E-07	1.29E-07	4.69E-08	48	1.19E-08	PASS

