


POW-R-BLOK™

Dual/Single Diode Isolated Modules
Up to 165 Amperes & 1600 Volts

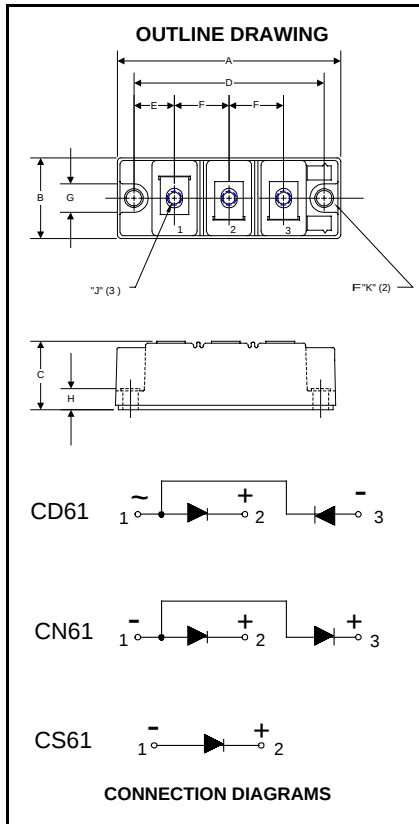

C 61 16A

Dual Diode & Single Diode
Pow-R-Blok™ Modules
160 Amperes to 1600 Volts

Ordering Information:

Example: Select the complete nine-digit module part number from the table below.

Example: CD611616A is a 1600 Volt, 160 Ampere Dual Diode Isolated POW-R-BLOK™ Module

C__61__16A Outline Dimensions

Dimension	Inches	Millimeters
A	3.70	94
B	1.38	35
C	1.18	30
D	3.15	80
E	0.67	17
F	0.91	23
G	0.57	14.5
H	0.35	9
J	M6	M6
K	0.26	6.5

Note: Dimensions are for reference only.

Type	Voltage Volts (x100)	Current Amperes (x10)
CD61	08	16
CN61	12	
CS61	14	
	16	

Description:

Powerex Dual Diode & Single Diode Modules are designed for use in applications requiring rectification and isolated packaging. The modules are isolated for easy mounting with other components on a common heatsink. POW-R-BLOK™ has been tested and recognized by the Underwriters Laboratories.

Features:

- Electrically Isolated Heatsinking
- DBC Alumina Insulator
- Glass Passivated Chips
- Metal Baseplate
- Low Thermal Impedance for Improved Current Capability
- UL Recognized (E78240)

Benefits:

- No Additional Insulation Components Required
- Easy Installation
- No Clamping Components Required
- Reduce Engineering Time

Applications:

- Power Supplies
- Bridge Circuits
- AC & DC Motor Drives
- Battery Supplies
- Large IGBT Circuit Front Ends
- Welders

**CD61_16A****CN61 16A, CS61 16A**

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

POW-R-BLOK™**Dual/Single Diode Isolated Modules**
Up to 165 Amperes & 1600 Volts**Absolute Maximum Ratings**

Characteristics	Conditions	Symbol		Units
Repetitive Peak Reverse Blocking Voltage		V_{RRM}	up to 1600	V
Non-Repetitive Peak Reverse Blocking Voltage		V_{RSM}	$V_{RRM} + 100$	V
(t < 5 msec)				
RMS Forward Current	180° Conduction, $T_C=100^{\circ}\text{C}$	$I_{F(RMS)}$	260	A
Average Forward Current	180° Conduction, $T_C=100^{\circ}\text{C}$	$I_{F(AV)}$	165	A
Peak One Cycle Surge Current, Non-Repetitive	60 Hz, 100% V_{RRM} reapplied, $T_J = 150^{\circ}\text{C}$	I_{FSM}	3,500	A
	60 Hz, No V_{RRM} reapplied, $T_J = 150^{\circ}\text{C}$	I_{FSM}	4,200	A
	50 Hz, 100% V_{RRM} reapplied, $T_J = 150^{\circ}\text{C}$	I_{FSM}	3,350	A
	50 Hz, No V_{RRM} reapplied, $T_J = 150^{\circ}\text{C}$	I_{FSM}	4,000	A
Peak Three Cycle Surge Current, Non-Repetitive	60 Hz, 100% V_{RRM} reapplied, $T_J = 150^{\circ}\text{C}$	I_{FSM}	2,600	A
	50 Hz, 100% V_{RRM} reapplied, $T_J = 150^{\circ}\text{C}$	I_{FSM}	2,480	A
Peak Ten Cycle Surge Current, Non-Repetitive	60 Hz, 100% V_{RRM} reapplied, $T_J = 150^{\circ}\text{C}$	I_{FSM}	1,750	A
	50 Hz, 100% V_{RRM} reapplied, $T_J = 150^{\circ}\text{C}$	I_{FSM}	1,820	A
I^2t for Fusing for One Cycle	8.3 ms, 100% V_{RRM} reapplied, $T_J = 150^{\circ}\text{C}$	I^2t	52,000	A^2sec
	8.3 ms, No V_{RRM} reapplied, $T_J = 150^{\circ}\text{C}$	I^2t	73,000	A^2sec
	10 ms, 100% V_{RRM} reapplied, $T_J = 150^{\circ}\text{C}$	I^2t	56,000	A^2sec
	10 ms, No V_{RRM} reapplied, $T_J = 150^{\circ}\text{C}$	I^2t	80,000	A^2sec
Operating Temperature		T_J	-40 to +150	$^{\circ}\text{C}$
Storage Temperature		T_{stg}	-40 to +150	$^{\circ}\text{C}$
Max. Mounting Torque, M6 Mounting Screw on Terminals			35 - 50	in. - Lb.
			4 - 6	Nm
Max. Mounting Torque, Module to Heatsink			35 - 50	in. - Lb.
			4 - 6	Nm
Module Weight, Typical			200	g
			7.1	Oz
V Isolation @ 25C		V_{rms}	3500	V

**CD61__16A****CN61__16A, CS61__16A**

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

POW-R-BLOK™**Dual/Single Diode Isolated Modules**
Up to 165 Amperes & 1600 Volts**Electrical Characteristics, T_J=25°C unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Max.	Units
Repetitive Peak Reverse Leakage Current	I _{RRM}	Up to 1600V, T _J =150°C		20	mA
Peak On-State Voltage	V _{FM}	T _J =25°C, I _{FM} =520A, 180° Conduction		1.43	V
Threshold Voltage, Low-level	V _{F(TO)1}	T _J = 150°C, I = 16.7% X π I _{F(AV)} to π I _{F(AV)}		0.73	V
Slope Resistance, Low-level	r _{T1}			1.5	mΩ
Threshold Voltage, High-level	V _{F(TO)2}	T _J = 150°C, I = π I _{F(AV)} to I _{FSM}		0.88	V
Slope Resistance, High-level	r _{T2}			1.26	mΩ
V _{TM} Coefficients, Full Range		T _J = 150°C, I = 15%I _{F(AV)} to I _{FSM} V _{FM} = A+ B Ln I +C I + D Sqrt I	A = B = C = D =	5.63E-01 3.92E-02 1.31E-03 -8.25E-05	


Thermal Characteristics

Characteristics	Symbol		Max.	Units
Thermal Resistance, Junction to Case	R _{θJ-C}	Per Module, both conducting Per Junction, both conducting	0.1 0.2	°C/W °C/W
Thermal Impedance Coefficients (Per Junction)	Z _{QJ-C}	Z _{QJ-C} = K ₁ (1-exp(-t/t ₁)) + K ₂ (1-exp(-t/t ₂)) + K ₃ (1-exp(-t/t ₃)) + K ₄ (1-exp(-t/t ₄))	K ₁ = 1.84E-02 K ₂ = 4.68E-02 K ₃ = 8.25E-02 K ₄ = 5.23E-02	t ₁ = 2.53E-06 t ₂ = 6.44E-02 t ₃ = 3.11E-01 t ₄ = 1.32
Thermal Resistance, Case to Sink Lubricated	R _{θC-S}	Per Module	0.05	°C/W


Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724)925-7272

Dual/Single Diode Modules 165 Amperes / up to 1600 Volts


Maximum On-State Forward Voltage Drop
($T_J = 150^\circ\text{C}$)

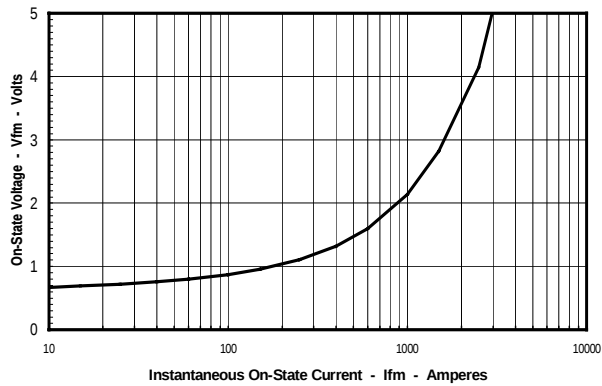


Maximum Transient Thermal Impedance
(Junction to Case, Per Diode)

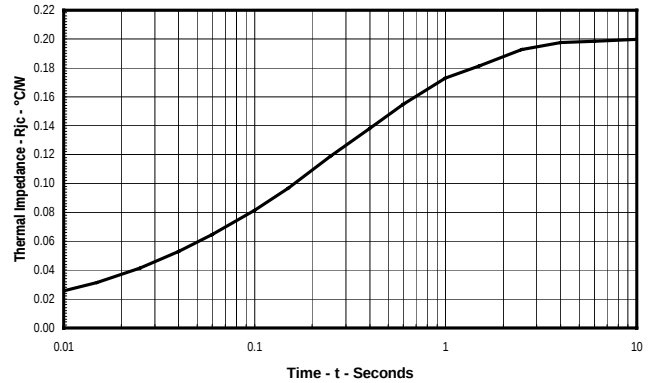


Maximum On-State Power Dissipation
(Sinusoidal Waveform)

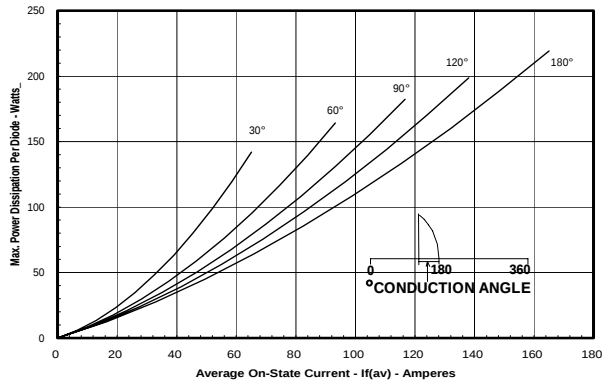

Maximum Allowable Case Temperature
(Sinusoidal Waveform)

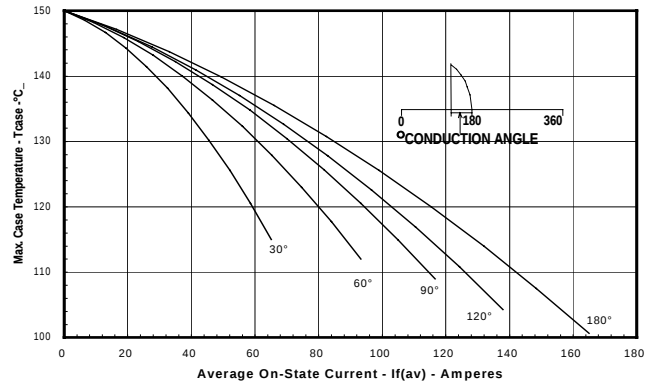

Maximum On-State Power Dissipation
(Rectangular Waveform)

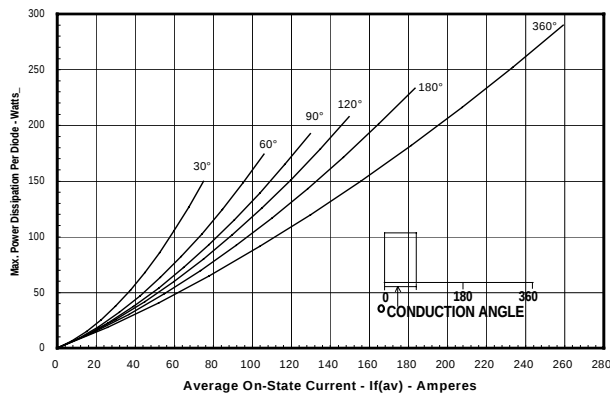

Maximum Allowable Case Temperature
(Rectangular Waveform)

