


Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

### POW-R-BLOK™ Dual Diode Isolated Module 600 Amperes / Up to 2400 Volts

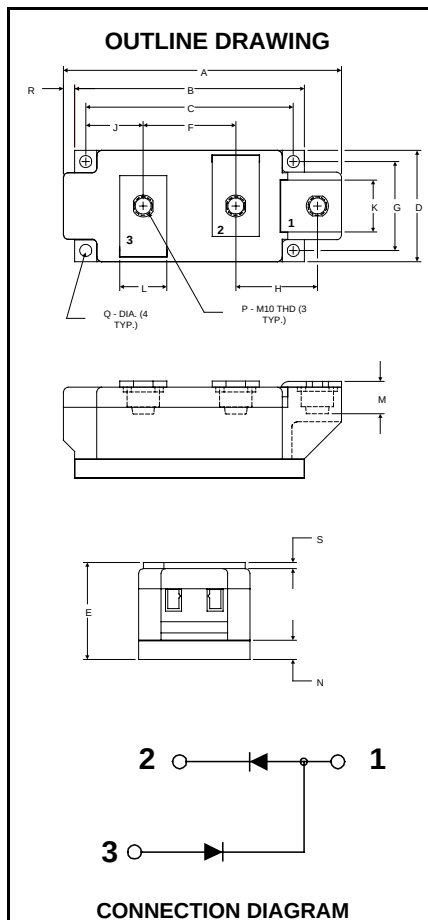

**LD41\_\_60**  
**Dual Diode Pow-R-Blok™ Module**  
600 Amperes to 2400 Volts

#### Description:

Powerex Dual Diode Modules are designed for use in applications requiring rectification and isolated packaging. The modules are isolated for easy mounting with other components on a common heatsink. POW-R-BLOK™ has been tested and recognized by the Underwriters Laboratories.

#### Features:

- Electrically Isolated Heatsinking
- Aluminum Nitride Insulator
- Compression Bonded Elements
- Metal Baseplate
- Low Thermal Impedance for Improved Current Capability
- UL Recognized

#### Benefits:

- No Additional Insulation Components Required
- Easy Installation
- No Clamping Components Required
- Reduce Engineering Time

#### Applications:

- Power Supplies
- Bridge Circuits
- AC & DC Motor Drives
- Battery Supplies
- Large IGBT Circuit Front Ends

#### LD41 Outline Dimensions

| Dimension | Inches      | Millimeters |
|-----------|-------------|-------------|
| A         | 5.91        | 150.0       |
| B         | 4.88        | 124.0       |
| C         | 4.41        | 112.0       |
| D         | 2.36        | 60.0        |
| E         | 2.05        | 52.0        |
| F         | 1.97        | 50.0        |
| G         | 1.89        | 48.0        |
| H         | 1.73        | 44.0        |
| J         | 1.22        | 31.0        |
| K         | 1.10        | 28.0        |
| L         | 1.00        | 25.4        |
| M         | 0.69        | 17.5        |
| N         | 0.39        | 10.0        |
| P         | M10 Metric  | M10         |
| Q         | 0.26 Dia.   | 6.5 Dia.    |
| R         | 0.24        | 6.0         |
| S         | 0.12        | 3.0         |
| T         | .110 x .032 | 2.5 x 0.8   |

Note: Dimensions are for reference only.

#### Ordering Information:

Example: Select the complete eight-digit module part number from the table below.

Example: LD412460 is a 2400Volt, 600 Ampere Dual Diode Isolated POW-R-BLOK™ Module

| Type | Voltage<br>Volts<br>(x100) | Current<br>Amperes<br>(x10) |
|------|----------------------------|-----------------------------|
| LD41 | 08<br>10<br>12 Thru 24     | 60                          |

**Absolute Maximum Ratings**

| Characteristics                                | Conditions                                 | Symbol       | Units           |                          |
|------------------------------------------------|--------------------------------------------|--------------|-----------------|--------------------------|
| Repetitive Peak Reverse Blocking Voltage       |                                            | $V_{RRM}$    | up to 2400      | V                        |
| Non-Repetitive Peak Reverse Blocking Voltage   |                                            | $V_{RSM}$    | $V_{RRM} + 100$ | V                        |
| (t < 5 msec)                                   |                                            |              |                 |                          |
| RMS Forward Current                            |                                            | $I_{F(RMS)}$ | 950             | A                        |
| Average Forward Current                        | 180° Conduction, $T_C=106^{\circ}\text{C}$ | $I_{F(AV)}$  | 600             | A                        |
| Peak One Cycle Surge Current, Non-Repetitive   | 60 Hz, 100% $V_{RRM}$ reapplied            | $I_{FSM}$    | 21000           | A                        |
|                                                | 50 Hz, 100% $V_{RRM}$ reapplied            | $I_{FSM}$    | 19000           | A                        |
| Peak Three Cycle Surge Current, Non-Repetitive | 60 Hz, 100% $V_{RRM}$ reapplied            | $I_{FSM}$    | 15,500          | A                        |
| Peak Ten Cycle Surge Current, Non-Repetitive   | 60 Hz, 100% $V_{RRM}$ reapplied            | $I_{FSM}$    | 13,000          | A                        |
| $I^2t$ for Fusing for One Cycle                | 8.3 milliseconds                           | $I^2t$       | 1,840,000       | $\text{A}^2 \text{ sec}$ |
|                                                | 10 milliseconds                            | $I^2t$       | 1,810,000       | $\text{A}^2 \text{ sec}$ |
| Operating Temperature                          |                                            | $T_J$        | -40 to +150     | $^{\circ}\text{C}$       |
| Storage Temperature                            |                                            | $T_{stg}$    | -40 to +150     | $^{\circ}\text{C}$       |
| Max. Mounting Torque, M6 Mounting Screw        |                                            |              | 55              | in. – Lb.                |
|                                                |                                            |              | 6               | Nm                       |
| Max. Mounting Torque, M10 Terminal Screw       |                                            |              | 110             | in. – Lb.                |
|                                                |                                            |              | 12              | Nm                       |
| Module Weight, Typical                         |                                            |              | 1500            | g                        |
|                                                |                                            |              | 3.30            | lb                       |
| V Isolation @ 25C                              |                                            | $V_{rms}$    | 3000            | V                        |

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

**POW-R-BLOK™**  
**Dual Diode Isolated Module**  
**600 Amperes / up to 2400 Volts**

### Electrical Characteristics, T<sub>J</sub>=25°C unless otherwise specified

| Characteristics                          | Symbol             | Test Conditions                                                               | Min. | Max.     | Units |
|------------------------------------------|--------------------|-------------------------------------------------------------------------------|------|----------|-------|
| Repetitive Peak Reverse Leakage Current  | I <sub>RRM</sub>   | Up to 2400V, T <sub>J</sub> =150°C                                            |      | 40       | mA    |
| Peak On-State Voltage                    | V <sub>FM</sub>    | T <sub>J</sub> =150°C, I <sub>FM</sub> =1800A                                 |      | 1.19     | V     |
| Threshold Voltage, Low-level             | V <sub>(TO)1</sub> | T <sub>J</sub> = 150°C, I = 15%I <sub>F(AV)</sub> to $\pi$ I <sub>F(AV)</sub> |      | 0.747    | V     |
| Slope Resistance, Low-level              | r <sub>T1</sub>    |                                                                               |      | 0.243    | mΩ    |
| Threshold Voltage, High-level            | V <sub>(TO)2</sub> | T <sub>J</sub> = 150°C, I = $\pi$ I <sub>F(AV)</sub> to I <sub>FSM</sub>      |      | 0.914    | V     |
| Slope Resistance, High-level             | r <sub>T2</sub>    |                                                                               |      | 0.145    | mΩ    |
| V <sub>TM</sub> Coefficients, Full Range |                    | T <sub>J</sub> = 150°C, I = 15%I <sub>F(AV)</sub> to I <sub>FSM</sub>         | A =  | 5.05E-01 |       |
|                                          |                    |                                                                               | B =  | 3.44E-02 |       |
|                                          |                    | V <sub>TM</sub> = A+ B Ln I +C I + D Sqrt I                                   | C =  | 8.13E-05 |       |
|                                          |                    |                                                                               | D =  | 6.57E-03 |       |

### Thermal Characteristics

| Characteristics                             | Symbol            |                                                                                                                                                                                                                | Max.                                                                                                             | Units                                                                                                         |
|---------------------------------------------|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Thermal Resistance, Junction to Case        | R <sub>θJ-C</sub> | Per Module, both conducting<br>Per Junction, both conducting                                                                                                                                                   | 0.0325<br>0.0650                                                                                                 | °C/W<br>°C/W                                                                                                  |
| Thermal Impedance Coefficients              | Z <sub>QJ-C</sub> | Z <sub>QJ-C</sub> = K <sub>1</sub> (1-exp(-t/t <sub>1</sub> ))<br>+ K <sub>2</sub> (1-exp(-t/t <sub>2</sub> ))<br>+ K <sub>3</sub> (1-exp(-t/t <sub>3</sub> ))<br>+ K <sub>4</sub> (1-exp(-t/t <sub>4</sub> )) | K <sub>1</sub> = 8.03E-04<br>K <sub>2</sub> = 1.03E-02<br>K <sub>3</sub> = 1.64E-02<br>K <sub>4</sub> = 3.75E-02 | t <sub>1</sub> = 3.39E-04<br>t <sub>2</sub> = 3.15E-03<br>t <sub>3</sub> = 1.06E-01<br>t <sub>4</sub> = 2.066 |
| Thermal Resistance, Case to Sink Lubricated | R <sub>θC-S</sub> | Per Module                                                                                                                                                                                                     | 0.01                                                                                                             | °C/W                                                                                                          |

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724)925-7272

## Dual Diode Module 600 Amperes / up to 2400 Volts

