

Compact low speed thick film thermal printhead (8 dots / mm)

KF2002-GE10A

The KF2002-GE10A is a standard type 12 V compact and lightweight thick-film thermal printhead, developed mainly for label printers. Maximum printing speed of 2 inch/second is possible with external simple history control.


●Applications

Bar code label printers
Portable printers
Label printers

●Features

- 1) A new pin connector structure greatly reduces the size and weight.
- 2) Completely compatible with the KF2002-GC10A (24 V standard type) in shape to enable sets with a common design.
- 3) Hard protective coating on the heating element meets the demand for long life labels.
- 4) 2-inch, 3-inch and 4-inch series are available.

●External dimensions (Units: mm)

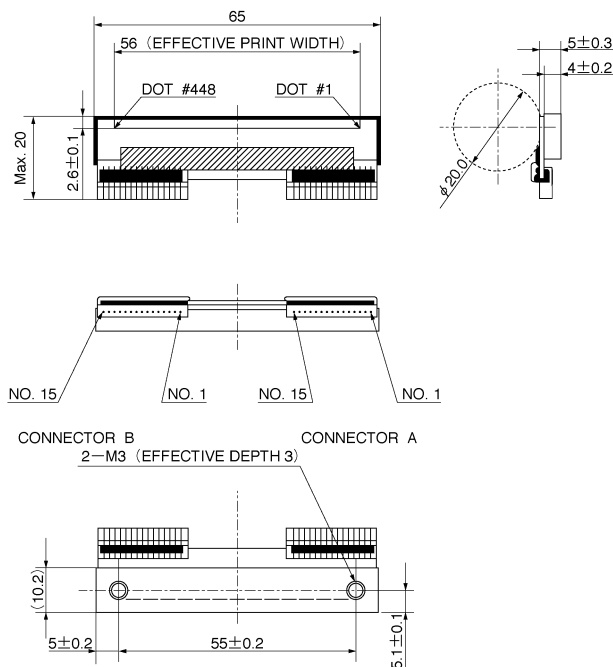

Equivalent circuit

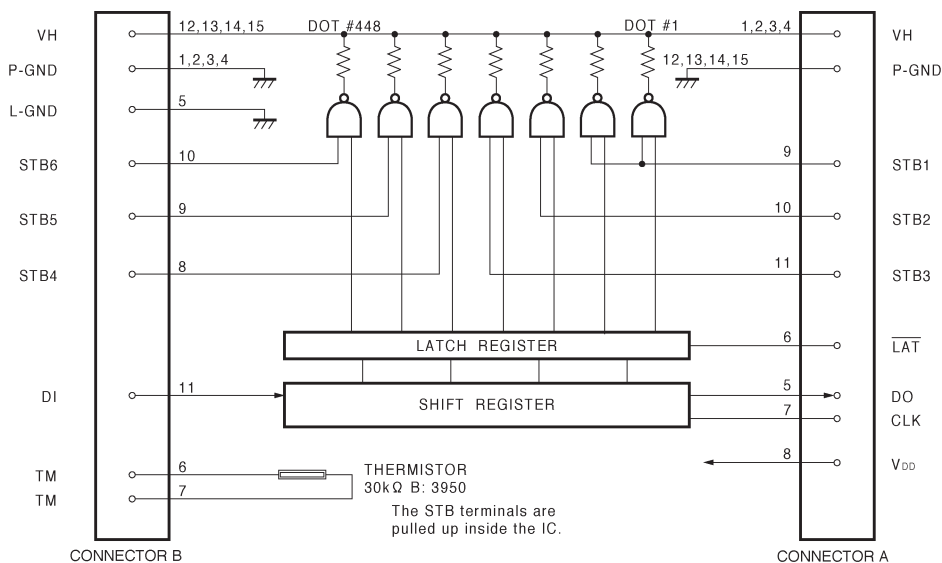


Fig. 1

Pin assignments

CONNECTOR B

No.	Circuit
1	P-GND
2	P-GND
3	P-GND
4	P-GND
5	L-GND
6	TM
7	TM
8	STB4
9	STB5
10	STB6
11	DI
12	VH
13	VH
14	VH
15	VH

CONNECTOR A

No.	Circuit
1	VH
2	VH
3	VH
4	VH
5	DO
6	$\overline{\text{LAT}}$
7	CLK
8	V _{DD}
9	STB1
10	STB2
11	STB3
12	P-GND
13	P-GND
14	P-GND
15	P-GND

L-GND: LOGIC GROUND
P-GND: POWER GROUND

●Timing chart

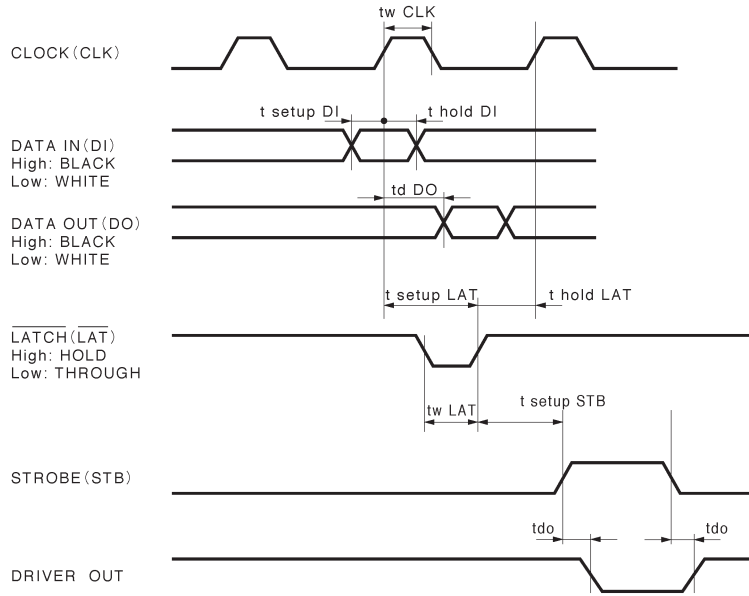


Fig. 2

●Characteristics

Parameter	Symbol	Typical	Unit
Effective printing width	—	56	mm
Dot pitch	—	0.125	mm
Total dot number	—	448	dots
Average resistance value	Rave	350	Ω
Applied voltage	V _H	12.0	V
Applied power	P _O	0.32	W / dot
Print cycle	SLT	4.0	ms

0.85	ms	Pulse width	ON TIME
148	dots	Maximum number of dots energized simultaneously	—
4	MHz	Maximum clock frequency	—
0.0	mm	Maximum roller diameter	— $\phi 2$
5×10 ⁷	km / pulses	Running life / pulse life	— 50 /
~45	°C	Operating temperature	— 5

●Electrical characteristic curves

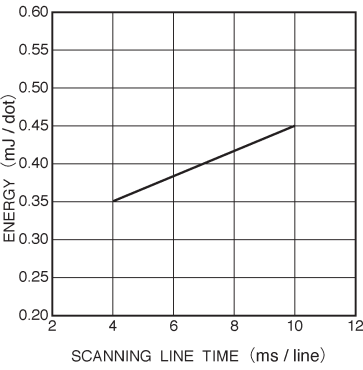


Fig. 3 Adaptive speed chart

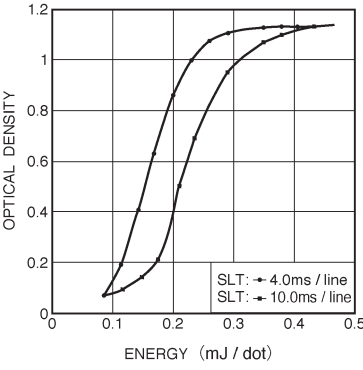


Fig. 4 Exposure density curve

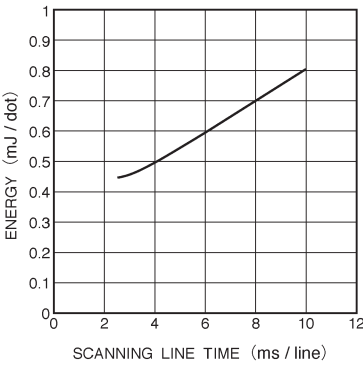


Fig. 5 Maximum energy curve

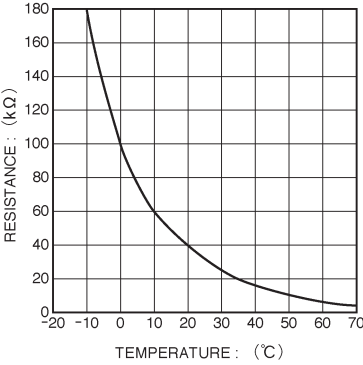


Fig. 6 Thermistor curve