

**STBV45**

## HIGH VOLTAGE FAST-SWITCHING NPN POWER TRANSISTOR

- MEDIUM VOLTAGE CAPABILITY
- LOW SPREAD OF DYNAMIC PARAMETERS
- MINIMUM LOT-TO-LOT SPREAD FOR RELIABLE OPERATION
- VERY HIGH SWITCHING SPEED

**APPLICATIONS:**



- ELECTRONIC BALLASTS FOR FLUORESCENT LIGHTING

**DESCRIPTION**

The device is manufactured using high voltage Multi Epitaxial Planar technology for high switching speeds and medium voltage capability.

It uses a Cellular Emitter structure with planar edge termination to enhance switching speeds while maintaining the wide RBSOA.

The STBV45 is designed for use in compact fluorescent lamp application.

**TO-92****INTERNAL SCHEMATIC DIAGRAM****ABSOLUTE MAXIMUM RATINGS**

Symbol	Parameter	Value	Unit
$V_{CES}$	Collector-Emitter Voltage ( $V_{BE} = 0$ )	600	V
$V_{CEO}$	Collector-Emitter Voltage ( $I_B = 0$ )	400	V
$V_{EBO}$	Emitter-Base Voltage ( $I_C = 0$ )	9	V
$I_C$	Collector Current	0.75	A
$I_{CM}$	Collector Peak Current ( $t_p < 5$ ms)	1.5	A
$I_B$	Base Current	0.4	A
$I_{BM}$	Base Peak Current ( $t_p < 5$ ms)	0.75	A
$P_{tot}$	Total Dissipation at $T_{amb} = 25$ °C	0.95	W
$T_{stg}$	Storage Temperature	-65 to 150	°C
$T_j$	Max. Operating Junction Temperature	150	°C

**THERMAL DATA**


$R_{thj-amb}$	Thermal Resistance Junction-ambient	Max	130	$^{\circ}\text{C/W}$
---------------	-------------------------------------	-----	-----	----------------------

**ELECTRICAL CHARACTERISTICS** ( $T_{case} = 25^{\circ}\text{C}$  unless otherwise specified)


Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
$I_{CEV}$	Collector Cut-off Current ( $V_{BE} = -1.5\text{V}$ )	$V_{CE} = 600\text{ V}$				250	$\mu\text{A}$
$I_{EBO}$	Emitter Cut-off Current ( $I_C = 0$ )	$V_{EB} = 9\text{ V}$				1	mA
$V_{CEO(sus)}^*$	Collector-Emitter Sustaining Voltage ( $I_B = 0$ )	$I_C = 1\text{ mA}$ $L = 25\text{ mH}$		400			V
$V_{CE(sat)}^*$	Collector-Emitter Saturation Voltage	$I_C = 0.2\text{ A}$	$I_B = 40\text{ mA}$		0.2	0.5	V
		$I_C = 0.3\text{ A}$	$I_B = 75\text{ mA}$		0.3	1.0	V
		$I_C = 0.4\text{ A}$	$I_B = 135\text{ mA}$		0.4	1.5	V
$V_{BE(sat)}^*$	Base-Emitter Saturation Voltage	$I_C = 0.2\text{ A}$	$I_B = 40\text{ mA}$			1.0	V
		$I_C = 0.3\text{ A}$	$I_B = 75\text{ mA}$			1.2	V
$h_{FE}^*$	DC Current Gain	$I_C = 0.2\text{ A}$	$V_{CE} = 5\text{ V}$	10		30	
		$I_C = 0.4\text{ A}$	$V_{CE} = 5\text{ V}$	5		20	
$t_f$	INDUCTIVE LOAD Fall Time	$I_C = 0.2\text{ A}$ $I_{B1} = -I_{B2} = 40\text{ mA}$	$V_{clamp} = 300\text{ V}$ $L = 3\text{ mH}$		0.3		$\mu\text{s}$

\* Pulsed: Pulse duration = 300 $\mu\text{s}$ , duty cycle = 1.5 %


Safe Operating Area

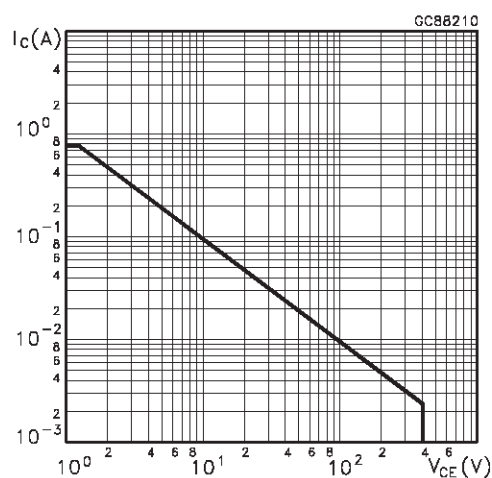


Derating Curve

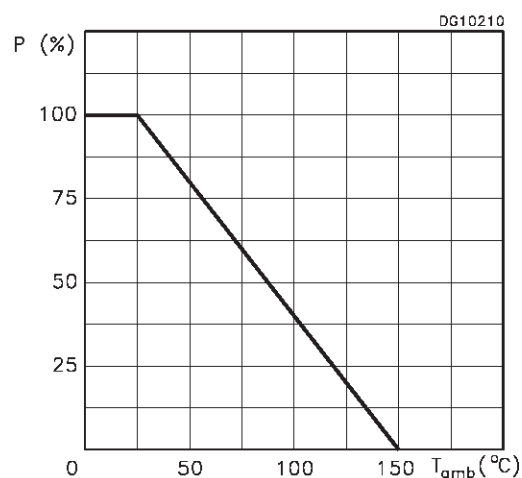


DC Current Gain

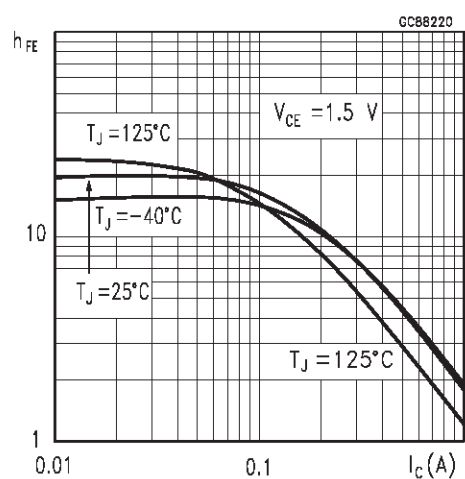


DC Current Gain

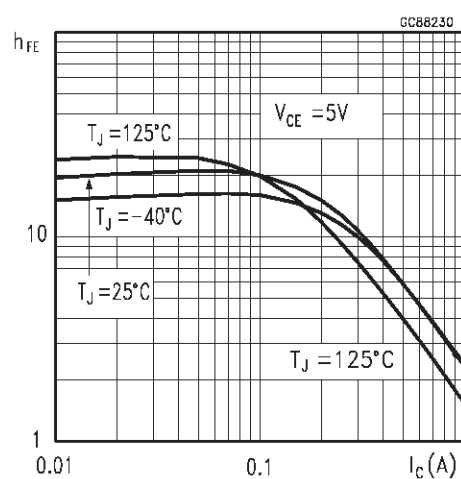

Collector Emitter Saturation Voltage

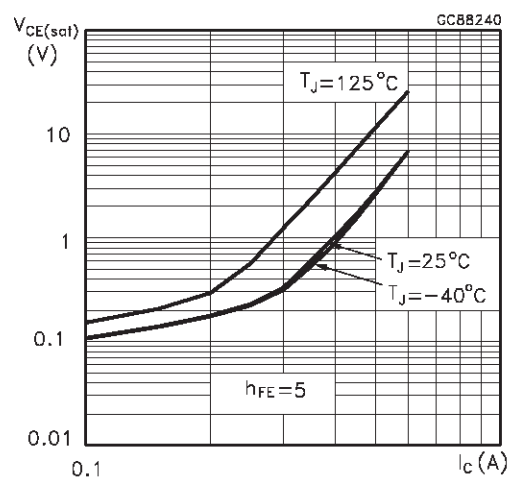


Base Emitter Saturation Voltage

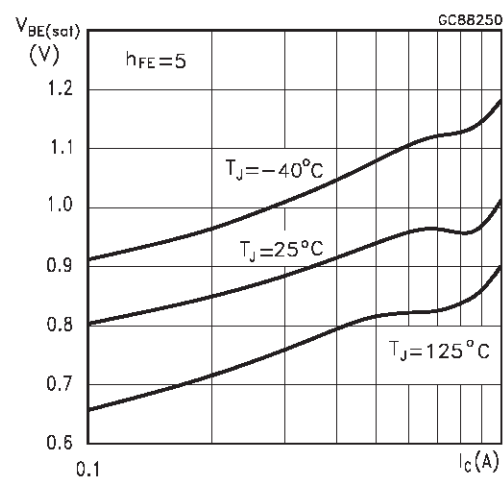

TO-92 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	4.58		5.33	0.180		0.210
B	4.45		5.2	0.175		0.204
C	3.2		4.2	0.126		0.165
D	12.7			0.500		
E		1.27			0.050	
F	0.4		0.51	0.016		0.020
G	0.35			0.14		

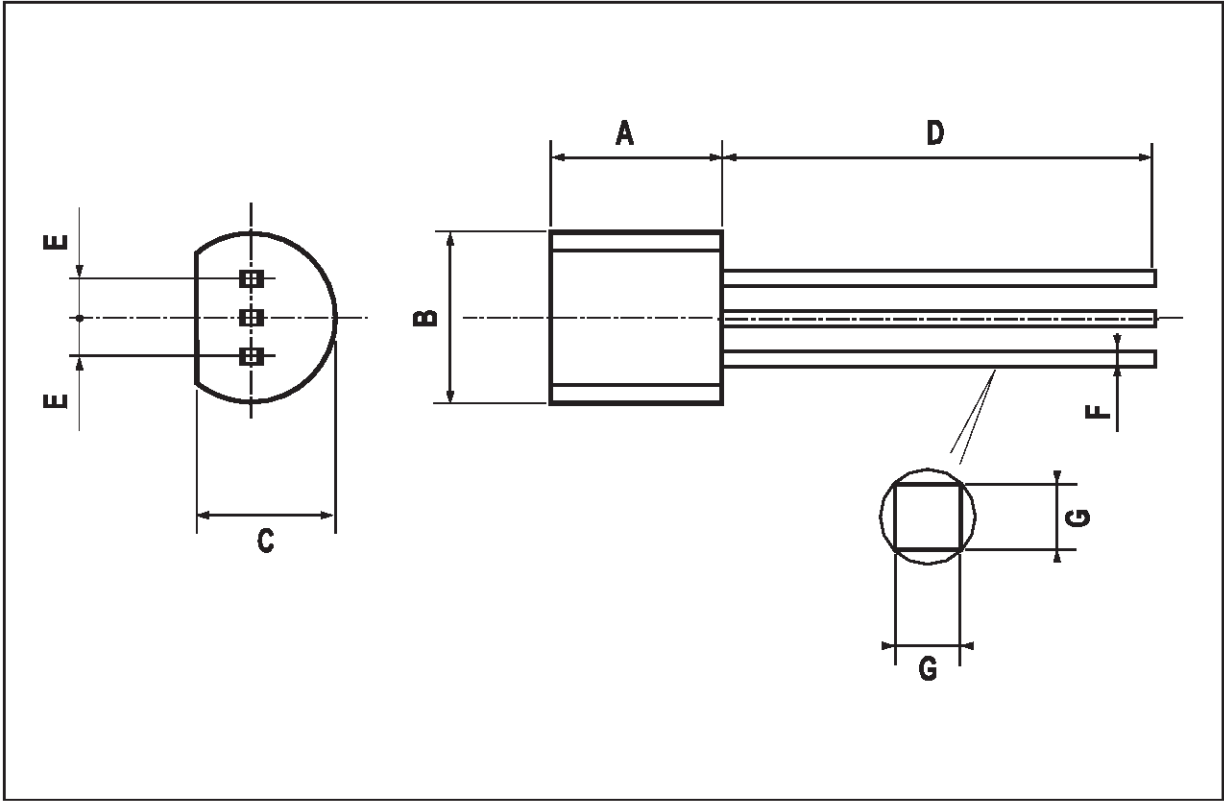

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics

© 2000 STMicroelectronics – Printed in Italy – All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco -  
Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>

