



STPC VEGA


X86 CORE PC COMPATIBLE SOC with ETHERNET and USB

PRODUCT PREVIEW


- PENTIUM® II CLASS PROCESSOR RUNNING IN X1 MODE UP TO 133MHZ OR X2 MODE UP TO 200MHZ
- 64 BIT SDRAM CONTROLLER RUNNING AT UP TO 100 MHZ
- PCI 2.2 COMPLIANT MASTER/SLAVE CONTROLLER
- USB HOST CONTROLLER (OCHI)
- 10/100 ETHERNET MAC
- INTEGRATED PERIPHERAL CONTROLLER WITH SUPPORT FOR EXTERNAL RTC
- ULTRA DMA-66 IDE CONTROLLER
- POWER MANAGEMENT UNIT
- 16-BIT LOCAL BUS WITH 2 DMA CHANNELS
- 1 I2C BUS CONTROLLER
- UART (1 RXTX)
- IEEE 1149.1 JTAG INTERFACE
- 8 GENERAL PURPOSE IO
- PROGRAMMABLE CLOCKS
- 0.18 MICRON TECHNOLOGY.
- 1.8V CORE & 3.3V I/O'S
- MAXIMUM POWER DISSIPATION; 3.5W @ 200MHZ

DESCRIPTION

The STPC VEGA integrates a fully static Pentium® II® Class processor, fully compatible with Industry Standard, and combines it with powerful chipset to provide a general purpose PC compatible subsystem on a single device. The device is packaged in a 388 Ball Grid Array (PBGA).

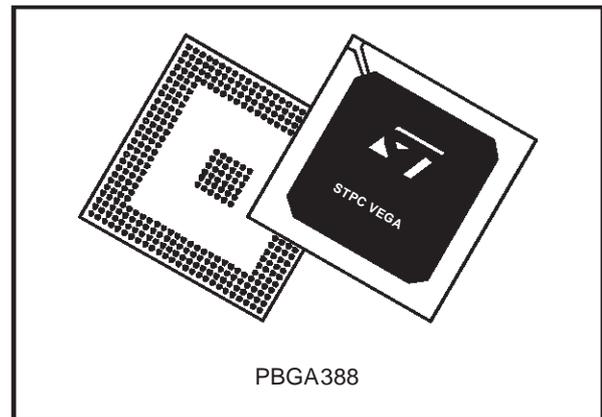

Logic Diagram

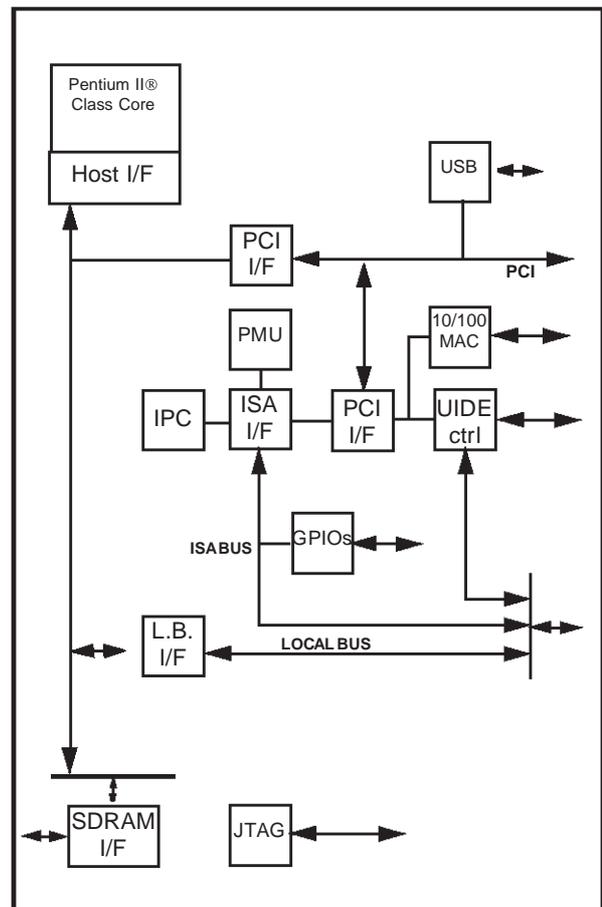

■ **X86 Processor**

- x86 Pentium® II class compatible processor
 - 3 Issue integer 6 stage pipeline/clock
 - 3 issue MMX®/clock
 - Pipelined FPU
- Bus clock with skew correction
- Internal core clocks generated as multiples of bus clock with multiplication factors of X1, X2, X2.5, X3, X3.5

■ **SDRAM Interface**

- 64 bit data bus
- 100 MHz maximum SDRAM clock
- 8 MByte to 128 MByte memory size
- Supports 16 Mbit, 64 Mbit, 128Mbit and 256 Mbit memories
- Support of -8, -10, -12, -13, -15 memory parts
- Supports Buffered, non-buffered & registered DIMMs
- Programmable latency
- 32bit accesses not supported
- Autoprecharge not supported
- Power-down not supported

■ **PCI Controller Master/Slave**

- Fully compliant with PCI Version 2.2 specification.
- Integrated PCI arbitration interface. Up to three external masters can directly connected.
- Master/slave bridge to USB, LAN, UIDE & ISA cycles.
- Support for burst read/write from PCI master.
- 0.20X, 0.25X, 0.33X and 0.5X Host clock PCI clock.

■ **ISA Master/Slave**

- Generates the ISA clock from either 14.318Mhz oscillator clock or PCI clock.
- Supports programmable extra wait state for ISA cycles.
- Supports I/O recovery time for back to back I/O cycles
- Fast Gate A20 and Fast reset
- Supports Flash ROM
- Supports ISA hidden refresh
- Buffered DMA and ISA master cycles to reduce the bandwidth utilization of PCI and system bus.

■ **Local Bus**

- Multiplxed with ISA interface.
- 16bit bus data path with word steering capability
- 2 cacheable banks of 16Mbyte flash devices (boot block shadowed to 000F0000h)
- Programmable timing with host clock granularity for flash accesses
- 32bit flash burst support
- Two level hardware key protection for flash boot block protection
- Up to four IO devices supported with programmable start address & size
- IO device timing (setup & recovery time) programmable
- No interrupt support

■ **Integrated Peripherals Controller**

- Interrupt Controller: 8259 compatible (2 Interrupt controllers)
- DMA Controller: 8237 compatible (2 DMA controllers)
- Page register.
- Counter 0 and counter 1 gates are always on, counter 2 is controlled by writing to Port B.
- Supports external RTC

■ **Ultra DMA-66 IDE Controller**

- Supports UIDE hard drives drives larger than 528MB.
- Support for two connectors to allow up to four drives.
- Support for CD-ROM and tape peripherals.
- Support for 11.1/16.6 Mbytes/second, I/O Channel Ready PIO data transfers.
- Supports up to 66 Mbytes/second, UDMA data transfers.
- Ultra DMA supports CRC-16 error checking protocol (no correction supported)
- Support for PIO mode 3 & 4 and DMA mode 1 & 2.
- Backward compatibility with IDE (ATA-1).

■ **GPIO**

- Individual pins programmable as either input or output
- Interrupt generation with selectable masking

■ **USB Host Controller**

- Open HCI Rev 1.1 compatible
- USB Rev 1.1 compatible
- Root hub with two down stream ports with power switching control
- Support of both low & high speed USB devices
- Support of system management interrupt (SMI)

- **10/100 Ethernet Controller**
- Compliant with IEEE 802.3, 802.3u specification
- Supports 10/100 Mb/s data transfer rates.
- IEEE 802.3 compliant MII interface to talk to an external PHY.
- VLAN support.
- Supports both full-duplex/half-duplex operations.
- Support of CSMA/CD Protocol for half-duplex.
- Supports flow-control for full-duplex operation.
- Collision detection and auto retransmission on collisions in half-duplex mode.
- Management support by using variety of counters.
- Preamble generation and removal.
- Automatic 32 bit CRC generation and checking.
- Options to insert PAD/CRC32 on transmit.
- Options for Automatic Pad stripping on the receive packets.
- Provides External and internal loop back capability on the MII Interface.
- Contains a variety of flexible address filtering modes on the Ethernet side: - One 48 bit Perfect address - 64 hash-filtered multicast addresses - Pass all multicast addresses - Promiscuous Mode - Pass all incoming packets with a status report.

- **UARTs**
- One UART RxTx only
- Programmable word length, stop bits and parity
- Programmable baud rate generator
- Interrupt generator
- Loop-back mode
- Scratch register
- Two 16-byte FIFOs

- **Power Management Unit**
- Four power saving modes: On, Doze, Standby, Suspend
- Programmable system activity detector
- Supports Intel & Cyrix SMI & SMM
- Supports STPCLK#

- **I2C Bus Controller**
- One I2C compliant master/slave bus controllers



Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© 2000 STMicroelectronics - All Rights Reserved

The ST logo is a registered trademark of STMicroelectronics.

All other names are the property of their respective owners.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - France - Germany - Italy - Japan - Korea - Malaysia - Malta - Mexico - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.

