

GTR Module

Silicon N Channel IGBT

High Power Switching Applications

Motor Control Applications


Features

- 6 IGBTs are built into 1 package
- High speed: $t_f = 0.35\mu\text{s}$ (Max.) ($I_C = 20\text{A}$)
 $t_{rr} = 0.15\mu\text{s}$ (Max.) ($I_C = 20\text{A}$)
- Low saturation voltage: $V_{CE(sat)} = 4.0\text{V}$ (Max.) ($I_F = 20\text{A}$)
- Enhancement mode
- The electrodes are isolated from case

Maximum Ratings ($T_a = 25^\circ\text{C}$)


CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Emitter Voltage		V_{CES}	600	V
Gate-Emitter Voltage		V_{GES}	± 20	V
Collector Current	DC	I_C	20	A
	1ms	I_{CP}	40	
Forward Current	DC	I_F	20	A
	1ms	I_{FM}	40	
Collector Power Dissipation ($T_c = 25^\circ\text{C}$)		P_C	60	W
Junction Temperature		T_j	150	$^\circ\text{C}$
Storage Temperature Range		T_{stg}	-40 ~ 125	$^\circ\text{C}$
Isolation Voltage		V_{Isol}	2500 (AC 1 Minute)	V
Screw Torque		—	1.5	N ¥ m

Unit in mm

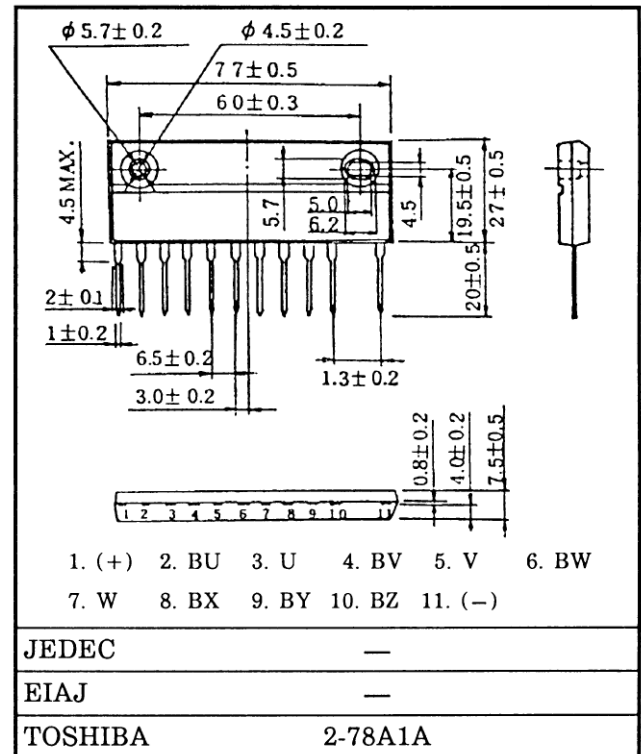







Weight : 44g







Equivalent Circuit


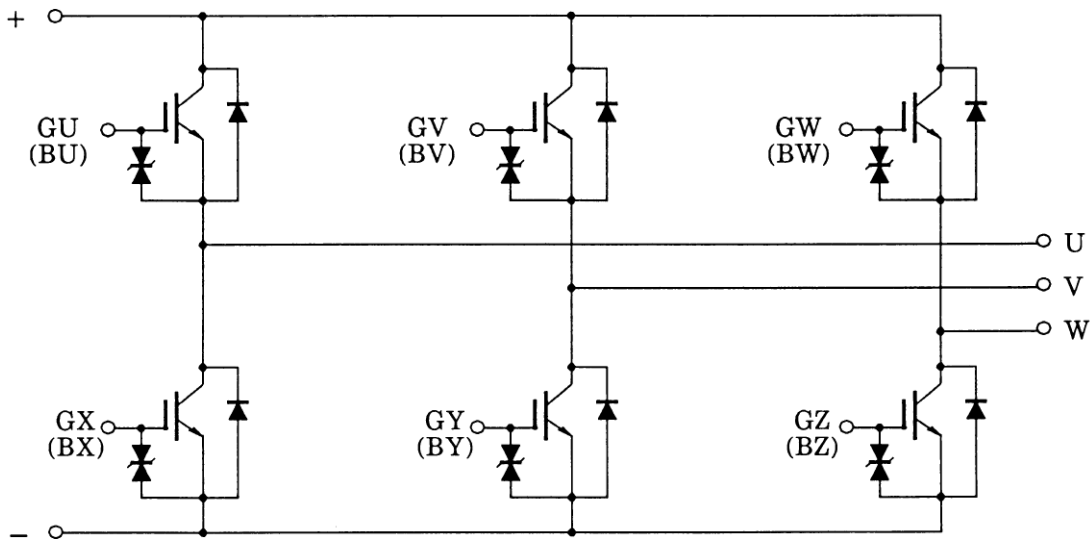


Electrical Characteristics (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gate Leakage Current		I_{GES}	$V_{GE} = \pm 20V, V_{CE} = 0$	—	—	± 20	μA
Collector Cut-off Current		I_{CES}	$V_{CE} = 600V, V_{GE} = 0$	—	—	1.0	mA
Collector-Emitter Voltage		$V_{(BR) CES}$	$I_C = 10mA, V_{GE} = 0$	600	—	—	V
Gate-Emitter Cut-off Voltage		$V_{GE (OFF)}$	$I_C = 20mA, V_{CE} = 5V$	3.0	—	6.0	V
Collector-Emitter Saturation Voltage		$V_{CE (sat)}$	$I_C = 20A, V_{GE} = 15V$	—	3.0	4.0	V
Input Capacitance		C_{ies}	$V_{CE} = 10V, V_{GE} = 0, f = 1MHz$	—	1320	—	pF
Switching Time	Rise Time	t_r		—	0.3	0.6	μs
	Turn-on Time	t_{on}		—	0.4	0.8	
	Fall Time	t_f		—	0.2	0.35	
	Turn-off Time	t_{off}		—	0.5	1.0	
Forward Voltage		V_F	$I_F = 20A, V_{GE} = 0$	—	1.7	2.5	V
Reverse Recovery Time		t_{rr}	$I_F = 20A, V_{GE} = -10V$ $di/dt = 50A/\mu s$	—	0.08	0.15	μs
Thermal Resistance		$R_{th (j - c)}$	Transistor	—	—	2.08	$^{\circ}C/W$
			Diode	—	—	3.09	

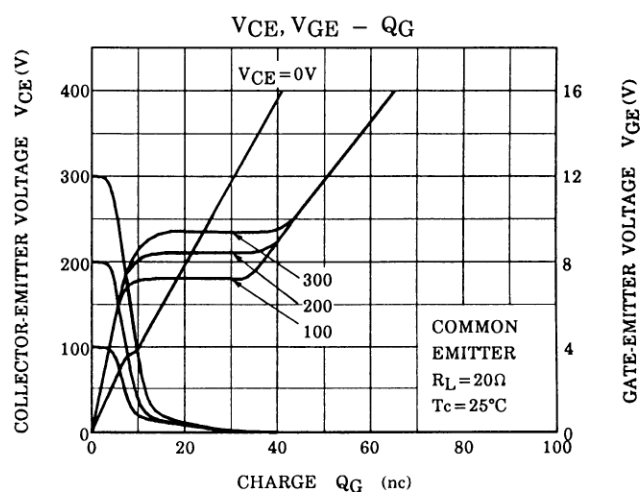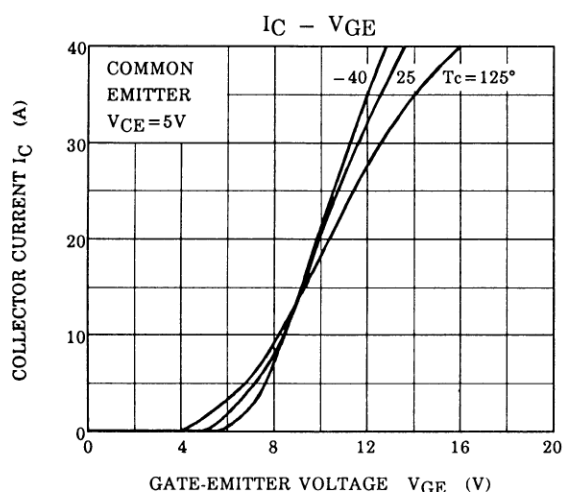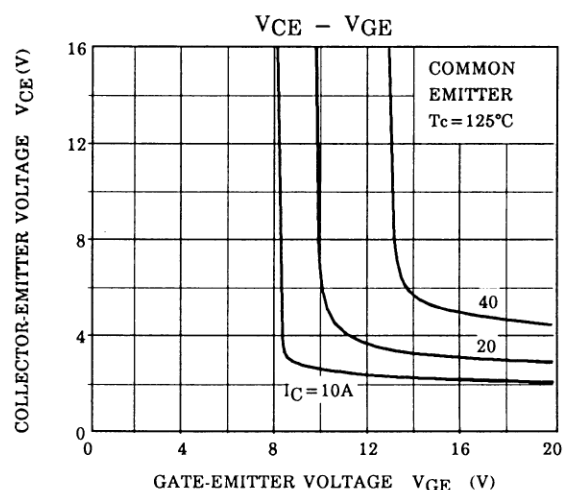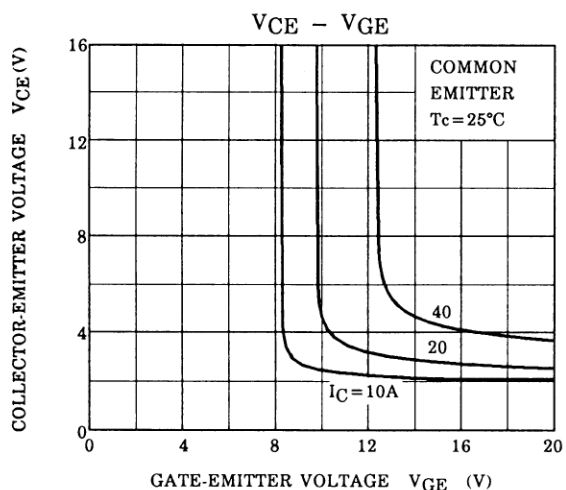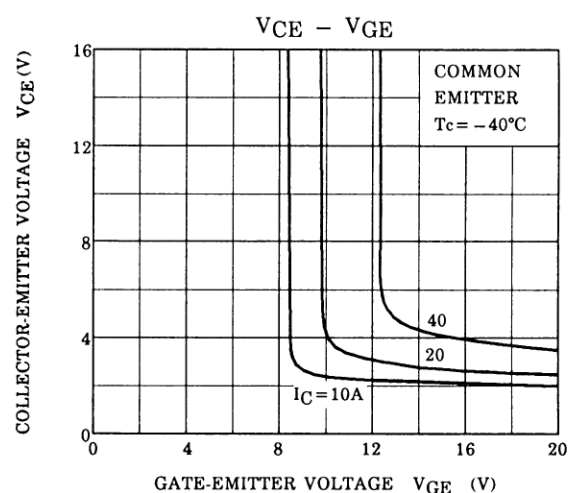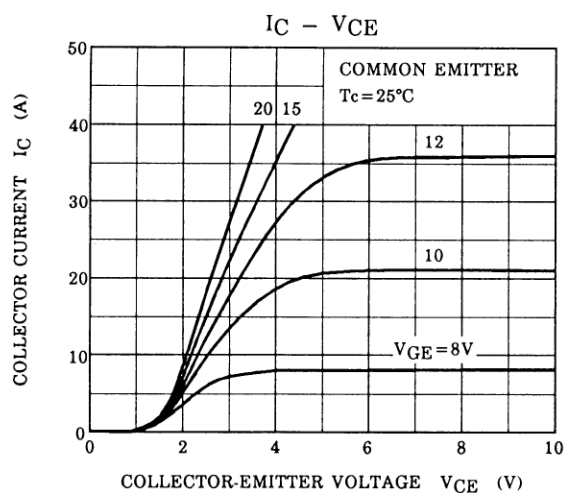

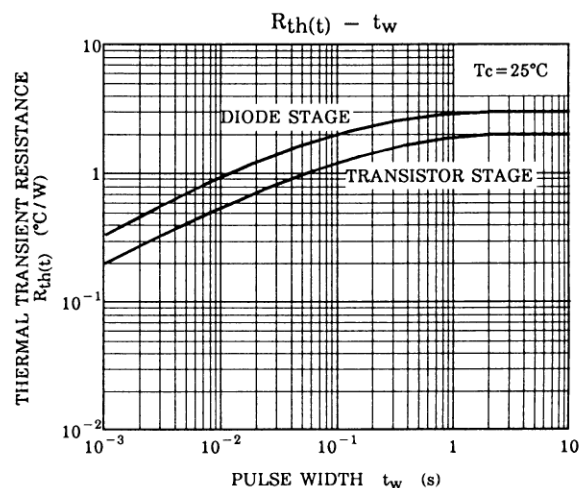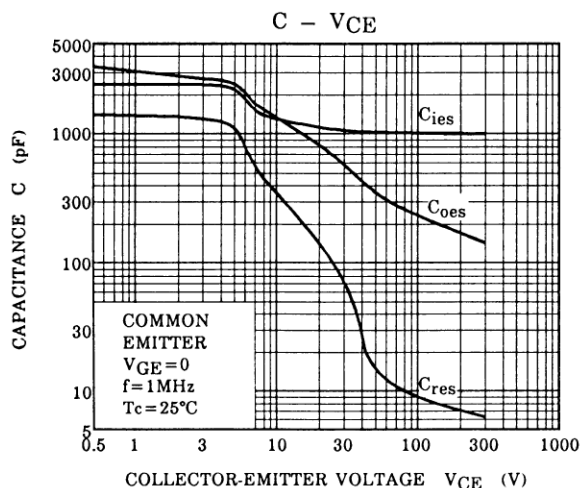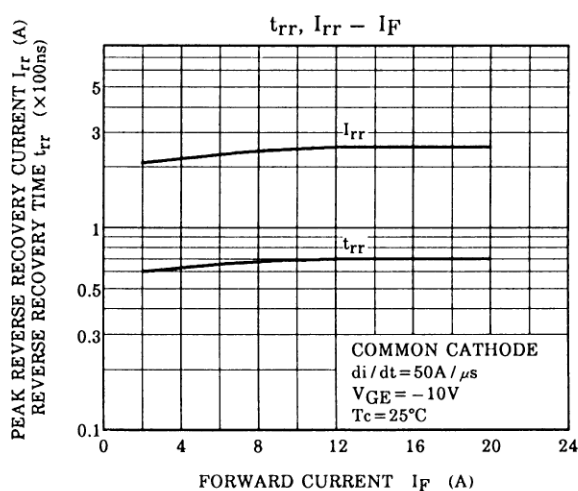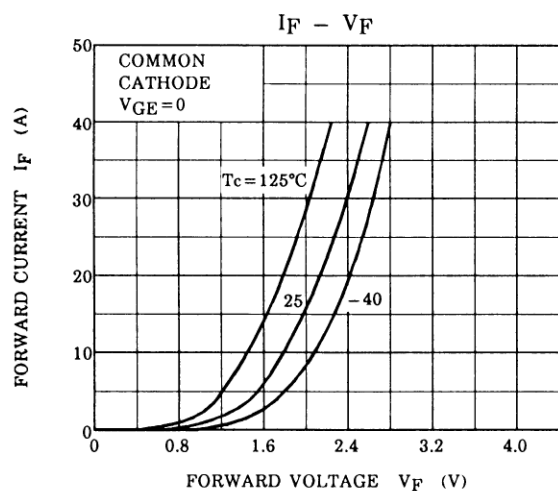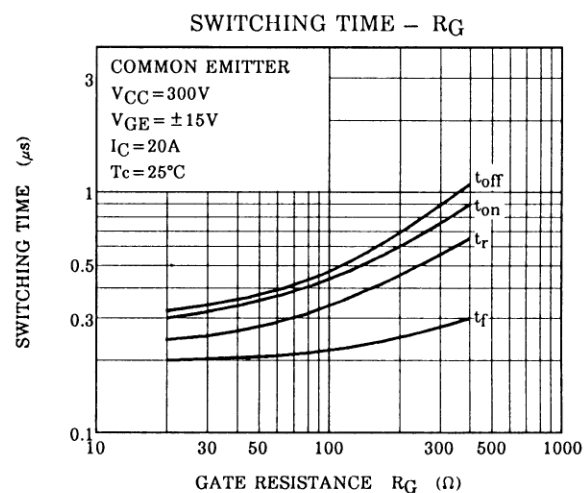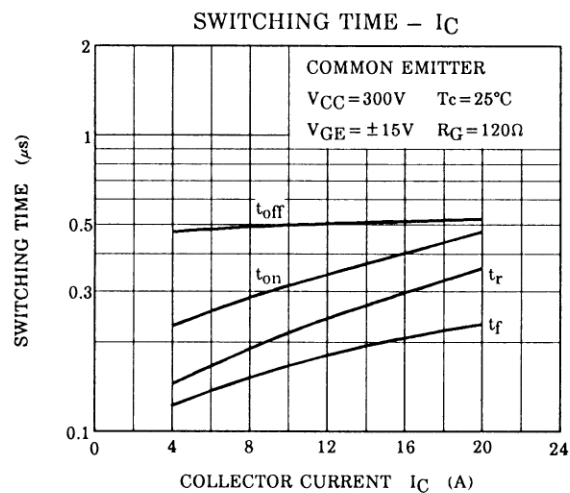

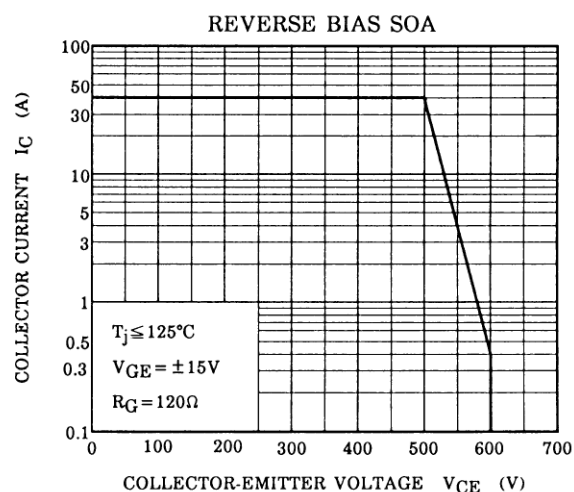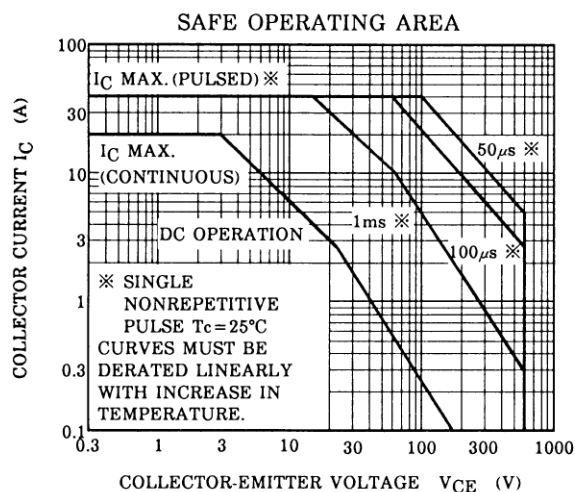

The information contained here is subject to change without notice.

The information contained herein is presented only as guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others. These TOSHIBA products are intended for usage in general electronic equipments (office equipment, communication equipment, measuring equipment, domestic electrification, etc.) Please make sure that you consult with us before you use these TOSHIBA products in equipments which require high quality and/or reliability, and in equipments which could have major impact to the welfare of human life (atomic energy control, spaceship, traffic signal, combustion control, all types of safety devices, etc.). TOSHIBA cannot accept liability to any damage which may occur in case these TOSHIBA products were used in the mentioned equipments without prior consultation with TOSHIBA.